

THIS SHEET APPLIES TO MODELS HAVING  
SERIAL NO.'S. 15,000 AND UP.

DESCRIPTION

PATENTED - OTHERS PENDING

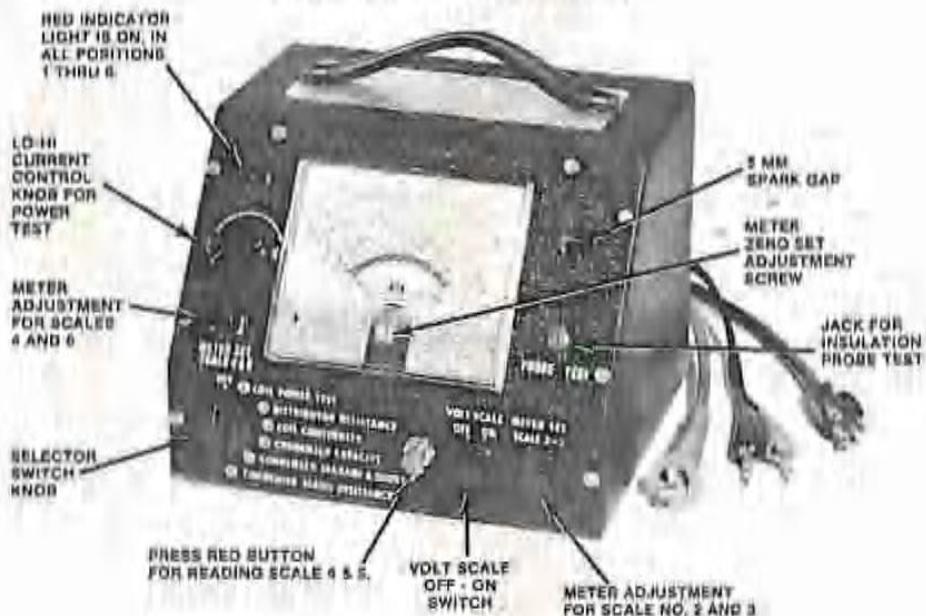


Figure 1

SERVICE NOTES

*May we suggest, when testing, place Ignition Analyzer as well as Component Ignition Parts on an INSULATED OR WOODEN TABLE TOP. This will prevent any leakage or shock hazards.*

Your Merc-O-Tronic Ignition Analyzer is equipped with either a motor or a vibrator. The motor has oil lite bearings and should be lubricated with a light oil once every six months. Lubricate cam wick at same time. (DO NOT OVER LUBRICATE.) If replacement of breaker point is required, order from Merc-O-Tronic Instruments Corporation as this is a special breaker assembly. Breaker points are to be set at 0.013. Pressure not to exceed 15 oz.

If vibrator fails to operate check and make certain that vibrator is in socket. When inserting vibrator, make certain pins line up with holes in socket.

NOTE: This is a special vibrator, if replacement is necessary order from your distributor or direct from factory. Merc-O-Tronic Part No. MIC #12-191. (DO NOT ATTEMPT TO USE ANY STOCK VIBRATOR.)

Your analyzer is equipped with a Burgess 4F5H 7 1/2 volt battery. If unable to obtain locally, order direct from Merc-O-Tronic.

Be sure and specify type of battery required and serial number of unit.

# OPERATING INSTRUCTIONS

For Model 98 Beginning with Serial No. 15,000

Before any attempt is made to use this instrument, read the following instructions. They were prepared to enable those having only a minimum of experience to test and repair the magneto ignition system equally as well as the electrical specialist. Adhere to the instructions in sequence. Do not jump from the first test to the fourth or the third to the fifth, etc.

1. Your Merc-O-Tronic Magneto Analyzer is shipped with a dry battery installed in the unit. Remove the 2 metal screws at the top of the panel. This will allow the top to swing back, and you will notice that the positive (red) battery lead is disconnected. Connect this lead to the positive (+) post of the battery. (When replacing battery, make certain positive terminal is to right side of tester and that terminal nuts are tight.)
2. "Zero" meter by turning the small adjustment screw on front of meter until pointer hand lines up with zero on Scale No. 1, left side. This is set at the factory, but should be rechecked.
3. To determine the battery life do the following: Move switch for volt scale No. 1 to "ON" position. Attach small black test lead to negative and red small test lead to positive lugs on battery. Then place selector switch on No. 1 position. (Red pilot will be on and vibrator will be running). Read red figures on top of Scale No. 1. Battery should check not less than 6.5 volts or proper readings cannot be obtained. (Each division on volt scale equals 0.5 volt).

For bench use this analyzer can be connected to an 8 volt storage battery power supply. For 8 volts tap off 4 cells from a 12 volt storage battery.

4. Your Merc-O-Tronic Ignition Analyzer is now ready for use.

The following batteries can be used in place of Burgess 4F5H:

Eveready 715	Olin 5605	Ray-O-Vac 903
Neda 903	RCA VS139	Mallory M903

To check low OHM resistance values see page 20.

See Page 14 for Voltage Test Procedures.

CAUTION: DO NOT CONNECT TEST LEADS TOGETHER WHEN SELECTOR SWITCH IS TURNED TO POSITION NO. 1 AS THIS IS A DIRECT SHORT ON THE BATTERY.

FOR ALL TEST PROCEDURES INVOLVING SELECTOR SWITCHES 1 THRU 6 -- VOLT SCALE SWITCH MUST BE IN "OFF" POSITION.

5. To check condenser leakage (on Scale No. 5) and condenser capacity (on Scale No. 4), plug cord into 115-volt 60-cycle AC electrical outlet. This is the only time 115-volt 60-cycle AC is required. To read, press red button, the electrical charge placed in condenser is automatically discharged when releasing red button.
6. SPECIAL NOTICE: When checking Lauson Power Products Coils #30546, 30560 and 29632 or any coil with internal condenser the 5 m.m. pot spark will appear fuzzy. DO NOT let this fuzzy spark mislead you. If spark is steady, coil is good.

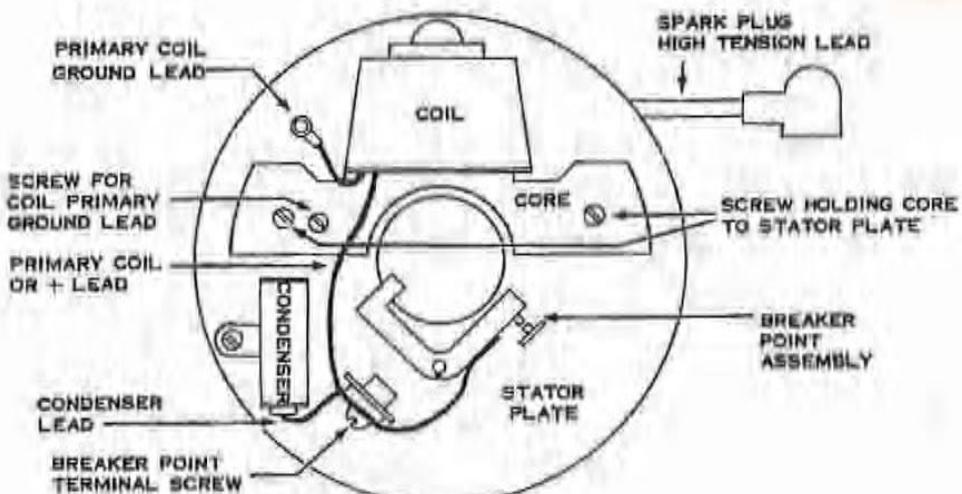


Figure 2

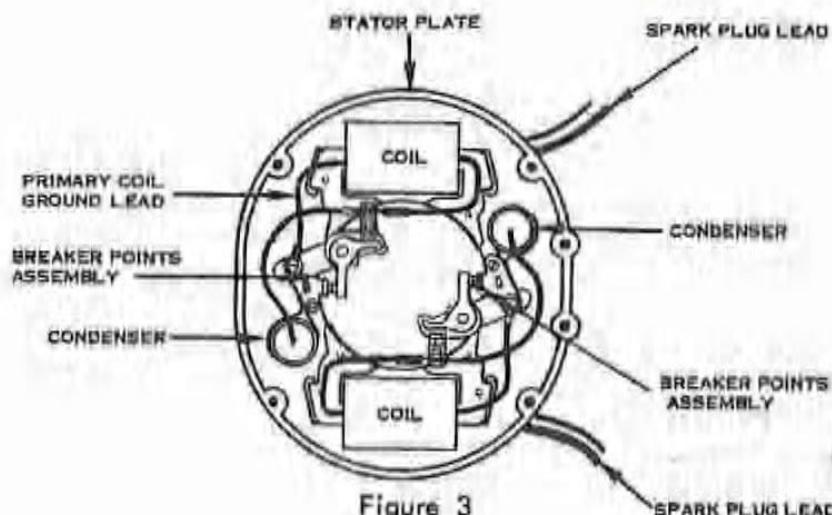


Figure 3

#### COIL POWER TEST SNOWMOBILE TYPE IGNITION

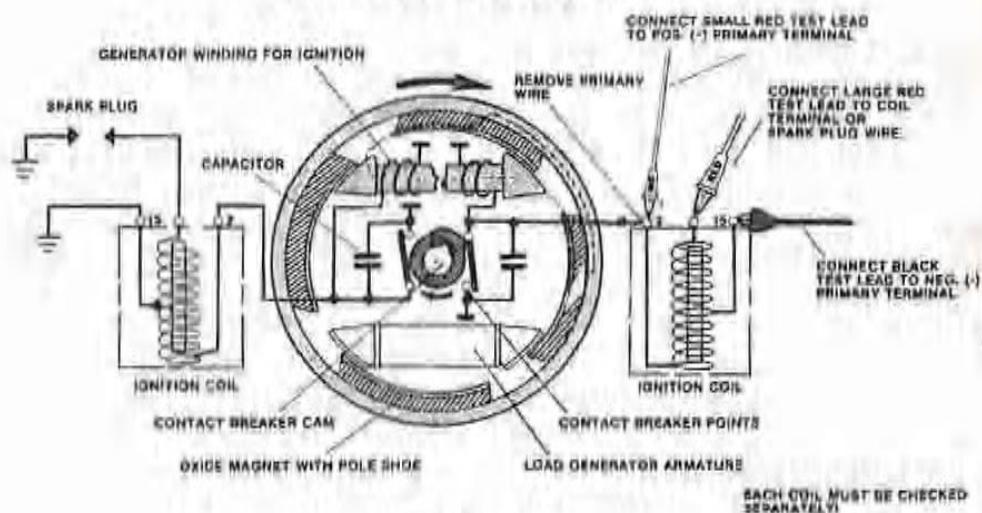


Figure 4

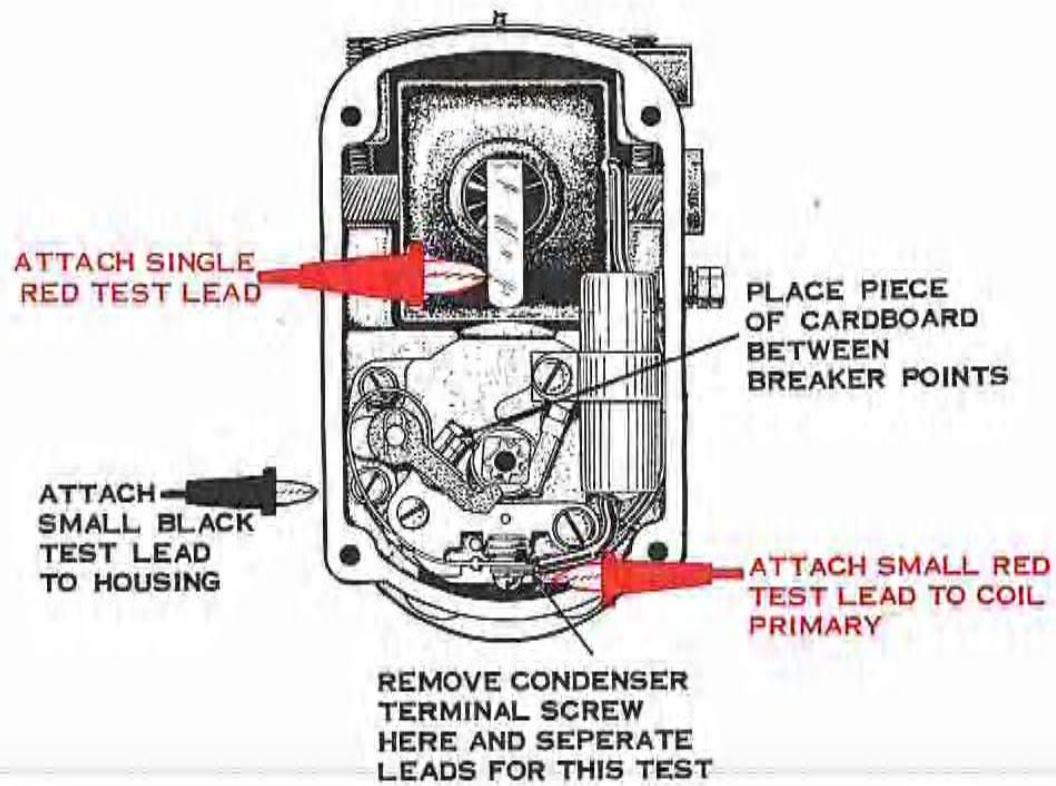


Figure 5

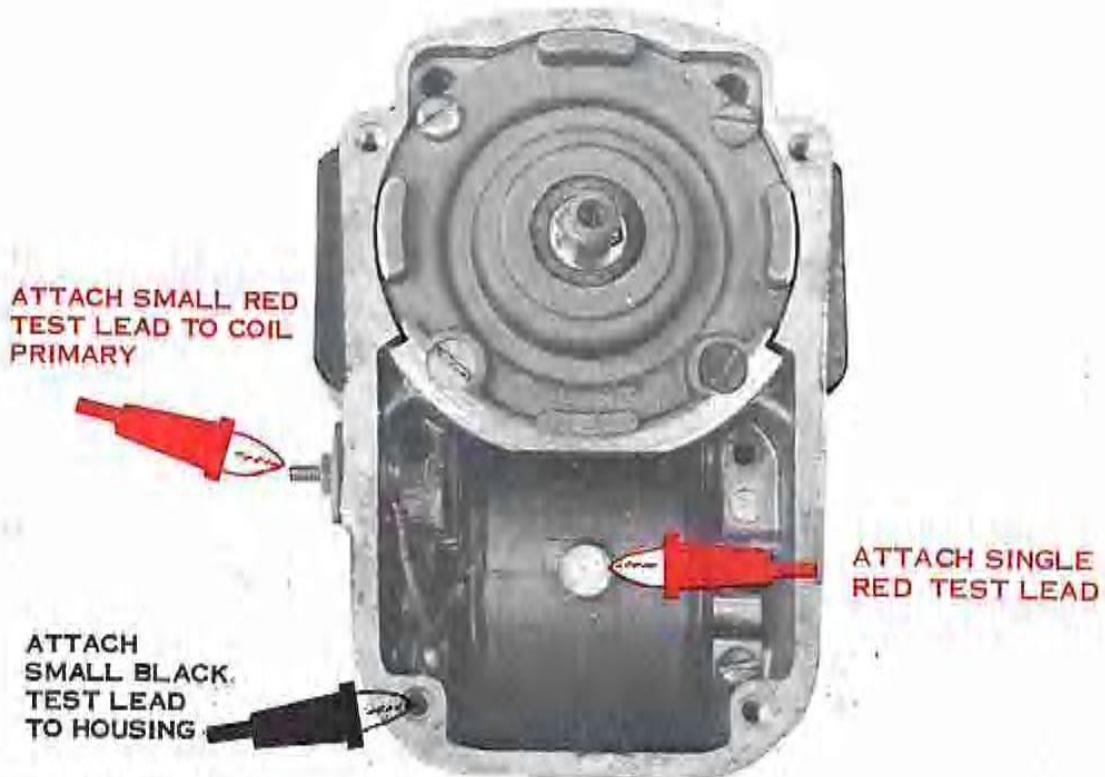


Figure 6

## COIL POWER TEST

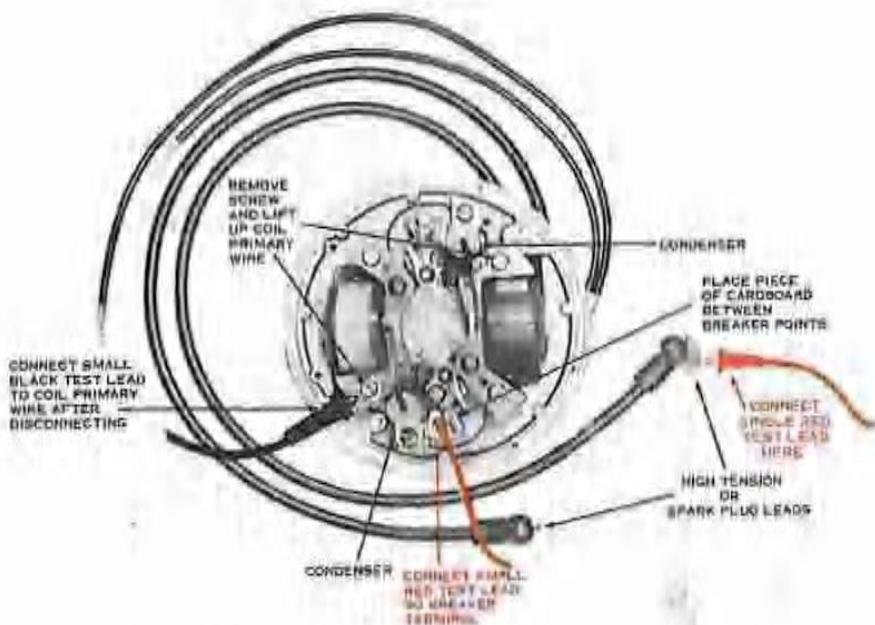


Figure 7

1. It is not necessary to remove magneto assembly from engine or parts from stator plate assembly.
2. Place a piece of cardboard between breaker points to insulate.
3. Connect small black test lead to coil primary ground wire.
4. Connect small red test lead to coil primary lead or breaker point assembly terminal.
5. Connect single red test lead to terminal of spark plug wire.
6. After wiring hookup is made, as shown in illustrations 6 or 7, the current control knob should be to extreme left, beyond "LO" position.
7. Turn selector switch to position No. 1 ("Coil Power Test").
8. Slowly turn current control knob clockwise and note the current value on Scale No. 1.
9. When it reaches the operating amperage for that particular winding, shown in this manual under Manufacturer's Specifications, stop and note the 5 MM spark gap, it should fire steadily.
10. If the spark is faint, intermittent or no spark has occurred at this reading, the coil is defective and must be replaced.
11. If a steady spark occurs below Manufacturer's Specifications, this indicates a very good coil.

## COIL HIGH SPEED TEST

12. If the coil is good on Coil Power Test, preceding, perform the High Speed Test.
13. Continue turning the current control knob clockwise to the right, for maximum reading of meter.
14. The spark gap should fire steadily.
15. If the spark is faint, intermittent or no spark occurs, the coil is defective at high speed and must be replaced.
16. Complete this test as quickly as possible and immediately upon completion, turn selector switch and power control to "OFF" position.

On Fairbanks-Morse and similar Magnetos, it is necessary to remove the distributor cap and end cap so **single red test lead** can be attached to secondary terminal of coil "see Fig. 5". **Small red test lead** is attached to coil primary lead after the lead has been removed from breaker point terminal. The small black test lead is attached to housing "see Fig. 5".

When checking coil on stator plate with crankshaft type high inductance rotating magnet (i.e. Wico, Seintilla and similar type magnetos), be sure rotating magneto is in **neutral position** (magnets not opposite the coil core).

**NOTE:** When testing coils off stator plate, it is absolutely necessary that the laminated core be in the coil.

**NOTE:** On Fairbanks-Morse and similar type magnetos, the coil primary lead must be removed from breaker point terminal during this test. This also applies to all coils which are permanently grounded to laminations. See Figure 5.

Coils with Two (2) Secondaries Testing, see Page 23.

**Stator plate with 2 coils mounted, each coil to be checked separately as noted in Fig. 7.**

**NOTE:** All coils should start firing 1 to 3 divisions before rated specifications. Coils which first start to fire on "rated" specifications are considered marginal and would give considerable trouble in starting engine and should be considered as defective.

# COIL SURFACE INSULATION TEST

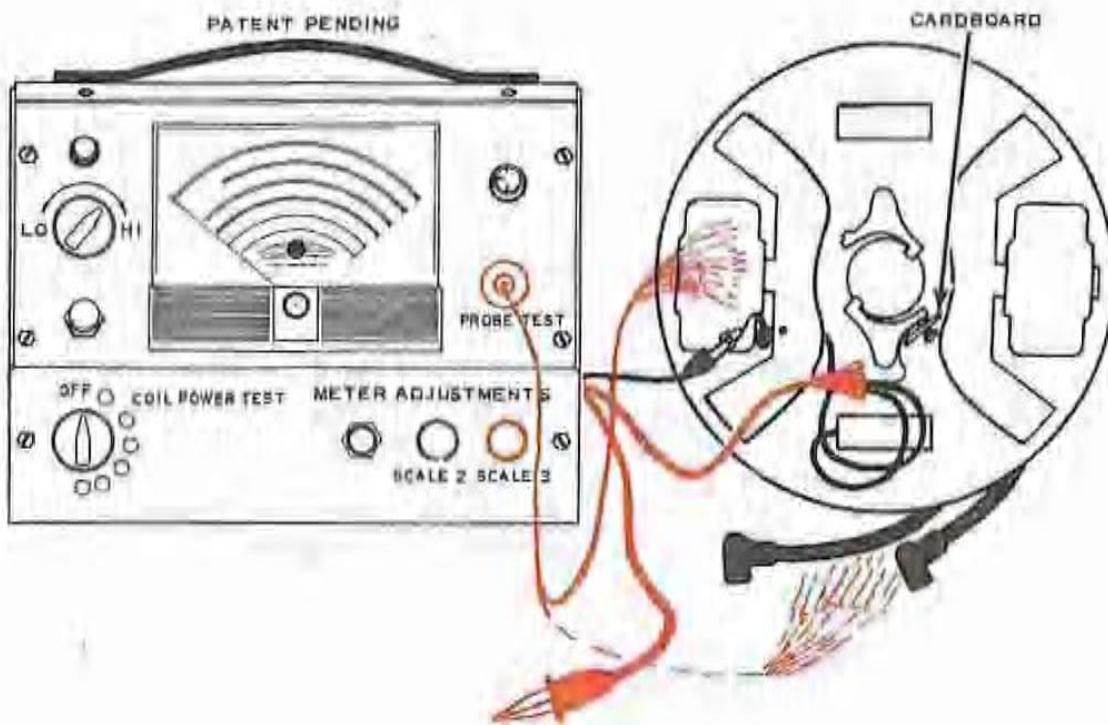


Figure 8

1. Remove single red test lead from coil secondary, (High Tension lead) see illustration Fig. 8.
2. Small red and black test leads stay connected as previously.
3. Plug insulation test prob into "JACK" on front of tester.
4. Turn selector switch to position No. 1.
5. Turn current control knob to "HI" position for maximum current reading on meter. "Do not exceed meter reading."
6. Pass end of insulation test probe over the insulating surface of the coil and spark plug wires.
7. If coil insulation is cracked, leaking or damaged, a spark discharge will be noted at the cracked or leaking surface.
8. Do not permit test probe to linger too long at any point while conducting this test.
9. Completing test as rapidly as possible, as this is a severe test on a coil.

A faint spark occurring around coil insulation during probing is a corona spark and does not illustrate a defective coil.

## COIL CONTINUITY TEST

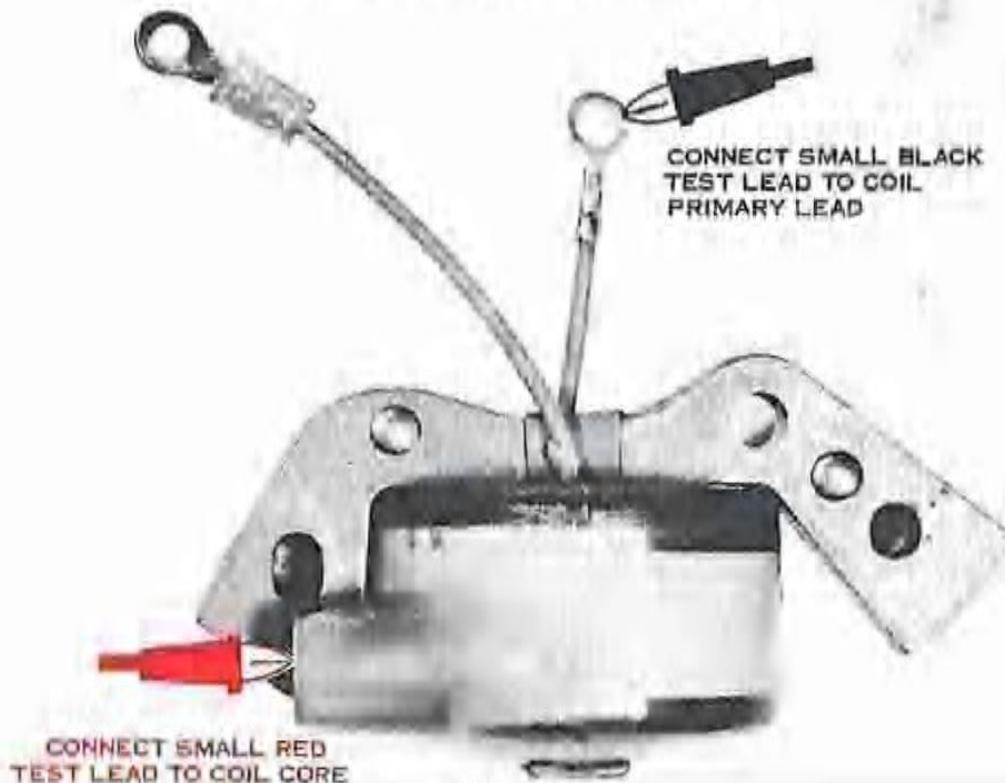


Figure 9

NOTE: Scale 3 has two scales. The upper number is the number shown on Mfg. specifications or are comparative numbers in place of actual ohm resistance "lower numbers." This is an added feature to our later model units starting with Serial No. 4050.

1. Turn selector switch to position No. 3 Coil Continuity.
2. Clip small red and black test lead together.
3. Turn meter adjustment knob for scale No. 3 until meter pointer lines up on set position on right side of scale No. 3.
4. Connect small black test lead to coil ground wire as in previous test.
5. Connect small red test lead to spark plug "high tension" lead.
6. Reading must be between the two values for that particular coil shown in this manual under manufacturer's specifications.
7. Reading of actual resistance in ohms can be obtained by reading lower numbers in same scale.
8. Readings lower than the lowest value under manufacturer's specifications, the secondary winding is shorted.
9. Readings higher than the highest value shown in the specifications, the secondary winding is open.
10. In either case, the coil is defective and must be replaced.

## PRIMARY RESISTANCE TEST

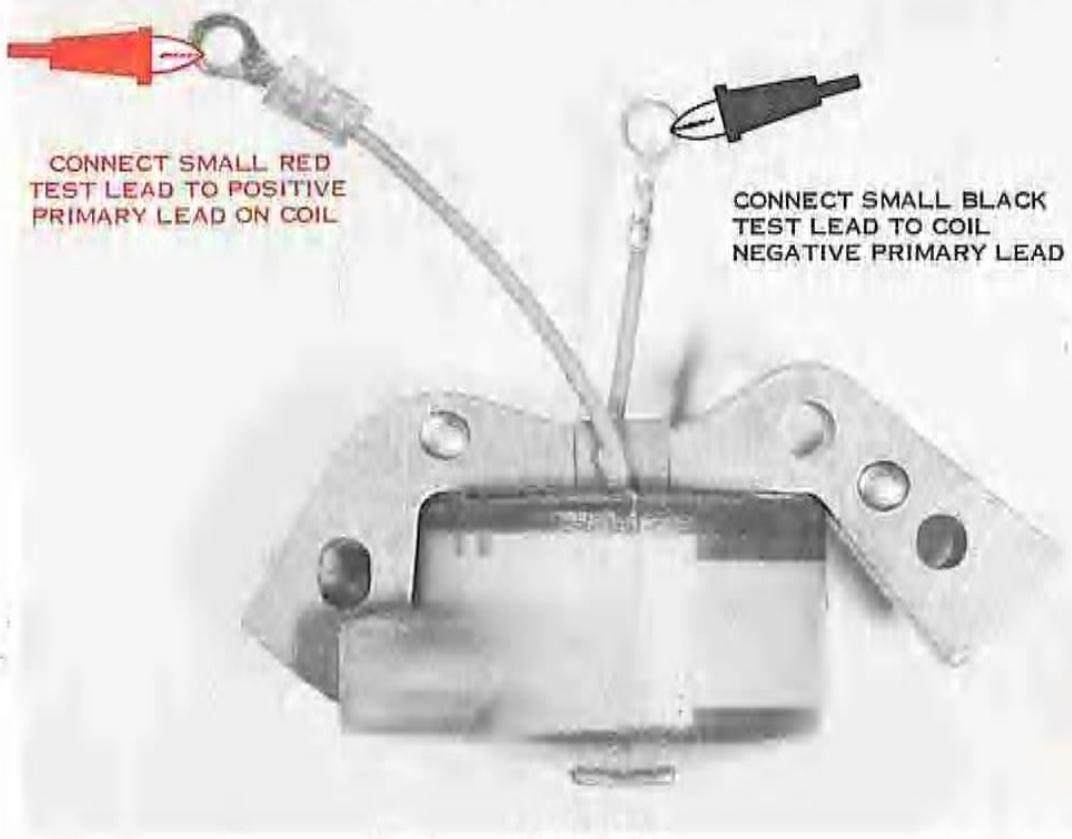


Figure 9A

1. Turn selector switch to position No. 2, Distributor Resistance for checking low OHM resistance values.
2. Do not clip test leads together. Turn meter adjustment knob for scale No. 2 until meter pointer lines up on set position on right side of scale No. 2. Your meter is now set to check all low OHM values from 0 to 30 OHMS.
3. Clip small red test lead to primary Positive side of coil.
4. Connect small black test lead to primary Negative side of coil.
5. Read Red figures on Scale No. 2.
6. Reading must be between the two values for that particular coil shown in this manual under manufacturer's specifications.
7. Resistance in OHMS can be obtained by reading Red numbers in same scale.
8. Readings lower than the lowest value shown in the specifications, indicate the primary winding is shorted.
9. Readings higher than the highest value under manufacturer's specifications, indicate the primary winding is open.
10. In either case, the coil is defective and must be replaced.

Ω

○

○

## COIL GROUND TEST

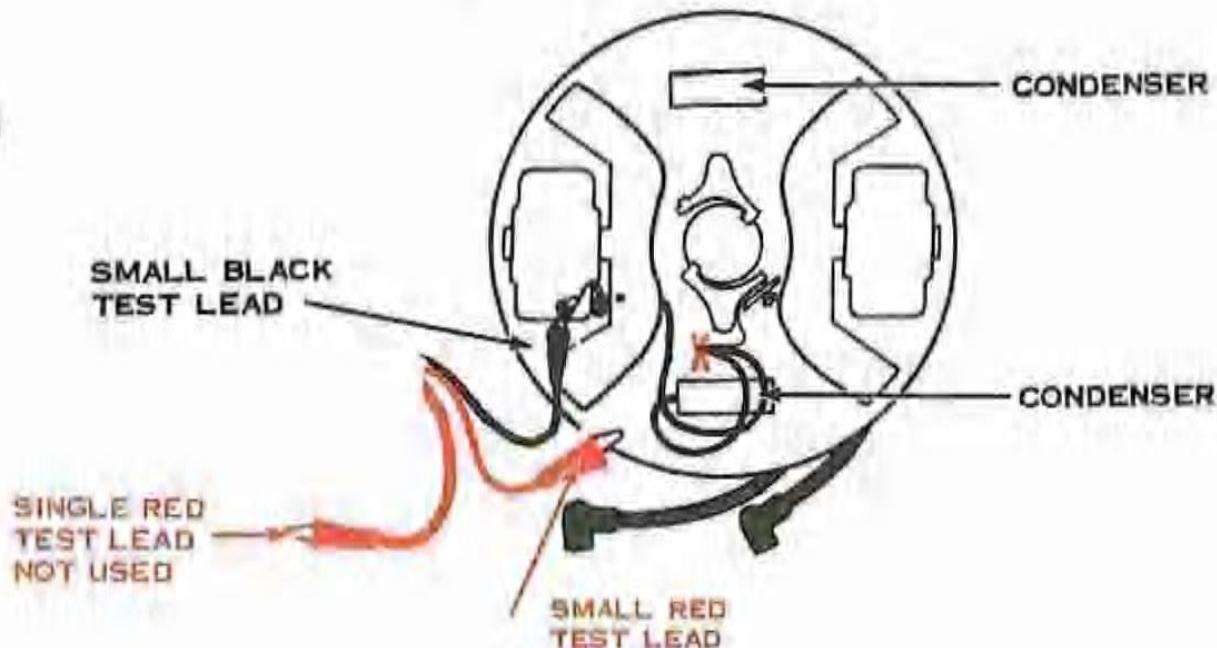


Figure 10

1. Leave small black test lead connected as in Coil Continuity Test.
2. Remove small red test lead from high tension wire and connect it to ground or frame of stator plate. (See wiring hookup, Fig. 10.)
3. Turn selector switch to position No. 3 and read Scale No. 3.
4. The meter pointer hand must be on the "ZERO" line at the left side of the meter.
5. Any meter movement to the right indicates a grounded coil.
6. If there is a meter pointer hand movement to the right, indicating a grounded coil, remove the breaker point terminal screw at "X" on diagram Fig. 10.
7. Remove primary coil wire at this point. If the meter needle remains to the right the trouble is elsewhere.
8. Check condenser for short or grounded breaker points.

NOTE: When coils are permanently grounded to lamination (i.e., Fairbanks-Morse, Bendix-Scintilla), see illustration and similar type Fig. 11, it is not possible to check for ground. This type of coil must indicate a ground (movement of meter pointer hand to full right).

NOTE: When coils are not permanently grounded to lamination, it is possible to check for ground. This type of coil must not indicate any movement of meter pointer hand.

CONNECT SMALL BLACK TEST LEAD TO COIL CORE

CONNECT SMALL RED TEST LEAD TO COIL PRIMARY LEAD

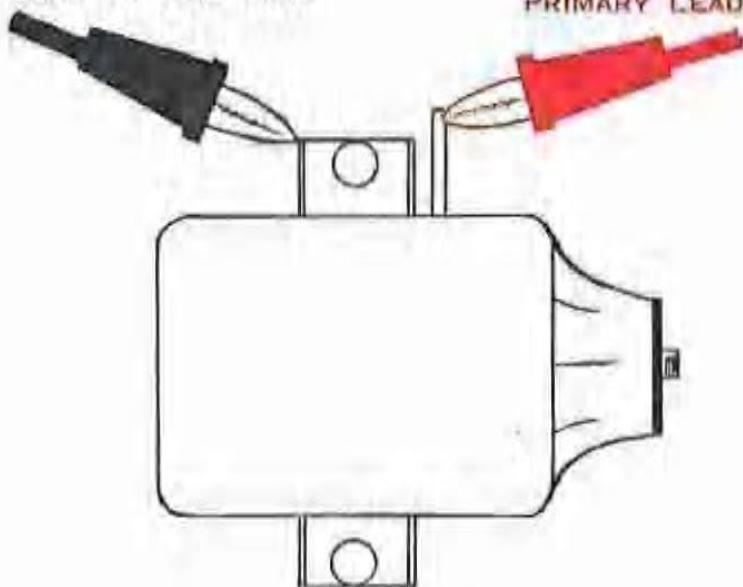


Figure 11

## AUTOMOTIVE TYPE COILS

To test automotive type coils, place small red test lead to positive (+) terminal of coil and small black test lead to ground (-) terminal of coil. Place single red test lead into secondary high tension (plug in terminal) of coil. Follow procedure for testing coils on Pages 5 and 6 and refer to illustration Fig. 13 showing insulation test on automotive coil.

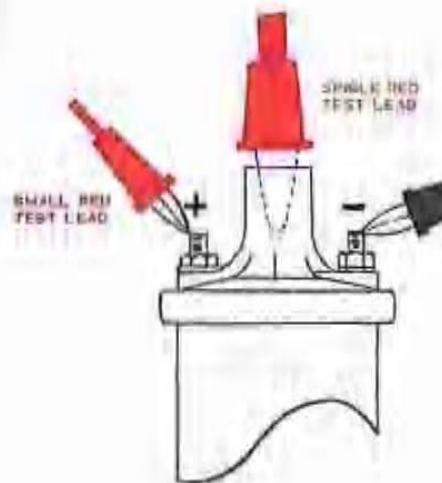


Figure 12



Figure 13

## CONDENSER CAPACITY TEST

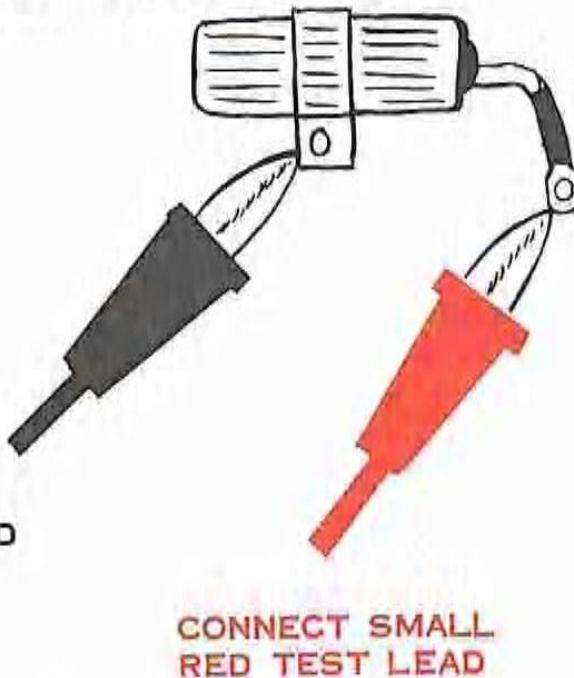


Figure 14

1. To make condenser test, cord must be plugged into 115 volt 60-cycle AC outlet.
2. Leave cardboard between breaker points.
3. Place selector switch on position No. 4, condenser capacity.
4. Clip small red and black test leads together.
5. Depress red button, turn meter adjustment knob on scale 4 to set line on scale No. 4 on right side of meter. (This adjustment is for varying line voltages throughout the country.)
6. Unclip test leads.
7. Connect small red test lead to breaker terminal or if loose to condenser lead.
8. Connect small black test lead to stator plate if condenser is mounted, otherwise to body of condenser. (Depress red button to read Scale 4.)
9. Condenser must be within manufacturer's specification for this particular motor.
10. If not, replace as a condenser that is over or under capacity could cause burnt breaker points.

## CONDENSER LEAKAGE AND SHORT TEST

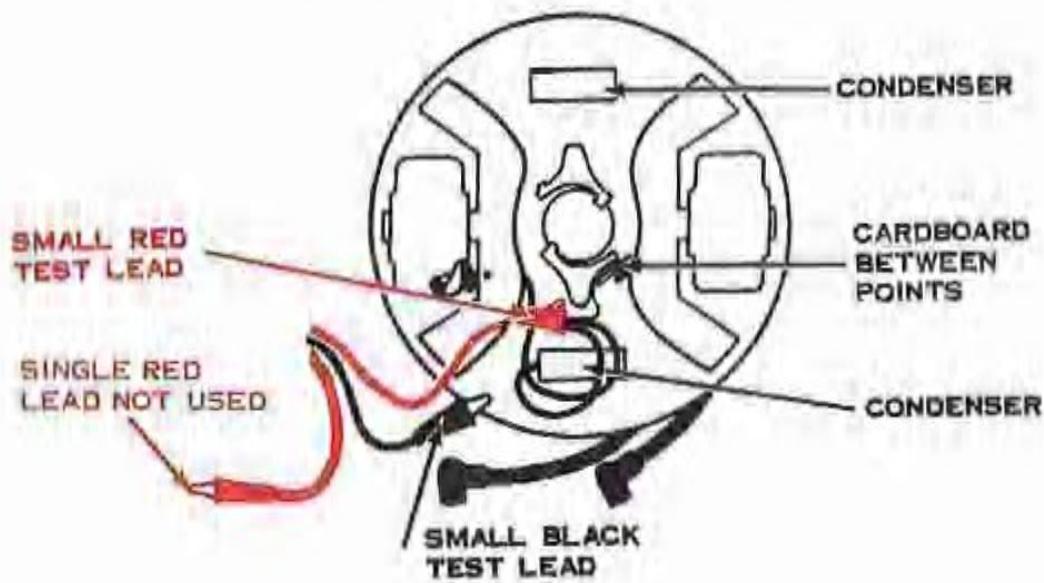


Figure 15

1. Connect small black test lead to stator plate if condenser is mounted, otherwise to body of condenser.
2. Connect small red test lead to breaker terminal, or if unmounted, to condenser lead.
3. Leave cardboard between breaker points.
4. To make condenser test, cord must be plugged into 115 volt 60-cycle AC outlet.
5. After wiring hookup is made, turn selector switch to No. 5 "Leakage" and short.
6. Depress red button and hold a minimum of 15 seconds. Read Scale No. 5.
7. The meter pointer hand will move to the right and must return within range of the narrow black bar at the left.
8. Any readings to the right of the black bar indicate the condenser is leaking or shorted and must be replaced.

NOTE: On Fairbanks-Morse type magnetos or equal, the condenser lead must be removed from the breaker point terminal when testing on a complete magneto. Condenser should be taped against an insulated board while testing to show up loose element.

## CONDENSER SERIES RESISTANCE TEST FOR MODEL 98 USE ONLY

1. Leave cardboard between breaker points.
2. Place selector switch on position No. 6 condenser series resistance.
3. Clip small red and black test lead together.
4. Adjust meter set scale 6 to set line on right side of dial for scale No. 6.
5. Unclip test leads.
6. Connect small red test lead to breaker terminal or if loose to condenser lead.
7. Connect small black test lead to stator plate if condenser is mounted otherwise to body of condenser.
8. Meter pointer must be within ok green block on scale No. 6 on right side of meter.
9. While testing move and "wiggle" the lead coming out of the condenser.
10. Observe meter pointer for any movement.
11. Loose connections can cause trouble if the condenser is subjected to a great deal of vibration.
12. If meter pointer remains within ok green bar on scale No. 6 the condenser is good.
13. If meter pointer moves into the red section on Scale 6 or if by wiggling the condenser lead it moves into red section, then the condenser is defective.
14. This test usually helps to determine the ability of the condenser to readily charge and discharge.

**NOTE:** This test is very sensitive, as the latest techniques are being used for this test.

**DUE TO THE SENSITIVITY OF THIS TEST, MAKE CERTAIN TEST CLIPS AND PARTS THAT TEST CLIPS ARE ATTACHED TO ARE CLEAN OR FALSE READINGS WILL BE OBTAINED.**

## VOLTAGE AND COIL POWER TEST INFORMATION

Use the two small test leads (Red and Black) for checking voltage readings from 0 - 24 volts maximum. Small red lead is positive and black lead is negative.

Scale No. 1 is actually two scales in one. The red scale is for checking voltage. Each red line or division represents 1/2 volt with a maximum reading of 24 volts. Do not attempt to check voltage if selector switch is on any other position than "OFF" except when checking battery in analyzer. Voltage can only be checked when Volts Scale No. 1 switch is in the "ON" position.

THE BLACK SCALE IS FOR CHECKING AMPERAGE DURING THE COIL POWER TEST ONLY. Each black division on the scale represents 1/10 of an amp., with the black 1 representing 1 amp. etc up to maximum of 4 amperes. Amperage during coil power test can only be read when The Volts Scale No. 1 switch is in the "OFF" position.

### NOTE

When voltage switch is in "ON" position, analyzer is inoperative on all other tests. Be sure to place volt switch in "OFF" position for other tests on analyzer. Do not attempt to use volt scale for ammeter readings.

## BREAKER POINT TEST

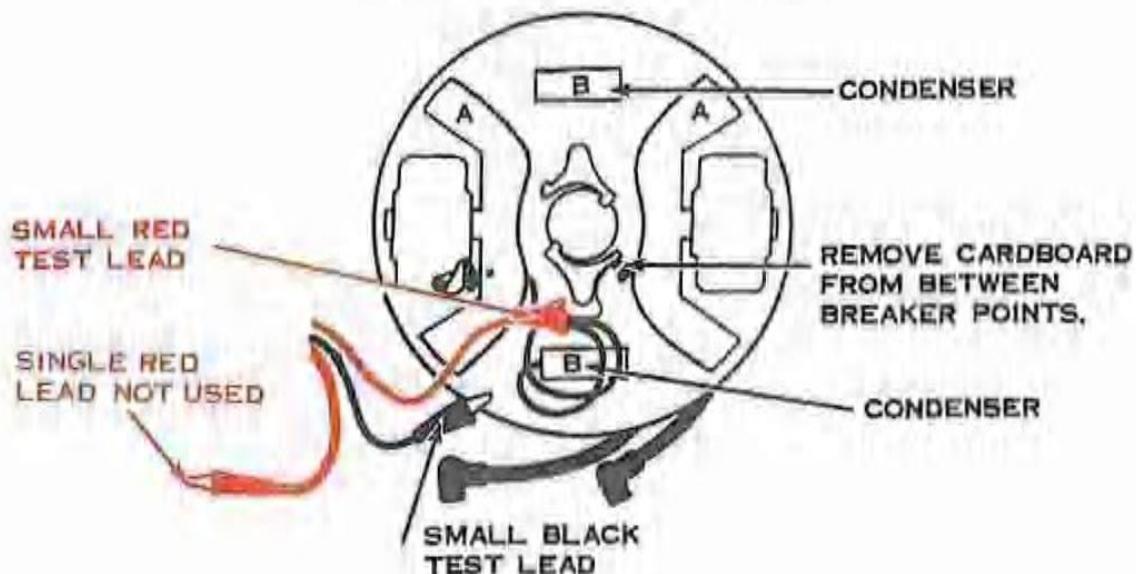


Figure 16

### TESTING FOR HIGH RESISTANCE IN PRIMARY CIRCUIT

1. Turn selector switch to position No. 2 Distributor Resistance.
2. Clip small red and black test leads together.
3. Turn meter adjustment knob for scale No. 2 until meter pointer lines up with set position on left side of "OK" block on scale No. 2.
4. Unclip small red and black test leads.
5. Connect small red test lead to breaker point terminal.
6. Connect small black test lead to stator plate or any part of engine per illustration No. 16.
7. Turn crankshaft until cam allows breaker points to close.
8. The meter pointer must return in the "OK" block.
9. If the meter pointer is in the high resistance band, this indicates that there is foreign matter between breaker points.
10. See note.
11. Breaker assemblies not meeting this test should be replaced.

NOTE: Although breaker points are made of non-corrosive metal a current resisting tough film may form after the engine stands for a period of time, especially if stored in a damp place. This film will cause hard starting of the engine. By running a piece of stiff paper (such as a business card) between the points under tension several times, the film will wear and dirt or oil will be removed from between the breaker points. After cleaning points in the above manner, the meter hand should be in the "OK" block. If not, replace breaker points.

## TO CHECK CONDENSER FOR PROPER GROUNDING

1. Connect small black test lead to stator plate.
2. Connect small red test lead to body of condenser. Point B see illustration Fig. 16.
3. Read Scale No. 2.
4. The meter pointer must be in the "OK" band.
5. If meter pointer reads in the high resistance band this indicates that the condenser is not properly grounded to plate.
6. Check points in the same manner.

## TIMING

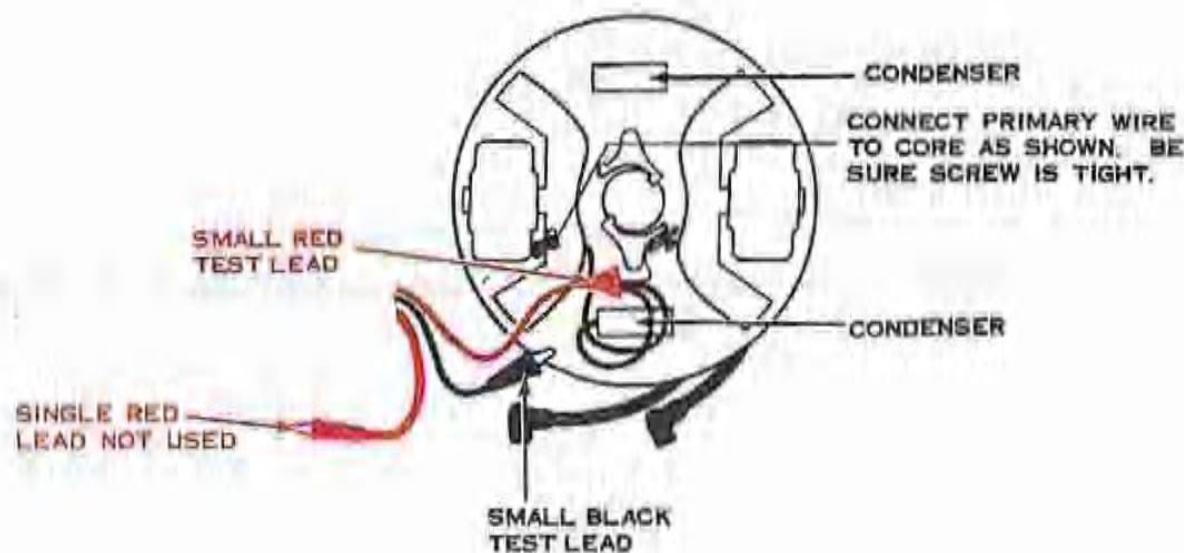


Figure 17

### BEFORE TIMING

Preliminary to timing motor, set the breaker points to the manufacturer's specifications. Use a feeler gauge - don't guess. Be sure the breaker rubbing block is on the highest part of the cam when setting points. (Refer to "Breaker Point Test", preceding.) Lubricate the cam oiler wick of the breaker arm with fibre grease (as specified by manufacturers). Be sure the moveable arm is free on pun and lubricate pivot pin with fibre grease. Be sure all screws are tight and that all wires are in their proper place.

### TIMING

1. Remove paper from between breaker points and clean points before test. DO NOT FILE.
2. Connect small black test lead to the stator plate frame.
3. Connect small red lead to the breaker point terminal screw.

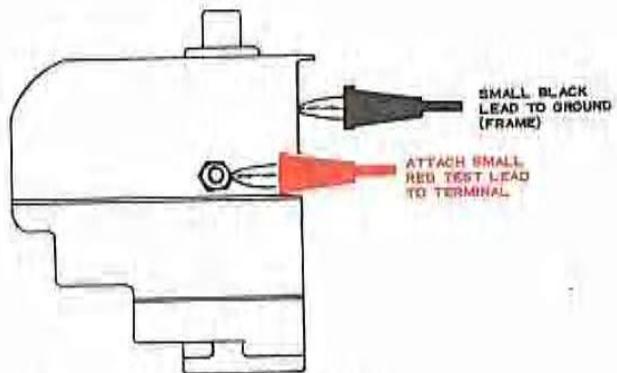


Figure 18

"See your manufacturer's service manual for the particular motor specification relative to piston movement with timing of magneto." Set this first.

Again, be certain that the breaker points are making perfect contact. Refer to "High Resistance Test in Primary Circuit", preceding. After wiring hookup is made, as shown in illustration preceding, turn selector switch to position No. 2, "Distributor Resistance", and read Scale No. 2. Rotate magneto or distributor in the advance direction. It will be noted, when points are closed, that the meter pointer hand will be in the "OK" block. The moment that the breaker points start to open, the meter pointer hand will move into the high resistance band. In this manner, the timing can be set in relation to movement of the piston.

On magnetos, such as Fairbanks-Morse or Kiekhaefer type, connect the small red test lead to the exposed primary ground terminal and the black lead to the frame or ground. See Fig. 18.

## ARMATURE GROUND TEST

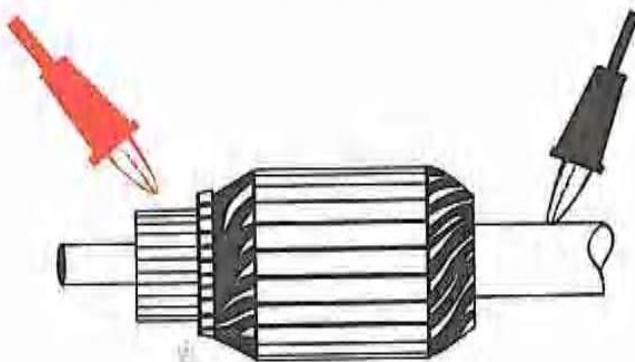


Figure 19

Turn selector switch to position No. 3, "Coil Continuity". Attach small black test lead to armature shaft, as shown in illustration above, and use small red test lead to probe the commutator copper divisions. If the pointer hand moves across the meter to the right, as the divisions are contacted, the armature is grounded and must be replaced or commutator must be cut down and mica must be undercut. Meter pointer hand should not move during this test.

## SPARK TEST



Figure 20

With the selector switch in "OFF" position, disconnect the high tension lead from the spark plug and clip single red test lead to spark plug lead. Place test probe into red jack and attach opposite end to cylinder block to form ground. Crank engine over and view spark jump through tester's small window. If no spark, indications are that some part of the magneto is defective or lead wire is broken. Repeat process for each spark plug lead wire.

**NOTE: IF SELECTOR SWITCH IS IN ANY OTHER POSITION,  
DAMAGE TO METER WILL RESULT.**

## STARTER SOLENOID TEST

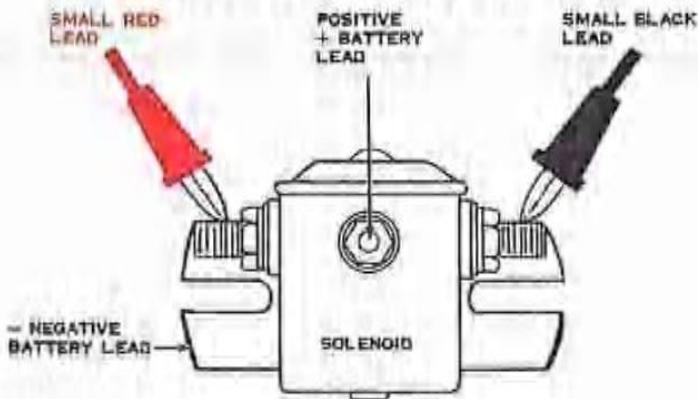


Figure 21

1. Turn selector switch to position No. 3, "Coil Continuity".
2. Connect small red test lead to one large terminal of solenoid, as shown in illustration above.
3. Connect small black test lead to other large terminal of solenoid.
4. With a battery of the capacity of the solenoid (6 or 12 volts), place two jumper leads on battery terminals.
5. Connect positive lead to small terminal of solenoid.
6. Connect negative lead to case or bracket of solenoid for ground.

**NOTE:** On solenoids with two small terminals, one is a ground and one an energized terminal.

7. Meter pointer hand must move fully to right of meter.
8. If no movement or only partial movement is indicated, the solenoid is defective and must be replaced.

**CAUTION: DO NOT CONNECT BATTERY LEADS TO LARGE TERMINALS OF SOLENOID OR METER WILL BE DAMAGED.**

## CONTINUITY TEST



Figure 22

To test ignition or electrical wires and harness or parts for "open circuits", turn selector switch to position No. 3, "**Coil Continuity**". Zero out meter. Connect small black test lead to one end of wire and **small red test lead** to opposite end of same wire, as shown in illustration above. Meter pointer hand must move fully to the right of meter. If meter pointer hand stays at left, this indicates a broken wire. Move lead wire back and forth while making test.

## RESISTANCE TEST

To check an electrical harness and wire terminals to determine if the part is OK, place selector switch on Scale No. 2, "**Distributor Resistance**". Attach **small red test lead** to terminal of one end of lead and **small black test lead** to other end. Meter pointer needle must return to "OK" block. If needle favors right side **away from "OK" band** it indicates a defective connection inducing a resistance. Repair connection or replace part.

## RESISTOR TEST

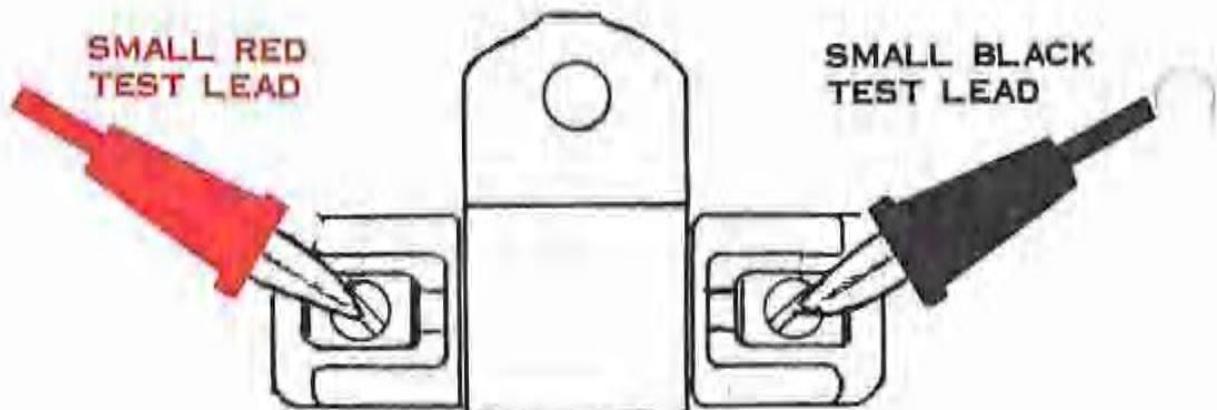


Figure 23

Use scale No. 3 for checking low OHM resistance values. Set selector switch on No. 2, "Distributor Resistance", position. Do not clip test leads together. Turn No. 2 scale meter adjustment knob to adjust meter needle with red line on right side of Scale No. 2. Your meter is now set to check all low OHM values from 0 to 30 OHMS. Clip small red and black test leads to terminals of resistor, as shown in illustration above, and read red figures on Scale No. 2. Replace resistor not meeting the manufacturer's specifications.

Manufacturer	Part No.	Resistance Reading	
		Min.	Max.
Kiekhaefer Mercury	393-1286	1.3	1.7
Kiekhaefer Mercury	393-1482	2.0	2.4
Kiekhaefer Mercury	393-1572	3.0	3.4
McCulloch (Scott)	332-196	1.7	1.9

## HIGH TENSION LEAKAGE - CRACK TEST

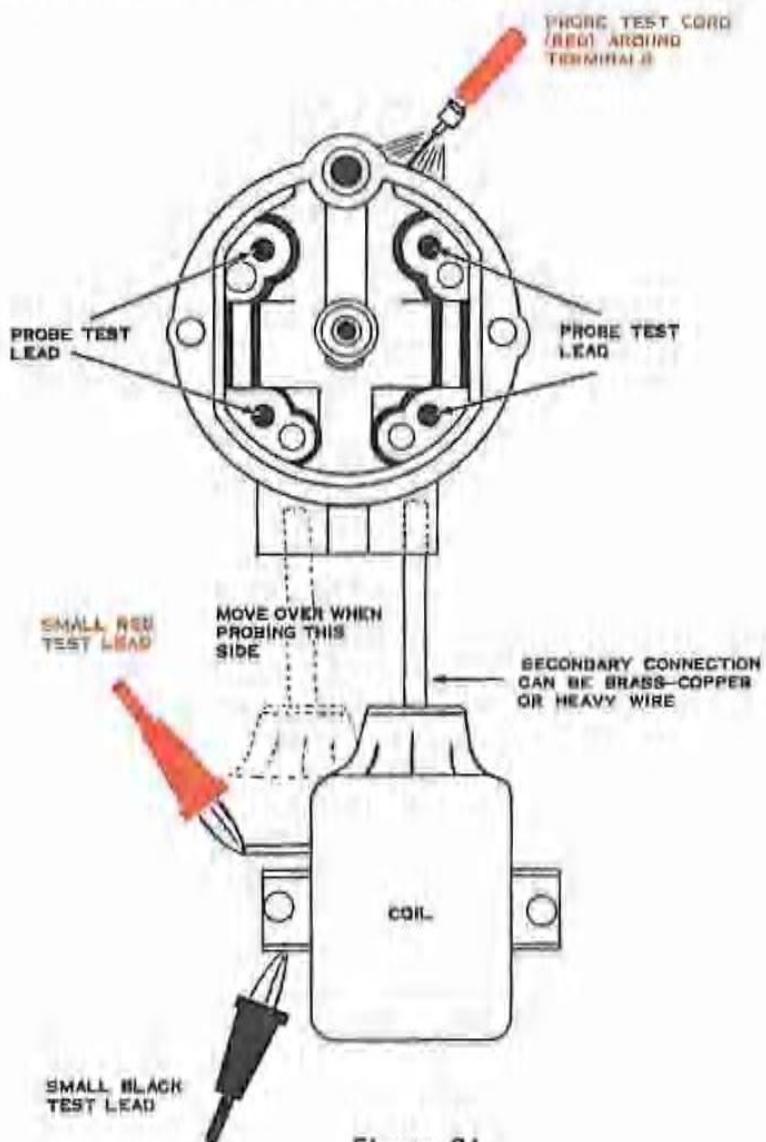


Figure 24

To check for cracks or leakage paths in ignition distributor caps or distributor rotors, clip small red test lead to coil primary lead and black test lead to coil core, as shown in illustration above. A used coil is best for this test, since the coil will be used for inducing a high secondary voltage. The secondary coil terminal must have a brass or copper lead attached so that it will extend fully into the distributor cap spark plug lead wire outlet to provide the spark for this test. Turn selector switch to position No. 1, "Coil Power Test", and turn "LO-HI" current control knob to the "HI" position. Place test probe into jack in tester and pass other end of test probe over area around distributor contact post. If there is a crack or leakage path, it will show up by the spark following a path in the cap rather than sparking directly to the correct terminal. If the spark path occurs, the cap is defective and must be replaced. There should be no spark jump to any other distributor post other than the one being tested. Repeat procedure on each contact post of distributor cap.

## DISTRIBUTOR ROTOR TEST

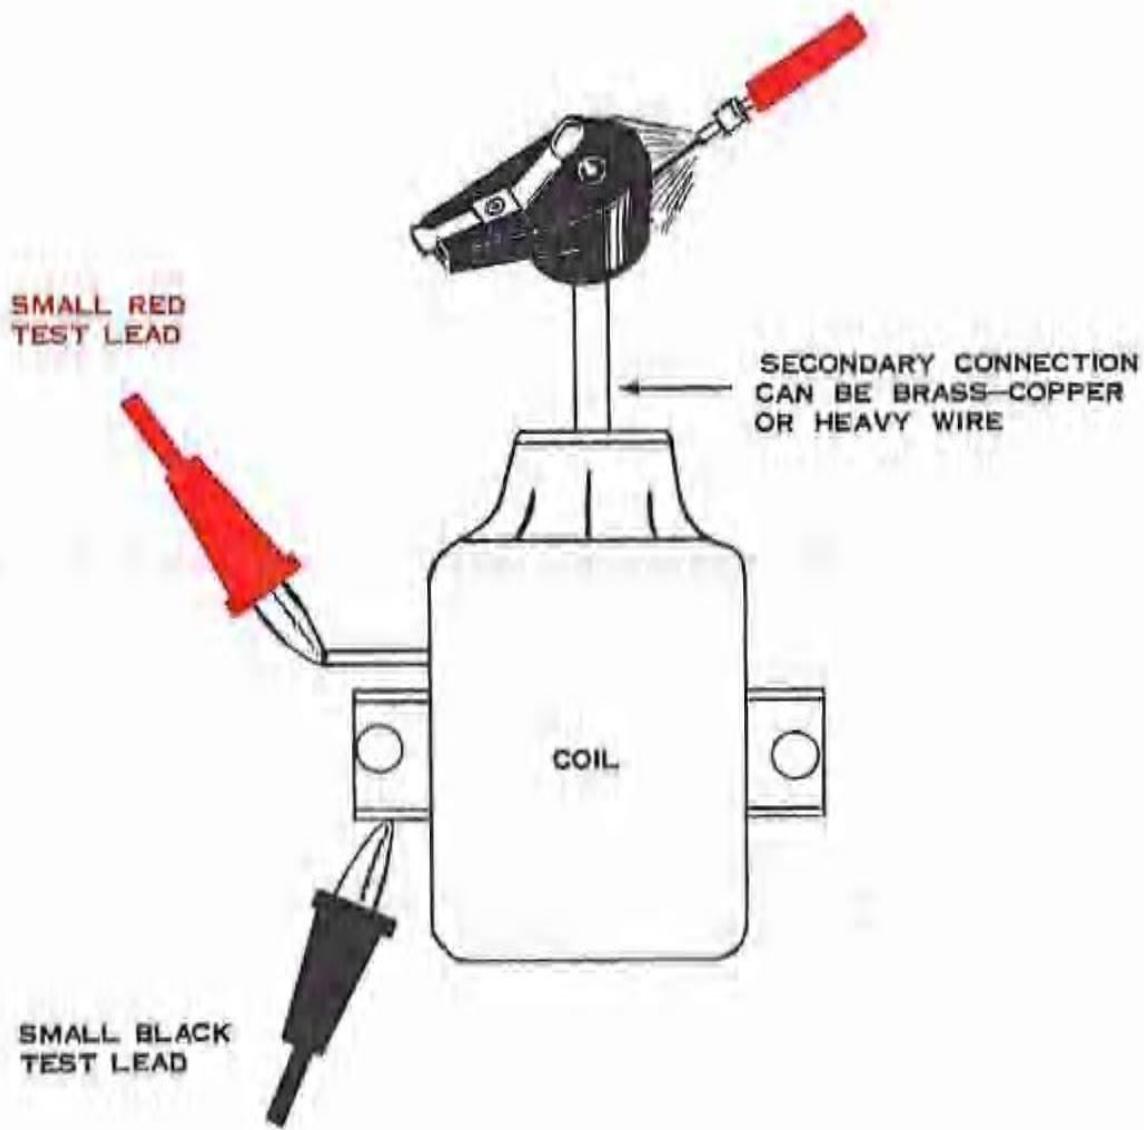


Figure 25

Follow distributor cap leakage test procedure, preceding. Place distributor rotor on high tension terminal of coil so that rotor shaft hole rests on coil terminal as shown in Figure 25. Search around distributor rotor with ground test probe. There should be no spark jump at any point. If a heavy spark does occur, it indicates a defective distributor rotor. Replace defective part.

## TESTING COILS WITH TWO SECONDARIES

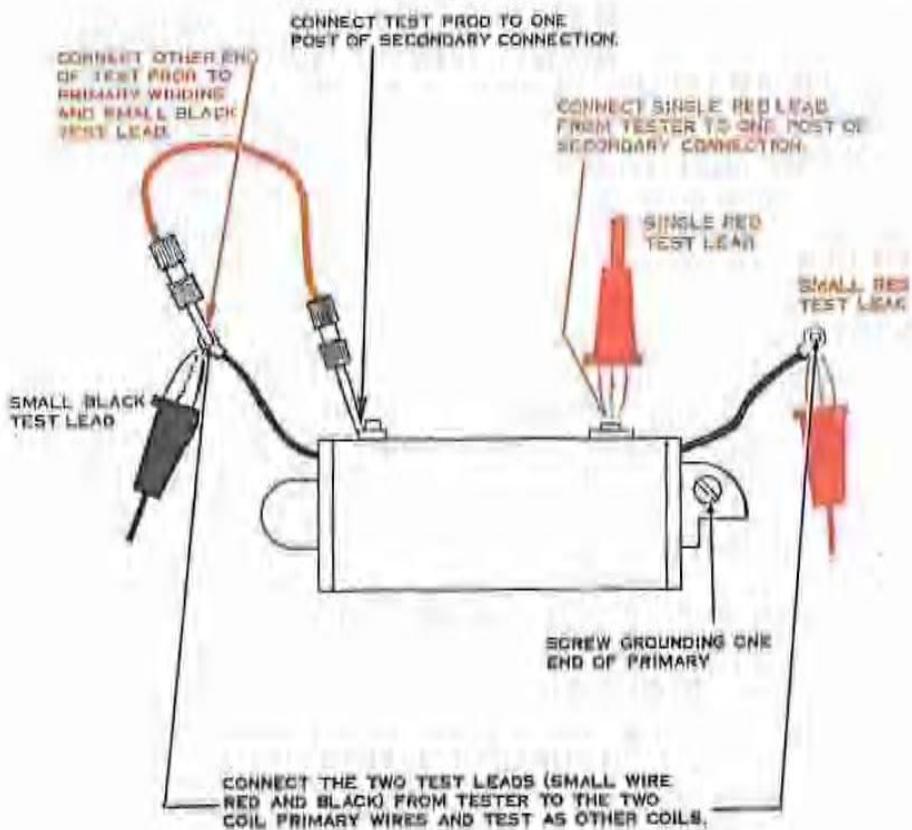


Figure 26

## TESTING CONVENTIONAL TYPE MAGNETO

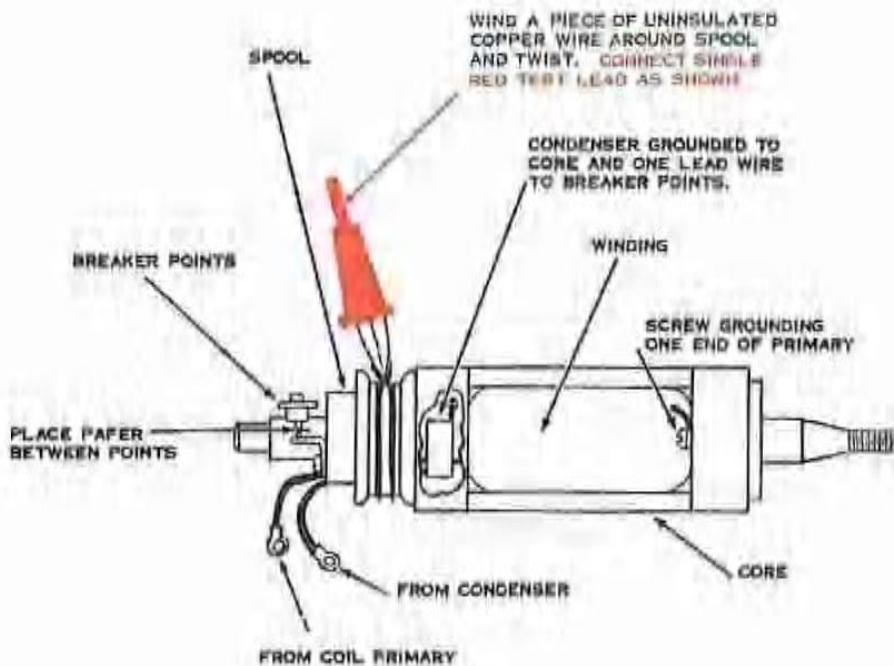


Figure 27

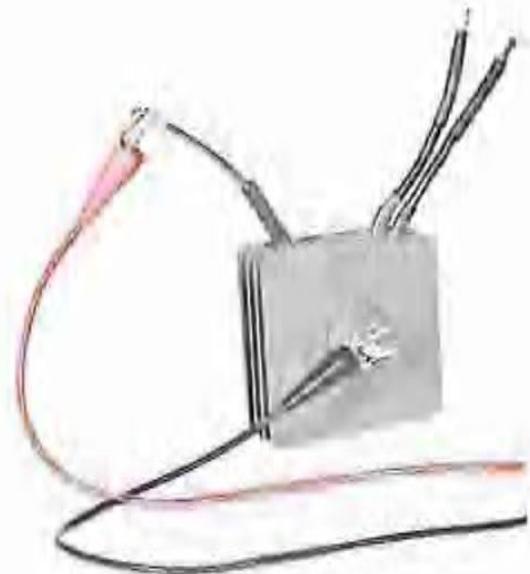


Figure 28

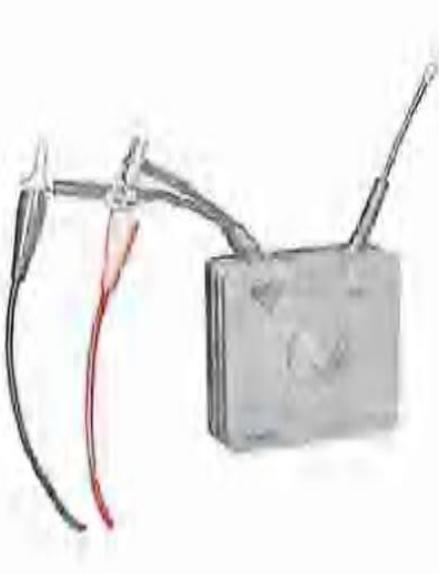


Figure 29

## TESTING SELENIUM RECTIFIERS

BY MEASURING DIRECT CURRENT RESISTANCE

1. Set selector switch on position No. 3, "Continuity".
2. Clip **small red** and black test leads together and turn meter adjustment knob for Scale No. 3 until meter pointer lines up on set position on Scale No. 3, right side.
3. Connect **small red test lead** to positive lead on rectifiers. Figure 28.
4. Connect **small black test lead** to ground stud or lead on rectifier. Figure 28.
5. Note reading of figures on **lower band**, Scale No. 3.
6. Reverse test leads on rectifier and note readings again.
7. Ratio of two readings should be 10:1 or greater.
8. Remove analyzer test leads and connect to the two alternator leads or lead terminals on rectifier. Figure 29.
9. Note reading of figures on **lower band**, Scale No. 3.
10. Reverse test leads on rectifier and note readings again.
11. The ratio of the two readings should be no more than 2:1.
12. This is only a preliminary test to determine condition of rectifier. If questionable, as a final test, rectifier should be installed on engine and checked with ammeter while engine is running.

NOTE: This is a true ohm scale, 0 - 200,000 ohms and can be used to test ohm resistance of other electrical components.


## FIELD WINDING GROUND TEST



### STARTER MOTOR DISASSEMBLED

1. Turn selector switch to position No. 3, "Coil Continuity".
2. Attach small red test lead to insulated terminal on outside of starter motor and small black test lead to starter motor frame.
3. Meter hand should not move, if it does, it indicates the field is grounded.
4. On starter motors having two fields 1) forward winding 2) reverse windings, test both insulated terminals.

## GROUND BRUSH TEST

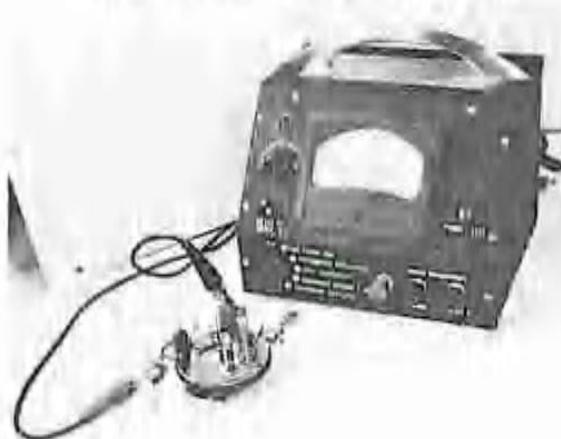

### STARTER MOTOR DISASSEMBLED

1. Turn selector switch to No. 3, "Coil Continuity".
2. Attach small black test lead to the grounded brush and small red test lead to frame to which brush is fastened. (End cap housing or field frame.)
3. Meter hand must move to the right, if not, there is a poor ground connection.
  - a) replace the ground brush and lead or
  - b) check that the lead connection is secure to the frame.
4. There is also a possibility of the brush holder having a poor ground to the frame or end cap, test by following steps 1, 2, 3 above.

## GROUNDED ARMATURE OR FIELD WINDING



### STARTER MOTOR ASSEMBLED

1. Raise ground brushes from commutator and insulate them from commutator with cardboard. Make sure brush is not touching commutator.
2. Turn selector switch to position No. 3, "Coil Continuity".
3. Attach small red test lead to insulated terminal on outside of starter motor and small black test lead to starter motor frame.
4. On starter motors having two fields 1) forward winding 2) reverse windings, test both insulated terminals. While making test move brush lead, making sure there is a solid connection.
5. If analyzer shows continuity (meter hand moves to the right) there is a ground, check individually (a) and (b) below:
  - a) Check armature - Page 17 Armature Ground Test.
  - b) Check Field Winding separately - Page 25 Field Winding Ground Test.

# **SERVICE SECTION**

**FOR**

---

**EVINRUDE - JOHNSON**

---

**UNI-CHARGER**

**or**

**AC GENERATOR  
-ALTERNATOR**

□

○

○

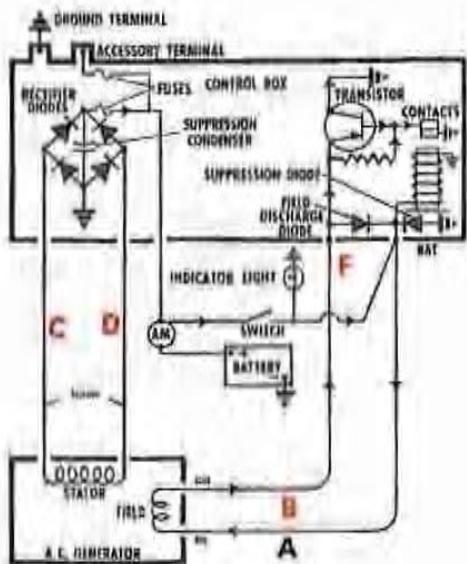


Figure 30

## TESTING FOR FAULTY WIRING

1. A short between two wires, or a grounded wire, or high resistance connections can cause the charging circuit to operate improperly.
  - A. If the lead from the field winding to the "F" terminal of the regulator (marked "B" in the wiring diagram Fig. 30) should become grounded. Battery will be charged excessively.
  - B. If a high resistance should develop at the "BAT" terminals and the wires connected to the "BAT" terminal at regulator. Ammeter will show an excessively high rate of charge, causing battery to use an abnormal amount of water.
  - C. A short circuit between leads from the stator winding to the rectifier (wires marked "C" and "D", Fig. 30) or from these becoming grounded. Ammeter will show a discharge and an undercharged battery would result,
2. It is important that wiring be checked visually for damage due to corrosion, frayed insulation and loose connections.
3. Additional checks are covered in the following sections.

### TESTING FOR SHORTED OR OPEN RECTIFIER DIODES, OR A SHORTED SUPPRESSION CONDENSER (CAPACITOR)

1. Before checking diodes for shorts or opens, disconnect battery leads, the large nylon connector, the condenser lead, the four diode leads from the harness and remove both fuses.
2. To check the condenser for capacity and shorts, refer to page 11 and 12, Fig. 14. Also top of page 16 for proper grounding.
3. Condenser capacity is approximately .2 microfarads.

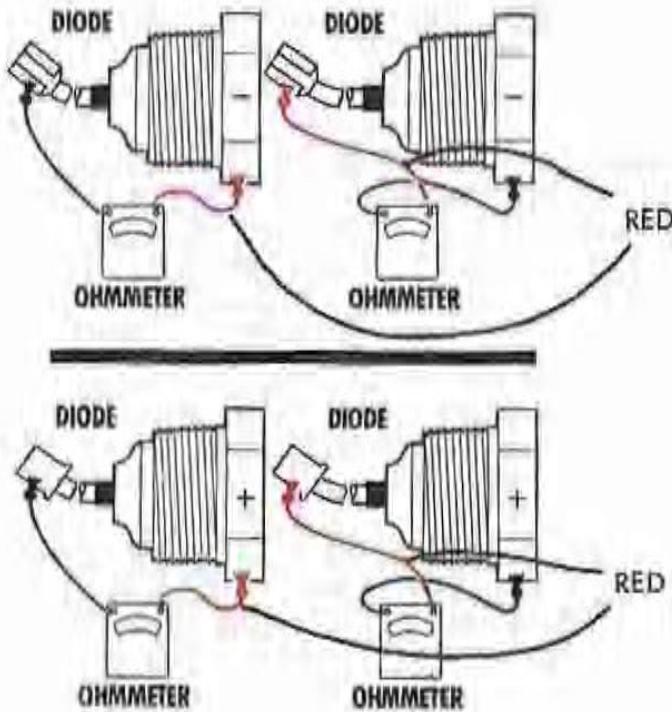


Figure 31

## TESTING DIODES

1. To test diodes for shorts and opens, each diode must be checked twice.
2. These two checks are accomplished by reversing the polarity such as the negative and positive.
3. This test can be made on your Merc-O-Tronic Analyzer. (Black lead-, small Red lead-)
4. By placing selector switch on position No. 3 Coil Continuity (See page 8, paragraph 1, 2, and 3) and by reading the lower red figure on meter scale No. 3.
5. Connect small test leads as shown in Fig. 31 between the center post and the base.
6. A zero reading in both tests as outlined above indicates the diode is shorted.
7. A normal diode will show a high reading in one direction and a low reading in the opposite direction.
8. An infinite (Very High) reading in both tests indicates the diode being tested is open.
9. Before replacing a diode, coat the diode threads with silicone grease or light engine oil, and then tighten to 150-180 inch-pounds of torque.

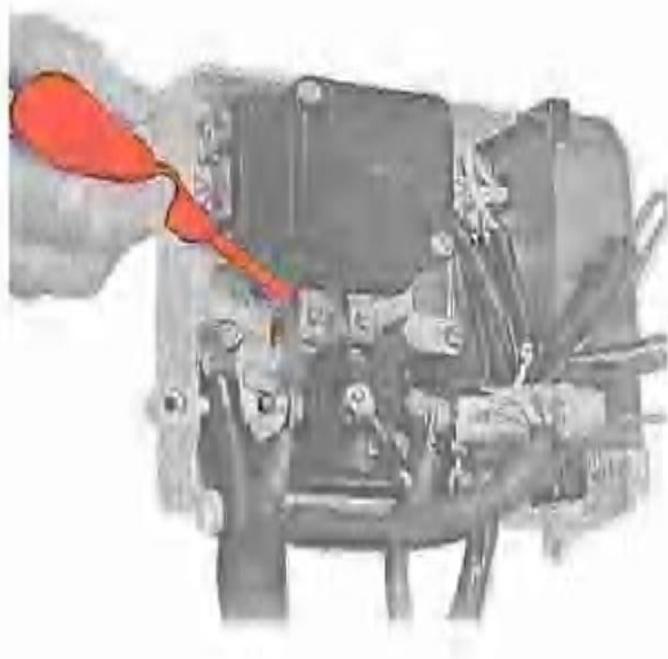


Figure 32

## TESTING OUTPUT OF AC GENERATOR OR UNI-CHARGER

1. The AC generator can be checked for output by shorting between the regulator "F" terminal and ground with a screwdriver. (Fig. 32).
  - A. Operate engine slightly above idle speed, (1500 RPM) and note the reading on the ammeter.
  - B. All accessories must be turned off when this check is made.
  - C. If output is increased (note ammeter reading) the AC generator, uni-charger, or rectifier is not at fault.
  - D. The trouble is probably due to an improper regulator voltage setting or a defective regulator.
  - E. In this case, proceed to the section entitled "Checking Regulator Voltage Setting."
2. If no output is obtained, the AC generator or uni-charger is defective.
3. Both the field winding and the stator winding should be checked with the ohmmeter on the Merc-O-Tronic Analyzer scale No. 2 or 3 as required.

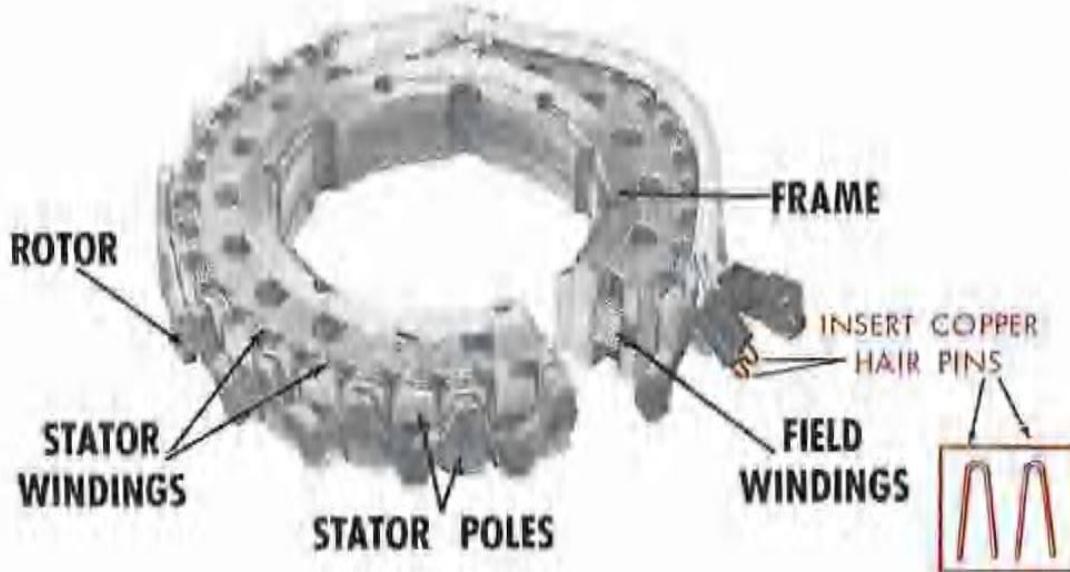


Figure 33

## TESTING FIELD WINDINGS

1. To test the field winding, separate the field winding connector (the one with the red and blue leads) from the wiring harness.
2. Take two pieces of bare copper wire (20 GA) about 2" long and shape into hairpins. See illustration above.
3. Place in each female connector making contact with each terminal, see Fig. 33.
4. This will allow you to make field winding test without any difficulty.
  - A. Turn selector switch to position No. 2 do not clip small test leads together.
  - B. Adjust meter knob scale No. 2 so meter pointer will line up on red set line on right side of meter.
5. After zeroing in meter pointer attach one small lead to either hairpin connector and the other small lead to the lamination or stator.
6. The reading should be infinite if the field winding is not grounded.
7. When testing for shorted or open field windings leave the two copper hairpins in position as in Fig. 33.
8. Connect the other small test lead to the other hairpin and leave selector switch on position No. 2, read scale No. 2.
9. The readings should be 1.2 - 3.2 ohms or (1.9 - 2.2 ohms at 80° F).
10. A lower reading indicates a shorted winding.
11. An infinite reading indicates winding is open.
12. In either case the field winding is defective.

## TESTING THE STATOR WINDING

1. Adjust analyzer for the following tests procedure.
  - A. Place selector switch on position No. 2.
  - B. Adjust meter, knob for scale No. 2 until meter pointer lines up on set position on right side of Scale No. 2.
2. Separate the Stator Winding Connector (the one with the two yellow leads) from the harness.
3. Take one small test lead and attach to one of the copper contacts in the harness connector.
4. The other small test lead attach to the core.
5. Read meter scale No. 2, reading should be infinite.
6. Any meter pointer movement indicates the winding is partially grounded.
7. If meter pointer moves to the left, this indicates winding is grounded or defective.
8. If meter pointer does not move at all remove small test lead connected to the core and attach to the other copper contact in the harness connector.
9. Leave selector switch on position No. 2.
10. Read meter scale No. 2 (which is the low resistance value scale).
11. Winding should show a reading of minimum .3 - maximum .3.
12. If meter pointer moves only a part of the way, this indicates a poor connection or a partial open.
13. If meter pointer does not move at all or there is an infinite reading this indicates winding is open.
14. In either case the winding is defective and stator assembly should be replaced, or defect located and repaired.
15. Internally shorted stator windings are difficult to test due to the very low resistance of the windings.
16. If all the generator and rectifier checks are satisfactory but the output is low, an internally shorted stator winding (which in some cases do not show up on the meter) could be the cause.

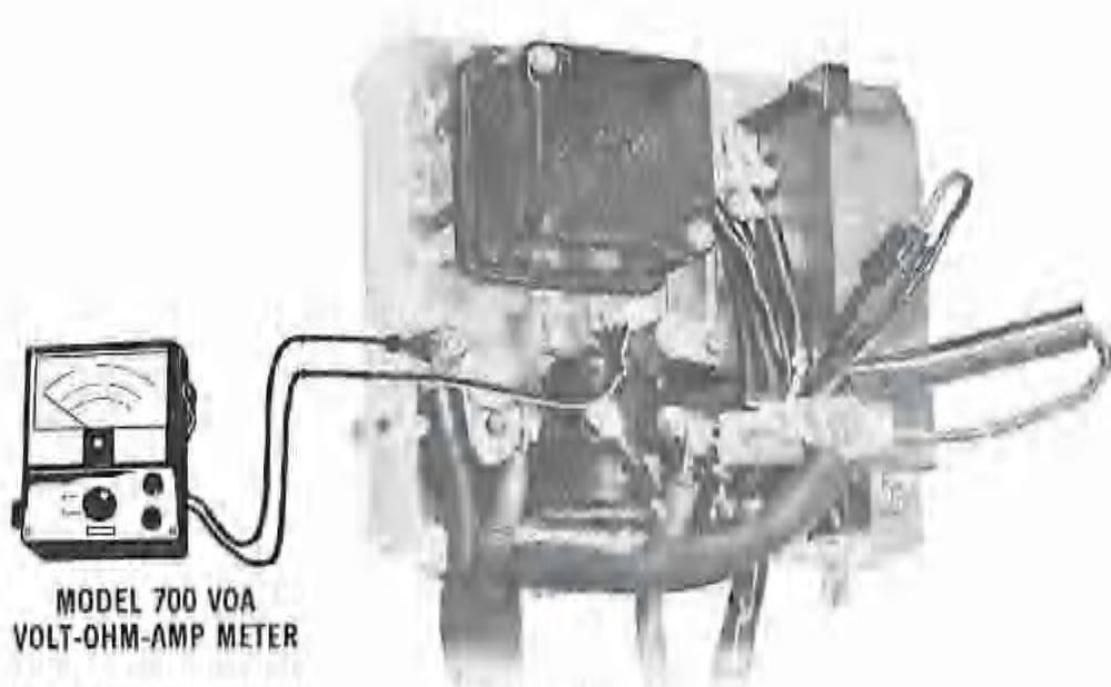


Figure 35

## INCORRECT REGULATOR VOLTAGE SETTING

**CAUTION:** Do not short across any of the terminals in the junction box.

1. To check the voltage setting reconnect all connections and then connect the positive Merc-O-Tronic Model 700 VOA voltmeter lead to the regulator "BAT" terminal and the negative lead to ground. (Fig. 35).
2. Turn on the switch but do not start the engine.
3. The Model 700 VOA voltmeter reads battery voltage.
4. A zero reading indicates an open in the circuit between the regulator and the battery. If green "on light" lights up on the dash the open circuit would be between the key switch and regulator. If ignition coil had current the open would be from the red wire to the field to regulator.
5. Operate the engine at 1500 rpm for 20 minutes with the cover on the regulator and all accessories turned off to bring the regulator to operating temperature.

For accurate RPM readings use the Merc-O-Tronic Electronic Service Tachometer.

6. Turn off the ignition switch to stop the engine.
7. Restart the engine, operate it at 1500 rpm and note the voltage setting.
8. The dash ammeter must show a charge of not over 10 amperes at the time the voltage setting is read.

A fully charged battery must be used to adjust regulator.

9. If the voltage setting is 15 volts or above, the charge rate may continue above 10 amperes after the 20-minute warm-up period.
10. In this case the voltage setting needs to be reduced.
11. If the voltage setting is below 15 volts but the charge rate remains above 10 amperes, continue to charge the battery until the charge rate drops to below 10 amperes before reading the voltage setting.
12. The voltage setting should be 14.4 to 15.0 volts at ambient temperature. Ambient temperature is the temperature of the air surrounding the regulator 1/4 inch from the cover.

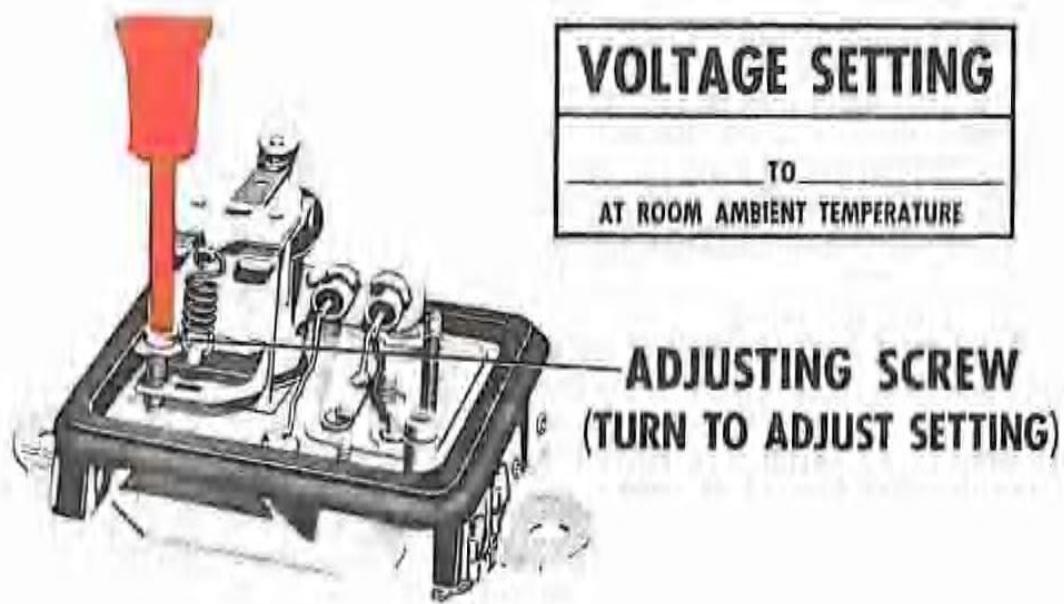


Figure 36

### ADJUSTING VOLTAGE SETTING

1. To adjust the voltage setting, remove the regulator cover and turn the voltage adjusting screw located on the back of the voltage unit, (Fig. 36).
2. This should be done after the 30-minute warm-up period with the engine operating at 1500 rpm.
3. Turning the screw clockwise will raise the setting, and counter-clockwise will lower the setting.

**CAUTION:** Always make final setting by turning the screw clockwise. This insures that the springholder will be against the head of the screw. Therefore, turn the screw counterclockwise farther than necessary to make the adjustment. Then turn the screw clockwise to make final setting. Replace the regulator cover.

4. After making the setting, turn off the switch and stop the engine.
5. Restart the engine and operate it at 1500 rpm and note voltage setting.
6. Readjust if necessary.
7. Always stop and restart the engine before reading the final voltage setting.
8. Always make final voltage checks with the regulator cover in place.
9. If the setting cannot be adjusted to the desired value, the regulator is defective internally.

## **TAILORING REGULATOR VOLTAGE SETTING**

1. Unusual operating conditions may make it necessary to "tailor" the voltage setting to avoid battery overcharge or undercharge.
2. If the engine is operated consistently at low speeds with accessories turned on, the battery may become discharged even though the units in the charging circuit are functioning satisfactorily.
3. Raising the voltage setting to a value within the specified limits may correct the condition.
4. If increasing the setting does not correct the trouble, it is likely that the accessory load is too great for the generator output at that particular speed.
5. Similarly, consistent operation at moderate or high speeds with light electrical loads may result in excessive battery water usage denoting battery overcharge.
6. This is especially true under hot weather conditions.
7. A lower voltage setting in this case may be required.
8. If changing the setting by .3 volt does not correct the condition, the setting should be changed an additional .3 volt and then a check made for an improved battery condition.

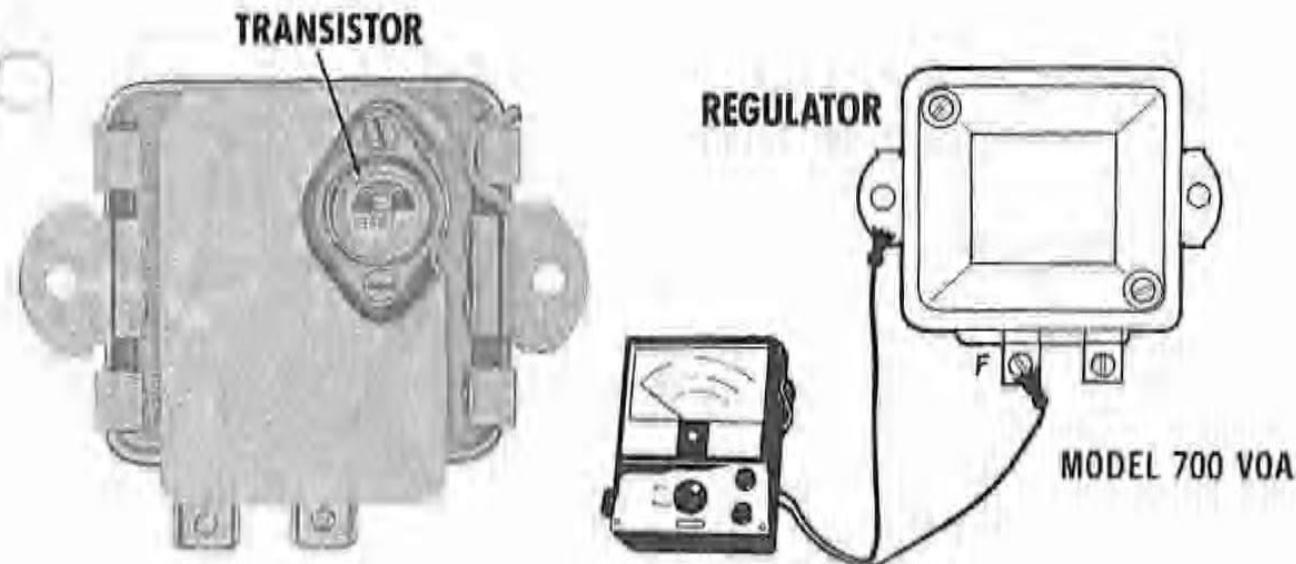


Figure 37

## INTERNAL REGULATOR CHECKS


The components inside the regulator may be checked with the regulator connected in the circuit as shown in Figure 30.

### TRANSISTOR

1. To check the transistor, connect the Model 700 VOA voltmeter from the regulator "F" terminal to ground (Fig. 37).
2. Close the switch without starting the engine, and note the Model 700 VOA voltmeter reading.
3. A reading of approximately 1 to 2 volts is normal.
4. If the reading is zero volts, the transistor is shorted.
5. An intermittent short between the leads from the field winding to the regulator (marked "A" and "B" on the wiring diagram, Fig. 30), an open regulator field discharge diode, an open suppression diode, or excessive heat can cause the transistor to become shorted.
6. If the reading is approximately 8 to 9 volts the transistor is burned open.
7. An open transistor can result from a direct short between the field winding leads ("A" and "B" in the wiring diagram, Fig. 30), or from interchanging the leads at the regulator "F" and "BAT" terminals.

8. If the reading is battery voltage, both the transistor and regulator resistor are burned open.
9. The transistor and resistor, if damaged, must be replaced before proceeding with the remaining checks.
10. To replace the resistor, merely unsolder the connections.
11. To replace the transistor, disconnect battery and all regulator leads and remove regulator from junction box. Then remove the two transistor attaching screws and unsolder the two transistor connections inside the regulator box.


**NOTE:** Do not reconnect the regulator leads until after the field discharge diode and suppression diode have been checked.

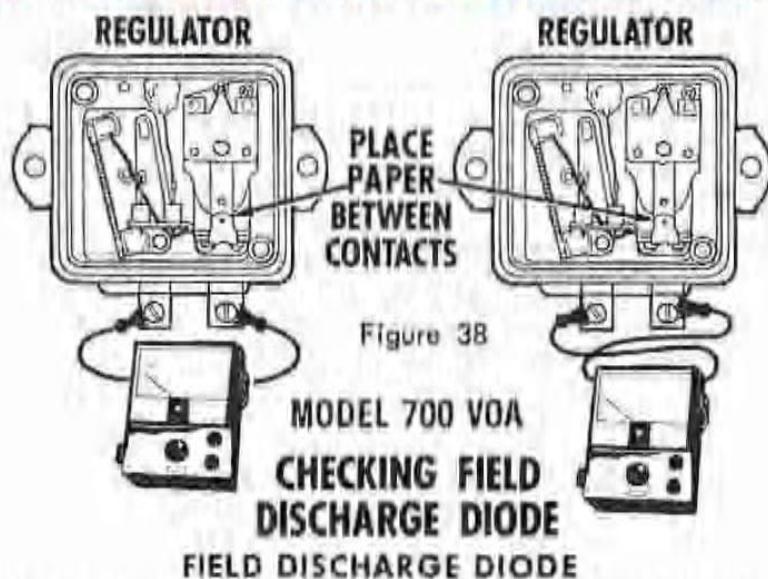

The following tests can be made on the Merc-O-Tonic analyzer selector switch position No. 3 Meter Scale No. 3.

1. To check the field discharge diode, place a small piece of clean white paper between the voltage contacts to insulate them. See Fig. 38.
2. Connect small leads from analyzer to the "F" and "BAT" (Fig. 38) terminals. (Note the readings).
3. Reverse the lead connections to the "F" and "BAT" (Fig. 38) terminals. (Note the readings).
4. If either reading is very high (**Infinite**), the regulator field discharge diode is open.
5. If both readings are approximately zero, the regulator field discharge diode is shorted.
6. Remove the small piece of paper.
7. To replace the diode, merely unsolder the connections.

**CAUTION:** Excessive heat will damage diode.

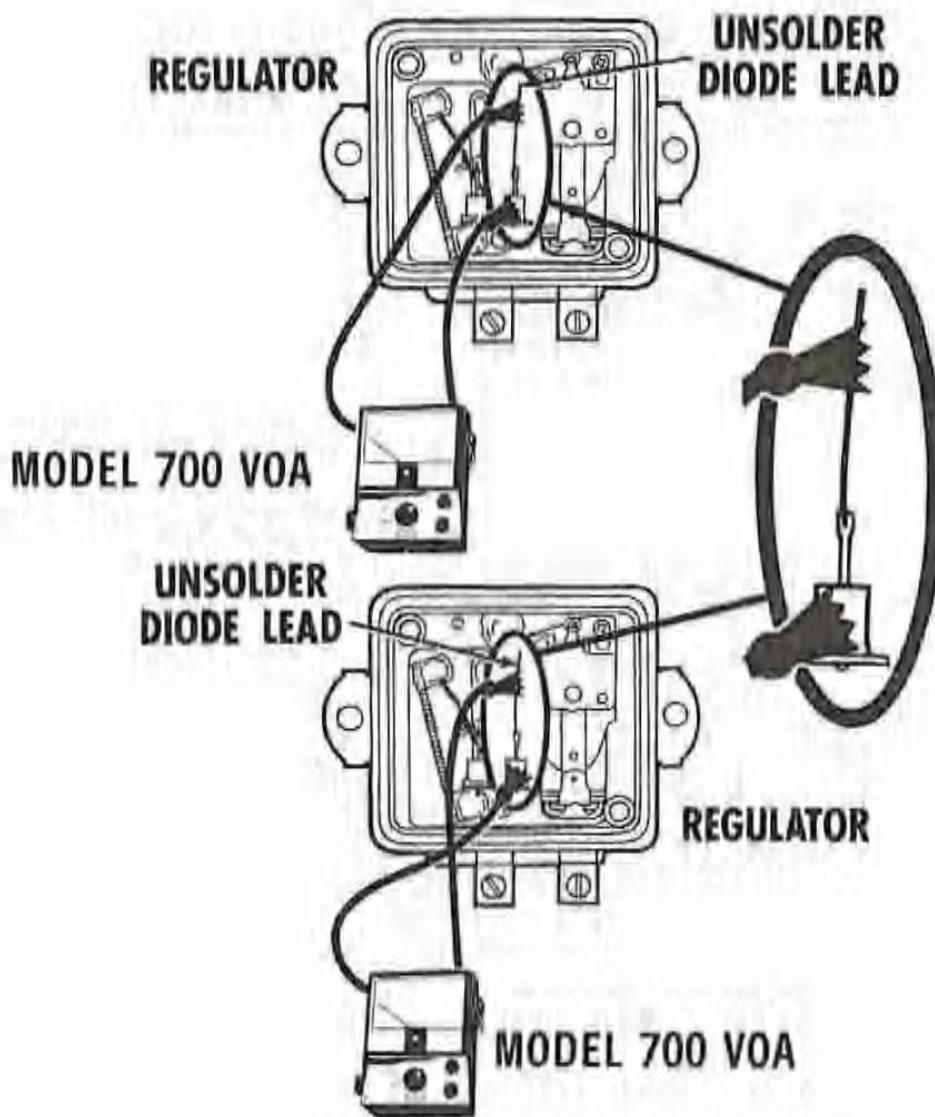

## CHECKING SUPPRESSION DIODE

Figure 39

### SUPPRESSION DIODE

1. To check the suppression diode, unsolder its lead from the regulator base and connect the small leads from analyzer from the diode lead to the diode case (Fig. 39). Use Test Position No. 3.
2. Then turn polarity reversing switch on Model 700 VOA.
3. If both readings are very high (infinite), the diode is open.
4. If both readings are zero, the diode is shorted.
5. To replace the diode, merely unsolder the connections.

CAUTION: Excessive heat will damage diode.

## RIFFLER FILE

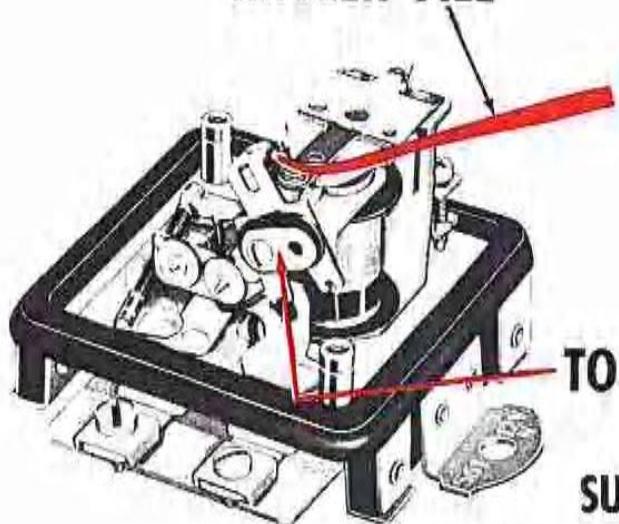


Figure 40

## TO CLEAN CONTACT POINTS (LOOSEN UPPER CONTACT SUPPORT MOUNTING SCREWS)

### CLEANING CONTACTS

1. If an open transistor was found in the previous check, the large voltage regulator contact must be cleaned with a spoon or riffler file as illustrated in Figure 40.
2. The small soft-alloy contact does not oxidize and must be cleaned with crocus cloth or other fine abrasive material.
3. Contacts should be washed with trichlorethylene or some other non-toxic cleaning solution to remove any foreign material.
4. After cleaning contacts run a piece of stiff paper (such as a business card) between contact under tension, thereby removing any film or foreign matter,

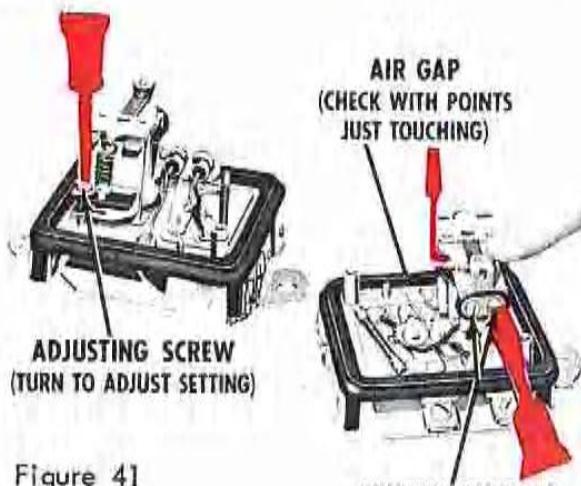


Figure 41

### ADJUSTING AIR GAP

1. After cleaning the contacts, set the air gap to .070 inch as shown in Figure 41.
2. Push the armature (not the flat spring) down against a gauge.
3. Adjust the upper contact support so the contacts are aligned squarely and just touch when the support screws are tightened.

**MANUFACTURERS SPECIFICATIONS  
FOR COIL AND CONDENSER  
TESTS ON MERC-O-TRONIC  
IGNITION ANALYZER.**

**TESTS MADE MUST  
BE WITHIN THE SPECIFIED  
TOLERANCES OR THE PART  
SHOULD BE REPLACED AS IT  
IS DEFECTIVE AND NOT UP  
TO MANUFACTURER'S  
SPECIFICATIONS.**

**ALL REFERENCES TO USE OF A 12-VOLT STORAGE  
BATTERY APPLY TO THE USE OF A MODEL 88, 98  
OR 98A ANALYZER ONLY.**



## SERVICE HINTS

### Ignition Failures

#### I. Engine Misfires at Idle or High Speed, Presuming Carburetion and Fuel Are OK, Check for: -

- Incorrect spark plug gap
- Defective or loose spark plugs
- Spark plugs of incorrect heat range
- Spark plug gap set incorrectly
- Sticking or weak breaker arm spring
- Incorrect breaker point gap
- Breaker points not synchronized
- Breaker points not properly adjusted
- Loose wire in primary circuit
- Defective distributor rotor
- Corroded or pitted breaker points
- Cracked distributor cap
- Leaking or broken high tension wires
- Weak armature magnets
- Worn cam lobes on distributor or magneto shaft
- Worn distributor or magneto shaft bushings
- Defective coil or condenser
- Defective ignition switch
- Spark timing out-of-adjustment

#### II. Engine Backfires

- Through Exhaust, Check for: -
- Cracked spark plug porcelain
- Carbon path in distributor cap
- Crossed spark plug wires
- Air leak at intake deflector
- Improper timing

#### III. Engine Pre-Ignition, Check for Ignition Causes: -

- Spark advanced too far
- Incorrect type spark plugs
- Burned spark plug electrodes
- Incorrect breaker setting

#### IV. Starter Motor - If There Is Excessive Current Draw, Check for: -

- Broken, jammed starter drive
- Dirty, gummed armature
- Shorted armature
- Grounded armature or field
- Resistance from engine
- Misaligned starting motor
- Worn armature shaft bearings
- Misaligned armature shaft
- Loose field pole pieces

## SERVICE HINTS - Cont'd.

### IV. Starter Motor (Cont'd)

If Starter Fails to Operate, Check for: -

- Poor battery ground
- Jammed drive
- Broken teeth on flywheel
- Direct ground in switch
- Solenoid dead or shorted
- Burned contact points in switch
- Improper seating brushes
- High mica between commutator segments
- Shorted armature
- Shorted field or brushes

### V. Distributor System Failures - With Ignition System as Guide, If There Is Breaker Point Oxidation, Check for: -

- High battery voltage
- Resistor of incorrect capacity
- High resistance in condenser circuit
- Incorrect type ignition coil

With Ignition System as Guide, If There Is Breaker Point Oxidation, Check for: -

- Extremely high voltage
- Moisture formation
- Excessive heat from engine

### VI. Electrical Failures - If Frequent Battery Charge Is Necessary, Check for: -

- Corroded battery terminals
- Alternator grounded or shorted
- Worn out, inefficient battery
- Rectifier defective
- Short circuit in charging circuit
- Excessive use of electrical units
- Short circuit in ignition switch

## AMC - "SABER"

Model No.	H. P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Capacity Microfarads
3D12M	3	1955	580128	580118	1.6	30 - 40	510173	.18-.22
3D13M	3	1956	580128	580118	1.6	30 - 40	510173	.18-.22
5D11M	5	1955	580183	580118	1.6	30 - 40	510173	.18-.22
5S12M	5	1955-56	580120	580118	1.6	30 - 40	510173	.18-.22
5D12M	5	1956	580182	580118	1.6	30 - 40	510173	.18-.22
12D11M	12	1955	580153	580118	1.6	30 - 40	510173	.18-.22
12D13M	12	1956	580207	580118	1.6	30 - 40	510173	.18-.22
22D10M	22	1955	580180	580118	1.6	30 - 40	510173	.18-.22
22DE10M	22	1955	580180	580118	1.6	30 - 40	510173	.18-.22
22D11M	25	1956	580209	580118	1.6	30 - 40	510173	.18-.22
22D13M	25	1956	580209	580118	1.6	30 - 40	510173	.18-.22
22DE13M	25	1956	580209	580118	1.6	30 - 40	510173	.18-.22

## MILAG - NUTME

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Capacity Microfarads
3D11A	3	1953-55	580128	580118	1.6	30 - 40	510173	.18-.22
3D12A	3	1955	580128	580118	1.6	30 - 40	510173	.18-.22
3D13A	3	1956	580128	580118	1.6	30 - 40	510173	.18-.22
5S11A	5	1955	580120	580118	1.6	30 - 40	510173	.18-.22
5D11A	5	1955	580183	580118	1.6	30 - 40	510173	.18-.22
5D12A	5	1956	580120	580118	1.6	30 - 40	510173	.18-.22
5D13A	5	1956	580182	580118	1.6	30 - 40	510173	.18-.22
12D11A	12	1954-55	580153	580118	1.6	30 - 40	510173	.18-.22
12D13A	12	1956	580207	580118	1.6	30 - 40	510173	.18-.22
22D10A	22	1955	580180	580118	1.6	30 - 40	510173	.18-.22
22DE10A	22	1955	580180	580118	1.6	30 - 40	510173	.18-.22
22D12A	22	1955	580180	580118	1.6	30 - 40	510173	.18-.22
22DE12A	22	1955	580180	580118	1.6	30 - 40	510173	.18-.22
25D11A	25	1956	580209	580118	1.6	30 - 40	510173	.18-.22
25D13A	25	1956	580209	580118	1.6	30 - 40	510173	.18-.22
25DE11A	25	1956	580209	580118	1.6	30 - 40	510173	.18-.22
25DE13A	25	1956	580209	580118	1.6	30 - 40	510173	.18-.22

**AUTO LITE - FORD**

Part No.	Capacity in Microfarads	Part No.	Capacity in Microfarads
IAT 3076 Jr	.21-.25	IBB 2042SS	.25-.28
IAT 3076 LA	.25-.28	IGB 1025, E, J,	.20-.25
IBB 2015, L, R.	.25-.28		

**AUTOLITE IGNITION COIL**

Coil No.	Type	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.	Condenser No.	Capacity Microfarads Min. Max.
200673		1.1	1.1 - 1.5	60 - 70		
710108		1.1	1.2 - 1.4	60 - 70		

**AUTOLITE BALLAST**

201010	Resistance	Min. .410	Max. .520
200673	Resistance	Min. .410	Max. .520

**FORD PRODUCTS**

Part No.	Capacity in Microfarads	Part No.	Capacity in Microfarads
IGA-12300B	.29-.32	7RA-123000	.21-.25
8EL-12300A	.20-.25	FAB-12300A	.21-.25
H-12300	.30-.34	B7A-12300A	.21-.25
7RA-12300B	.21-.25	B7A-12300B	.21-.25

**PRESTOLITE (THE ELECTRIC AUTOLITE CO.)**

Coil No.	Type	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.	Condenser No.	Capacity Microfarads Min. Max.
200668	Battery	.8	1.6 - 1.8	55 - 65		
200691	Battery	.57	3.5 - 3.9	55 - 65		
200692	Battery	.7	1.1 - 1.5	55 - 65		

BENDIX SCINTILLA  
COIL SPECIFICATIONS

Coil No.	Type	Maximum Amperage
4936 .....	PN .....	2.30
4998 .....	GN .....	1.95
5179 .....	MN .....	2.10
2-306 .....	VAG .....	1.95
2-751 .....	SF9-SB9 .....	1.90
2-752 .....	VAG .....	2.10
10-1518 .....	SGA .....	2.10
10-2160 .....	C-CR-CG .....	1.60
10-2160 .....	Bendix "C" Series .....	1.55
10-2160W .....	Bendix "C" Series .....	1.35
10-2160Y .....	Bendix "C" Series .....	1.60
10-5294 .....	SCA .....	2.30
10-6710 .....	MN4-6 .....	2.00
10-8548 .....	PC Series .....	1.75
10-9247 .....	12 Volt Battery Coil .....	1.10
10-9267 .....	6 Volt Battery Coil .....	1.45
10-9606 .....	SG Series .....	1.75
10-13165 .....	SF4-SB5-SB6 .....	1.70
10-13623Y .....	SF14-1 .....	1.80
10-13624 .....	SCD-1 .....	1.90
10-13625Z .....	SB14-1 .....	1.80
10-13760 .....	Bendix "C" Series .....	1.60
10-14856 .....	MN .....	2.10
10-14857 .....	VMN Series .....	2.10
10-15829 Y, W, V .....	PA Series .....	1.80
10-15829U .....	PA Series .....	1.90
10-16144 .....	12 Volt Battery Coll-H Comp. ....	1.10
10-17288 and Y .....	CBR Series .....	1.60
10-17970Y .....	LA Series .....	1.00
10-54007 .....	H Series .....	1.90
10-57460 .....	LA Series .....	1.35
10-77308 .....	H1 Series .....	1.60
10-77379 .....	H1 Series .....	1.60
10-77334 .....	H2 Series (Single SPK) .....	1.80
10-79157 .....	K Series .....	2.30
10-B1703 .....	VAG Series .....	2.10
10-82215 .....	K Series .....	1.60
10-82241 .....	K Series .....	2.30
10-82259 .....	K Series .....	2.30
*10-84356Y .....	K Series .....	1.80
10-86641 .....	K Series .....	1.60

\*Test with coil on stator plate and insulate between contact points.

**BENDIX SCINTILLA**  
**COIL SPECIFICATIONS (Cont'd)**

K Series Coil No.	Operating Amperage		Maximum Secondary Continuity
	On Stator Plate	Off Stator Plate	
10-3822 .....	2.0	2.3	60
10-38222Y .....	2.0	2.3	60
10-50715 .....	1.8	2.1	60
10-70100 .....	1.8	2.1	50
10-70128 .....	1.8	2.1	50
10-70132 .....	1.8	2.1	50
10-70169 .....	1.8	2.1	50
10-70161 .....	2.1	2.4	60
10-70199 .....	2.1	2.4	60
10-94097 .....	1.8	.....	45
10-111287 .....	1.8	.....	58

## BENDIX SCINTILLA CONDENSER SPECIFICATIONS

Condenser No.	Type	Minimum Capacity
10-13373Y	VMN Series	.18
10-17453	C Series	.29
10-12049	PA, PB Fixed Spark	.17
10-15061	PA, PB Variable Spark	.17
10-81927	PA6/2F	.17
10-12049	PC	.17
2-755Y	VAG Series	.17
10-82104	H Series	.15
10-55555	H1-21	.14
10-38350W	K Series	.15
10-54916	K Series	.15
10-54954	K Series	.15
10-70141	K Series	.17
10-70162	K Series	.15
10-76413	K Series	.35
10-79125	K Series	.15
10-79168Y	K Series	.27
10-79188	K Series	.15
10-82104	K Series	.13
10-82207	K Series	.29
10-82238	K Series	.15
10-86610	KKSeries	.15
10-23186	OA1	.16
10-23186	OA2 (10-20650-2)	.16
10-56546	OA2 (10-32420-1)	.14
10-17453	LA	.29
10-85252	LA	.60
10-81958	LAR	.7
10-81956	LAR	.1.5
10-85256	LAR	.1.5
10-4341Z	S-1	.15
10-20654	S-1	.20
10-20654	DS-1	.20
10-37626	S4R(L)N-32	.18
10-37626	S6R(L)N-32	.18
10-3159Z	BA Battery Timer	.29
10-53229	SW6LN-12 Battery Timer	.22
10-15061	WN Battery Timer	.17
10-81650	Automag	.18
10-102513	LC	.78
10-102513	DLC L.H.	.78
10-102514	DLC R.H.	.78
10-88603		.23

**AMERICAN BOSCH COIL SPECIFICATIONS  
FOR MODEL 88 & MODEL 98 MAGNETO IGNITION ANALYZERS**

Coil No.	Type	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
AA63736	AB33-1922	1.45		
AA68936	AB34	1.55		
AA74709	ZR4 IS	1.45		
AA75795	AT4-AT4/2	1.05		
AA75798	DU4 ED 18 to 36	1.30		
AA75798	ZR4 ED 26	1.30		
AA76184	DU6 ED 18 to 26	1.10		
AA77815	U4 ED 1,2,3	.95		
AA77839	U2 ED 1	1.05		
AA78168	U1 ED 1	1.30		
AA81878	U4 ED 4	.95		
CL521	MJA (Special)	1.30		47 - 57
CL523	MJA Ed. B & C	1.30		47 - 57
CL524	MJB, Ed. A, MRF (variable timing)	1.30		52 - 62
CL527	MJC 4A & 6A	1.11		52 - 62
CL528	MJC 1A & MJC 1B	1.17		52 - 62
CL529	MJA (Special)	1.15		47 - 57
CL5210	MJC 6A	1.10		--
CL5217	RF 41, 42 ED. 1	1.85		--
CL5220	MJA, Heavy Duty	1.00		--
CL5231	MJC 4A, 6A, 4B, 6B	1.11		52 - 62
CL5234	MVA 2A, 2A 310, 6A 2108	1.40		52 - 62
CL5236	MVA 1A, 1A 310, 6A 2108	1.40		--
CL5238	MJC, Ed. C, 4C & 6C	1.30		52 - 62
CL5239	MJH 1C	1.30		--
CL5244	MJD	1.65		--
CL5246	MVA Ed. A	1.40		--
CL5249	MJC Ed. C	1.30		--
CL5286	MJC Ed. C	1.30		52 - 62
CL5293	MJH 2 C	1.70		--
CL5297	MJC ED. C	1.30		--
CL5298	MJK Ed. A & B	1.40		50 - 60
CL52107	MRF, MJB, ED. B, 4 cyl (fixed timing)	1.30		52 - 62
CL52109	MJA Ed. D	1.30		47 - 57
CL52112	MJH	1.40		50 - 60
CL52115	MRD	1.30		52 - 62
CL52116	MJA	1.30		50 - 60
CL52117	MRD	1.45		48 - 58
CL52118	MRA, Ed. A	1.30		52 - 62
CL52119	MJH 4C	1.30		47 - 57
CL52121	MJC Ed. C	1.30		52 - 62
CL52127	MJC Ed. C	1.30		52 - 62
CL52134	MJH, MRD	1.45		48 - 58
CL52137	MRD	1.45		48 - 58
CL52141	MJA Ed. D	1.30		47 - 57
CL52143	MRD Ed. A	1.45		48 - 58
CL52145	MRE Ed. A	1.40		48 - 58
CL52158	MRB with CLC 6	1.70		Off Scale
CL52158	MRB with CLC 12	1.70		Off Scale
CL52158	MRB with CLT 40	2.20		Off Scale
CL52159	MRB with CLC 6	1.70		Off Scale
CL52159	MRB with CLC 12	1.70		Off Scale
CL52159	MRB with CLT 40	2.20		Off Scale
CL52162	MSB with CLC 6	1.5		Off Scale

**AMERICAN BOSCH COIL SPECIFICATIONS  
FOR MODEL 88 & MODEL 98 MAGNETO IGNITION ANALYZERS (Cont'd)**

Coil No.	Type	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
CL52162	MSB with CLC 12	1.3		Off Scale
CL52162	MSB with CLT 40	1.9		Off Scale
CL52163	MJA with CLC 6	2.0		Off Scale
CL52163	MJA with CLC 12	2.0		Off Scale
CL52163	MJA with CLT 40	2.7		Off Scale
CL52164	MRA Ed. B, MJK	1.30		52 - 62
CL52165	MRA, MJA	1.30		52 - 62
CL52166	MRA	1.30		52 - 62
CL52167A	MRA	1.30		52 - 62
CL52168A	MRA	1.30		52 - 62
CL52172	MJB with CLC 6	1.7		Off Scale
CL52172	MJB with CLC 12	1.7		Off Scale
CL52172	MJB with CLT 40	2.2		Off Scale
CL52173	MRL with CLC 6	1.7		Off Scale
CL52173	MRL with CLC 12	1.7		Off Scale
CL52173	MRL with CLT 40	2.2		Off Scale
CL521001	MJF (Special)	1.30		52 - 62
CL521005A		1.5	.4 .5	50 - 60
CLC6A	Low tension mag. ign. transformer	.98		
CLC6A 5	Low tension mag. ign. transformer	.98		
CLC6A 8	Low tension mag. ign. transformer	.98		
CLC12A55		.7	3 4	45 - 55
CLT10A15		.8	10 12	45 - 55
SA75393	FY ED 2	2.00		
SA78081	FY 12 ED 2,3,4	2.05		
SA78308	FY2,6,13,17,28,36	2.20		
SA79555	FY 18 ED 1	1.80		
SA81426	FY 30 ED 1	1.30		
SA81603	FY 33 ED 1	2.00		
SA82995	S ED 1	.82		
SA83054	FY 37 ED 1	1.97		
SA84383	RF 17 ED 1	2.25		
WC2580	ZEV	1.50		
WC2594	AB 33-AB34-BA-AZ	1.45		
WC6040	AB34	1.45		
WC69342	FXI, 2, SPK-FBC 2 SPK	2.10		
WC73360	DU4 & 6-ZR 4 & 6	1.15		
WC74792	AT 4 & 6	1.05		
WC76104	FBC, FXI-FH-FB 1 & 2	1.50		
WC77803	U4 ED 1,2,3, F1	1.05		
WC79444	U6 ED 1	.98		
WC82913	SU4, ED 1,2,3,4	1.05		
WC82995	S ED 1	.82		
WC86187	U4 ED 2 (LOW SPEED)	1.00		
WC86188	U 4/2-U4, ED 2 and 4 (low speed)	1.00		

AMERICAN BOSCH CONDENSER SPECIFICATIONS  
FOR MODEL 88 & MODEL 98 MAGNETO IGNITION ANALYZERS

Condenser No.	Variation Condenser	Magneto	Capacity Reading in Microfarads	
			Min.	Max.
CW522			.33	.39
CW527	MJC		.22	.27
	CW5232	MJC	.22	.27
	CW5279	MRD, MSA	.22	.27
	CW5293	MRD	.22	.27
	CW52131	MSB	.22	.27
CW5210		MJA, MJB, MJF, MRA, MRF	.33	.39
	CW5291	MJA, MJB, MJF, MRA, MRF	.33	.39
	CW5296	MJA, MJB, MJF, MRF, MRA	.33	.39
	CW5298	MJA, MJB, MJF, MRA, MRF	.33	.39
CW5224			.22	.27
CW5232			.22	.27
CW5249	MRB		.70	.85
CW5250			.22	.27
CW5252	MJF		.33	.39
CW5260			.22	.27
CW5263			.22	.27
CW5279			.22	.27
CW5291			.33	.39
CW5292			.28	.35
CW5293			.22	.27
CW5296			.33	.39
CW5297	MRB, MRL		.70	.85
CW5298			.33	.39
CW5299			.70	.85
CW52110	MJK		.28	.35
CW52131	CW5292	MJK	.28	.35
			.25	.28

## ROBERT BOSCH COIL SPECIFICATIONS (GERMAN)

Coil No.	Ski-Doo No.	Operating Amperage	Primary Resistance Min. Max.		Secondary Continuity Min. Max.	
*0-221-500-800	4027008	0.6	1.6	2.0	50	60
*2-204-211-005		1.0	1.6	1.8	40	50
*2-204-210-013	4024038	1.0	1.8	2.1	35	45
2-204-210-041		1.0			45	55
*2-204-211-008	4024040	1.0	1.5	1.9	40	50
*2-204-211-029		1.5	.7	1.3	35	45
2-204-211-030		1.7	.4	.5	45	55
2-204-211-070		1.5			45	55
2-204-710-041 (Polaris) Red Core		1.2	1.7	2.1	40	50
000-43-05.554 (Polaris) Green Core		.65	1.7	2.1	40	50
5034T2 (Polaris)			1.7	2.1	40	50
MZAN4T-12 "Red Core" (Polaris)		1.2	.6	.9	45	55
MZAN4T-12 "Green Core" (Polaris)		.65	1.7	2.1	40	50
*TJ 12/1		.7	2.9	3.5	45	60
*TK 12A3		.7	3.2	3.6	50	60
9B00B		1.3			40	50
10B0		1.2			50	60
13B00		1.5			45	55
*0-212-940-001	4027008	0.6	1.6	2.0	50	60

## GERMAN BOSCH LIGHTING COIL SPECIFICATIONS

Coil No.	Ski-Doo No.	Operating Amperage	Resistance
1-214-210-042	4024083		.4
1-214-216-160	4024084		.7
	4027014	Short Lead	1.2
1-214-210-163	and 4027015	2-Leads Long Lead	1.0 .8
1-214-210-056			

## GERMAN BOSCH CONDENSER SPECIFICATIONS

Condenser No.	Ski-Doo No.	Capacity Reading in Microfarads	
		Min.	Max.
1-237-330-035	4024067 7	.13	.17
1-237-330-037 (Polaris)	4024068 8	.26	.30
1 LMK01Z32 (Polaris)		.23	.27
9B01		.14	.18
10B00		.11	.15
1237-330-036		.11	.15
1217-330-048		.11	.15

\*NOTE: To test coil, disconnect the 7-1/2 volt internal battery and connect leads to a 12 volt battery for coil power test only.

CAUTION: DO NOT USE THE 12 VOLT BATTERY FOR ANY OTHER TESTS.

**ROBERT BOSCH COIL SPECIFICATIONS (GERMAN)**

Coil No.	Type	Operating Amperage
WZ8164 . . . . .	DR2 spk. . . . .	1.50
ZA27279/7 . . . . .	Z4-Z6 . . . . .	1.30
ZA27279/8 . . . . .	ZR-ZU4, 6 Dual . . . . .	1.20
ZA27279/9 . . . . .	P29h2-V1-V2 . . . . .	1.30
ZA27279/11. . . . .	Z2 spk. . . . .	1.40
ZA27279/12. . . . .	ZU-4, 6-ZR4, 6-2 spk. . . . .	1.20
ZA29035 . . . . .	ZR6-2 . . . . .	1.20
ZA29192 . . . . .	P22h2-V1-V2 . . . . .	1.30
ZA29244 . . . . .	P30h2-V1 . . . . .	1.60
ZA29362 . . . . .	DU4, 6, ZR4, 6 DR4 . . . . .	1.55
ZAK1/15. . . . .	FF4, 6, FF4A, FF6A . . . . .	1.75
ZAK1/16. . . . .	FF1, 2-FFV . . . . .	1.75
ZAK1/18. . . . .	FF1A-FF2A-FFVA . . . . .	1.75
ZAK2/11. . . . .	FFC1-FFC1A-FFC1AR. . . . .	1.30
ZAK4/11. . . . .	FR4, 6-FR4A-FR4B. . . . .	.95
ZAK10/11. . . . .	FU4, 6-FU4A, FU4B, FU6B. . . . .	1.25

**ROBERT BOSCH (GERMAN)**

Coil No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
TK12A9	1.2	1.7- 2.1	50 - 60
TK6A3	1.2	1.0- 1.4	50 - 60
TK12A11	.7	2.8- 3.3	45 - 55
TK6A11	1.2	1.0- 1.4	45 - 55
TE6B3	1.3	.9- 1.3	40 - 50
TK12A3	.75	3.0- 3.6	50 - 60
TK6A7	1.2	1.0- 1.4	45 - 55

## BRIGG &amp; STRATTON

Model No.	Coil No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
100200				
100900	298316	1.8	.18-.24	25-35
60000				
80000	298502	1.8	.18-.24	25-35
60000				
80000	298654	1.8	.18-.24	25-35
243000	298968	1.6	.18-.24	40-50
144000	298968	1.6	.18-.24	40-50
145000	298968	1.6	.18-.24	40-50
146000	298968	1.6	.18-.24	40-50
147000	298968	1.6	.18-.24	40-50
193000	298968	1.6	.18-.24	40-50
233000	298968	1.6	.18-.24	40-50

Condenser No.	Capacity Microfarads
29861.....	.16-.26
291369 .....	.16-.26
294-628 .....	.16-.26

## BRIGGS &amp; STRATTON MAGNETO COIL SPECIFICATIONS

Coil No.	Engine Models	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
291617-A		1.7	.25 .35	45 55
291617	6-6B	1.7	.3 .5	35 45
292184	6-6B			
294319	6B			
295680	6B			
295845	140000-141000-142000-143000			
296084	6B			
296171	80600-81600-80800-81800-84500-85500-84900-85900			
296703	140000-141000-142000-143000			
296834	140000-141000-142000-143000			
296858	60000-80000			
297320	140000-141000-142000-143000			
297594	100200-100900	1.7	.28 .34	50 60
290880	9-14-19-23	1.15		36 56
29656	A-B-ZZ	.5	.6 .8	40 50
29657	A-B-ZZ			
293289	A-B-ZZ			
*295915	6B	2.0	.2 .35	40 50
*293431	9-14-19-23	1.2	.5 .7	50 60
297307	60000-80000			
(Use 298502)		1.6	.2 .3	25 35
298274	60000-80000			
298316	100200-10900	1.8	.18 .24	25 35
298443	60000-80000			
298502	60000-80000	1.6	.2 .3	25 35
298524	100200-100900			
298654	60000-80000			
298968	144000-145000-146000-147000 193000-233000-243000	1.4	.2 .3	40 50
299366		1.5	.22 .28	37 47

\*NOTE: Double lead secondary (see page 23, Figure 26 for Test Procedure.)

## BRITISH SEAGULL

Coil No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Resistance Min. Max.	Condenser No.	Capacity Microfarads Min. Max.
AM1634E	2.0	.28-.32	30-40	Villiers	.20-.26

## BRIDGESTONE BY ROCKFORD MOTORS INC.

Model No.	Mfgr.	Coil No.	Type	Oper. Amps	Primary Resistance Min. Max.	Secondary Continuity Min. Max.	Condenser No.	Capacity Microfarads Min. Max.
BS-HM/S 50 Leader	Rockford	GA1-17211 E19221	Ignition Lighting	1.5	1.0-1.2 .05	35-45	E19241	.25-.30
BS-7S Spartster Std.	Rockford	GA1-17211 E19221	Ignition Lighting	1.5	1.0-1.2 .05	35-45	E19241	.25-.30
BS-7D Sportster Del.	Rockford	E09301	Ignition	.6	5.4-6.7	50-60	E09105	.25-.30
BS-90 BS-90T BS-90M BS-90 Sport.	Rockford	EA1-89310	Ignition	.7	2.0-2.5	55-65	EA1-17241	.25-.30
BS-90 BS-90T BS-90M BS-90 Sport.		EA1-17212	Ignition Primary		.6-.7			
BS-50S BS-60S Sport.	Rockford	EA1-17213	Lighting		.5			
BS-50S BS-60S	Rockford	EA1-38310	Ignition	.7	2.0-2.5	55-65	EA1-17241	.25-.30
BS-175DT	Rockford	GB1-17212 GB2-17213	Ignition Pri. Lighting		.6-.7 .1-.14			
		8501-8000	Ignition (2)	.8	4.2-5.2	60-70	1753-8000	.25-.30

NOTE: To test above coils, disconnect the internal 7-1/2 volt battery and connect leads to a 12 volt storage battery or equal. Connect our part #55-174 suppressor in series with one test lead. Caution: Do not use the 12 volts for any other tests as all other readings will be incorrect.

## BUNDY MARINE

Magneto Coil No.	Mfg. No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
300-1535	TJ616	.75	3.3- 3.7	55 - 65
Generator Coil No.				Resistance Reading Min. -Max.
300-1503 . . . . .				.4-.55
Low Tension Coil No.				Resistance Reading Min. -Max.
300-1500 . . . . .				1.55-1.85
Diodes No.				Resistance Reading
300-1113 . . . . .			See page 24B for testing.	

## J. I. CASE COMPANY COIL SPECIFICATIONS

20CMA . . . . .	4JCMA . . . . .	1.90
20JMA . . . . .	4JMA . . . . .	2.05

## CHRYSLER (FORMERLY WEST BEND OUTBOARD MOTORS)

Motor Model No.	H.P.	Year	Wico Coil No.	Operating Amp.	Coil Continuity Min.-Max.	Wico Cond. No.	Cond. Cap. Mfd.
160211	2	1956	X7500	2.10	30 - 50	X5463	.16 - .20
160221	2	1957	X7500	2.10	30 - 50	X9182	.26 - .30
2801	2	1958	X7500	2.10	30 - 50	X9182	.26 - .30
2802	2	1958	X11406	2.10	40 - 60	X11397	.16 - .20
160501	5-1/2	1956	X7500	2.10	30 - 50	X9327	.26 - .30
160511	5-1/2	1956	X7500	2.10	30 - 50	X9327	.26 - .30
160521	6	1957	X7500	2.10	30 - 50	X9327	.26 - .30
160531	6	1957	X7500	2.10	30 - 50	X9327	.26 - .30
6801	6	1958	X7500	2.10	30 - 50	X9327	.26 - .30
6802	6	1958	X11406	2.10	40 - 60	X11397	.16 - .20
160701	7-1/2	1956	X7500	2.10	30 - 50	X9327	.26 - .30
160711	7-1/2	1956	X7500	2.10	30 - 50	X9327	.26 - .30
160721	8	1957	X7500	2.10	30 - 50	X9327	.26 - .30
160731	8	1957	X7500	2.10	30 - 50	X9327	.26 - .30
8801	8	1958	X7500	2.10	30 - 50	X9327	.26 - .30
8802	8	1958	X11406	2.10	40 - 60	X11397	.16 - .20
160902	12	1956	X7500	2.10	30 - 50	X9327	.26 - .30
160912	12	1956	X7500	2.10	30 - 50	X9327	.26 - .30
160941	12	1957	X7500	2.10	30 - 50	X9327	.26 - .30
160951	12	1957	X7500	2.10	30 - 50	X9327	.26 - .30
12801	12	1958	X7500	2.10	30 - 50	X9327	.26 - .30
12811	12	1958	X7500	2.10	30 - 50	X9327	.26 - .30
12802	12	1958	X11406	2.10	40 - 60	X11397	.16 - .20
12812	12	1958	X11406	2.10	40 - 60	X11397	.16 - .20
35841	35	1958	X11563	0.75	50 - 60	X11337	.26 - .30
35851	35	1958	X11563	0.75	50 - 60	X11337	.26 - .30
35861	35	1958	X11563	0.75	50 - 60	X11337	.26 - .30
35871	35	1958	X11563	0.75	50 - 60	X11337	.26 - .30

## CHRYSLER (FORMERLY WEST BEND OUTBOARD MOTORS Cont'd)

Motor Model No.	H.P.	Year	Fairbanks-Morse Coil No.	Operating Amp.	Coil Continuity Min.-Max.	Fairbanks-Morse Cond. No.	Cond. Cap. Mfd.
1609403	25	1956	LX2477	1.50	40 - 60	S2433	.28 - .33
1609413	25	1956	LX2477	1.50	40 - 60	S2433	.28 - .33
1609602	25	1956	LX2477	1.50	40 - 60	S2433	.28 - .33
1609612	25	1956	LX2477	1.50	40 - 60	S2433	.28 - .33
160421	30	1957	LX2477	1.50	40 - 60	S2433	.28 - .33
160431	30	1957	LX2477	1.50	40 - 60	S2433	.28 - .33
160621	30	1957	LX2477	1.50	40 - 60	S2433	.28 - .33
160631	30	1957	LX2477	1.50	40 - 60	S2433	.28 - .33
160801	30	1957	LX2477	1.50	40 - 60	S2433	.28 - .33
160811	30	1957	LX2477	1.50	40 - 60	S2433	.28 - .33
35801	35	1958	LX2477	1.50	40 - 60	S2433	.28 - .33
35811	35	1958	LX2477	1.50	40 - 60	S2433	.28 - .33
35821	35	1958	LX2477	1.50	40 - 60	S2433	.28 - .33
35831	35	1958	LX2477	1.50	40 - 60	S2433	.28 - .33
WICO							
BATTERY IGNITION	40 - 80	1957-60	X11563	0.75	50 - 60	X11337	.26 - .30

\* Wico

## CHRYSLER (FORMERLY WEST BEND) OUTBOARD MOTORS Cont'd)

\*\* Fairbanks-Morse

Motor Model No.	H.P.	Year	Coil No.	Operating Amp.	Continuity Min. Max.	Cond. No.	Cond. Capacity Microfarads
6901	6	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
6911	6	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
6902	6	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
6912	6	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
8901	8	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
8911	8	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
8902	8	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
8912	8	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
12901	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
12911	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
12902	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
12912	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
16901	16	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
16911	16	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
16902	16	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
16912	16	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
35901	35	1959	** LX2477	1.5	40 - 60	** S2433	.28-.32
35911	35	1959	** LX2477	1.5	40 - 60	** S2433	.28-.32
35921	35	1959	** LX2477	1.5	40 - 60	** S2433	.28-.32
35931	35	1959	** LX2477	1.5	40 - 60	** S2433	.28-.32
35941	35	1959	** LX2477	1.5	40 - 60	** S2433	.28-.32
35951	35	1959	** LX2477	1.5	40 - 60	** S2433	.28-.32
35961	35	1959	* X11563	.75	50 - 60	* X11337	.26-.30
35971	35	1959	* X11563	.75	50 - 60	* X11337	.26-.30
35981	35	1959	* X11563	.75	50 - 60	* X11337	.26-.30

\* Wico

## CHRYSLER (FORMERLY WEST BEND OUTBOARD MOTORS Cont'd)

\*\* Fairbanks-Morse

Motor Model No.	H. P.	Year	Coil. No.	Operating Amp.	Continuity Min. Max.	Cond. No.	Cond. Capacity Microfarads
35991	35	1959	* X11563	.75	50 - 60	* X11337	.26-.30
35982	35	1959	* X11563	.75	50 - 60	* X11337	.26-.30
35992	35	1959	* X11563	.75	50 - 60	* X11337	.26-.30
40901	40	1959	** LX2477	1.5	40 - 60	** S2433	.28-.32
40911	40	1959	** LX2477	1.5	40 - 60	** S2433	.28-.32
40902	40	1959	** LX2477	1.5	40 - 60	** S2433	.28-.32
40912	40	1959	** LX2477	1.5	40 - 60	** S2433	.23-.32
40961	40	1959	* X11563	.75	50 - 60	* X11337	.26-.30
40971	40	1959	* X11563	.75	50 - 60	* X11337	.26-.30
40962	40	1959	* X11563	.75	50 - 60	* X11337	.26-.30
40972	40	1959	* X11563	.75	50 - 60	* X11337	.26-.30
40963	40	1959	* X11563	.75	50 - 60	* X11337	.26-.30
40973	40	1959	* X11563	.75	50 - 60	* X11337	.26-.30
2901	2	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
7001	7-1/2	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
7002	7-1/2	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
8001	8	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
12021	12	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
12031	12	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
18001	18	1960	* X12302	2.2	40 - 55	* X12303	.16-.20
18011	18	1960	* X12302	2.2	40 - 55	* X12303	.16-.20
25021	25	1960	** LX2477	1.5	40 - 60	** S 2433	.28-.32
25031	25	1960	** LX2477	1.5	40 - 60	** S 2433	.28-.32
40001	40	1960	** LX2477	1.5	40 - 60	** S 2433	.28-.32
40011	40	1960	** LX2477	1.5	40 - 60	** S 2433	.28-.32

\* Wico

## CHRYSLER (FORMERLY WEST BEND OUTBOARD MOTORS Cont'd)

\*\* Fairbanks-Morse

Motor Model No.	H.P.	Year	Coil No.	Operating Amp.	Continuity Min.-Max.	Cond. No.	Cond. Capacity Microfarads
40021	40	1960	** LX2477	1.5	40 - 60	** S2433	.28-.32
40031	40	1960	** LX2477	1.5	40 - 60	** S2433	.28-.32
40061	40	1960	* X11563	.75	50 - 60	* X11337	.26-.30
40071	40	1960	* X11563	.75	50 - 60	* X11337	.26-.30
2101	2	1961	* X12660	1.8	40 - 55	* X12174	.16-.20
2102	2	1961	* X11406	2.1	40 - 60	* X11397	.16-.20
7001	7-1/2	1961	* X11406	2.1	40 - 60	* X11397	.16-.20
7002	7-1/2	1961	* X11406	2.1	40 - 60	* X11397	.16-.20
12101	12	1961	* X11406	2.1	40 - 60	* X11397	.16-.20
12102	12	1961	* X11406	2.1	40 - 60	* X11397	.16-.20
18101	18	1961	* X12302	2.2	40 - 55	* X12303	.16-.20
18111	18	1961	* X12302	2.2	40 - 55	* X12303	.16-.20
18102	18	1961	* X12302	2.2	40 - 55	* X12303	.16-.20
18112	18	1961	* X12302	2.2	40 - 55	* X12303	.16-.20
25121	25	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32
25131	25	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32
25122	25	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32
25132	25	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32
40101	40	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32
40111	40	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32
40102	40	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32
40112	40	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32
40121	40	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32
40131	40	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32
40122	40	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32
40132	40	1961	** LX2477	1.5	40 - 60	** S2433	.28-.32

## 1966 CHRYSLER OUTBOARD CORP.

Model No.	H.P.	Coll No.	Oper. Amp.	Primary Resistance Min. Max.	Secondary Continuity Min. Max.	Condenser No.	Capacity Microfarads Min. Max.
360	3.5	X12940	1.5	.45-.65	50 - 60	X12174	.16-.20
361	3.5	X12940	1.5	.45-.65	50 - 60	X12174	.16-.20
660	6.0	X14877	1.4	.4 -.6	50 - 60	X11397	.16-.20
960	9.2	X14877	1.4	.4 -.6	50 - 60	X11397	.16-.20
964	9.2	X14877	1.4	.4 -.6	50 - 60	X11397	.16-.20
2060	20.0	X14381	1.4	.4 -.6	50 - 60	X12303	.16-.20
2061	20.0	X14381	1.4	.4 -.6	50 - 60	X12303	.16-.20
2064	20.0	X14381	1.4	.4 -.6	50 - 60	X12303	.16-.20
3401		X12660	1.8		40 - 55	X12174	.16-.20
3560	35.0	TX2477	1.5	.62-.68	45 - 55	S2433	.28-.32
3563	35.0	TX2477	1.5	.62-.68	45 - 55	S2433	.28-.32
4562	45.0	TX2477	1.5	.62-.68	45 - 55	T12042	.30-.33
4563	45.0	TX2477	1.5	.62-.68	45 - 55	T12042	.30-.33
5062	50.0	TX2477	1.5	.62-.68	45 - 55	X11337	.26-.30
5063	50.0	TX2477	1.5	.62-.68	45 - 55	X11337	.26-.30
5066	50.0	TX2477	1.5	.62-.68	45 - 55	S2433	.28-.33
5067	50.0	TX2477	1.5	.62-.68	45 - 55	S2433	.28-.33
6401		X11406	2.1		40 - 60	X11397	.16-.20
7566	75.0	A85475-1	1.0	1.6-2.0	63 - 73	14022	.38-.40
7567	75.0	A85475-1	1.0	1.6-2.0	63 - 73	14022	.38-.40
10401-		X11406	2.1		40 - 60	X11397	.16-.20
10566	105.0	A85475-1*12V	1.0	1.7-2.3	65 - 75	14022	.38-.40
10567	105.0	A85475-1*12V	1.0	1.7-2.3	65 - 75	14022	.38-.40
20401		X14381	1.4	.4-.6	50 - 60	X12303	.16-.20
35401-		TX2477	1.5	.62-.68	45 - 55	S2433	.28-.36
45421-		TX2477	1.5	.62-.68	45 - 55	S2433	.28-.36
45431		TX2477	1.5	.62-.68	45 - 55	S2433	.28-.36
45423-		TX2477	1.5	.62-.68	45 - 55	S2433	.28-.36
50421-		TX2477	1.5	.62-.68	45 - 55	S2433	.28-.36
50431		TX2477	1.5	.62-.68	45 - 55	S2433	.28-.36
50461-		TX2477	1.5	.62-.68	45 - 55	S2433	.28-.36
50471		X11563	0.75		40 - 60	X11337	.26-.30
80461-		X11563	0.75		40 - 60	X12647	.26-.30
80471		X11563	0.75		40 - 60	X12647	.26-.30
80242-		X11563	0.75		40 - 60	X12647	.26-.30
80252		X11563	0.75		40 - 60	X12647	.26-.30
9501		X11406	2.1		40 - 60	X11397	.16-.20

CHRYSLER (FORMERLY WEST BEND  
INDUSTRIAL ENGINES)

\* Wico

\*\* Fairbanks-Morse

Motor Model No.	Cell No.	Operating Amp.	Cell Continuity Min.-Max.	Cond. No.	Cond. Capacity Microfarads
2725	* X11260	1.8	40 - 55	* X11000	.16-.23
2760	* X11260	1.8	40 - 55	* X11000	.16-.23
2761	* X11260	1.8	40 - 55	* X11000	.16-.23
27612	* X11260	1.8	40 - 55	* X11000	.16-.23
2762	* X11260	1.8	40 - 55	* X11000	.16-.23
2763	* X11260	1.8	40 - 55	* X11000	.16-.23
2764	* X11260	1.8	40 - 55	* X11000	.16-.23
2785	* X9055	2.1	35 - 55	* X9100	.26-.30
27882	* X11260	1.8	40 - 55	* X11000	.16-.23
27883	* X11260	1.8	40 - 55	* X11000	.16-.23
27812	* X11260	1.8	40 - 55	* X11000	.16-.23
27813	* X11260	1.8	40 - 55	* X11000	.16-.23
27822	* X11260	1.8	40 - 55	* X11000	.16-.23
27823	* X11260	1.8	40 - 55	* X11000	.16-.23
27824	* X11260	1.8	40 - 55	* X11000	.16-.23
27825	* X11260	1.8	40 - 55	* X11000	.16-.23
27854	* X11260	1.8	40 - 55	* X11000	.16-.23
58001	* X11260	1.8	40 - 55	* X11000	.16-.23
58002	* X11260	1.8	40 - 55	* X11000	.16-.23
58003	* X11260	1.8	40 - 55	* X11000	.16-.23
58004	* X11260	1.8	40 - 55	* X11000	.16-.23
58006	* X11260	1.8	40 - 55	* X11000	.16-.23
58007	* X11260	1.8	40 - 55	* X11000	.16-.23
58008	* X11260	1.8	40 - 55	* X11000	.16-.23
58009	* X11260	1.8	40 - 55	* X12508	.16-.20
58010	* X11260	1.8	40 - 55	* X12508	.16-.20
58011	* X11260	1.8	40 - 55	* X12508	.16-.20
58012	* X11260	1.8	40 - 55	* X12508	.16-.20
58013	* X11260	1.8	40 - 55	* X12508	.16-.20
58015	* X11260	1.8	40 - 55	* X12508	.16-.20
58016	* X11260	1.8	40 - 55	* X11000	.16-.23
58017	* X11260	1.8	40 - 55	* X11000	.16-.23
70001	* X11260	1.8	40 - 55	* X11000	.16-.23
70002	* X11260	1.8	40 - 55	* X11000	.16-.23
70006	* X11260	1.8	40 - 55	* X12508	.16-.20
70007	* X11260	1.8	40 - 55	* X11000	.16-.23
70008	* X11260	1.8	40 - 55	* X11000	.16-.23
70009	* X11260	1.8	40 - 55	* X12508	.16-.20
70010	* X11260	1.8	40 - 55	* X12508	.16-.20
70012	* X11260	1.8	40 - 55	* X12508	.16-.20
70013	* X11260	1.8	40 - 55	* X12508	.16-.20
61001	* X13313	1.8	50 - 60	* X13299	.16-.20
61002	* X13313	1.8	50 - 60	* X13299	.16-.20
82001	* X13313	1.8	50 - 60	* X13299	.16-.20
82002	* X13313	1.8	50 - 60	* X13299	.16-.20

## CHRYSLER (FORMERLY WEST BEND INDUSTRIAL ENGINES Cont'd)

Motor Model No.	Wico Coil No.	Operating Amp.	Coil Continuity Min.-Max.	Wico Cond. No.	Cond. Cap. Mfd.
2700	X7467	1.80	30 - 50	X7461	.10 - .15
2704	X7467	1.80	30 - 50	X7461	.10 - .15
2706	*X9055	2.10	40 - 50	X8959	.16 - .20
2723	*X9055	2.10	40 - 50	X8959	.16 - .20
2726	X11260	1.75	30 - 50	X11000	.16 - .20
2727	X11260	1.75	30 - 50	X11000	.16 - .20
2728	X11260	1.75	30 - 50	X11000	.16 - .20
2729	X11260	1.75	30 - 50	X11000	.16 - .20
2730	X11260	1.75	30 - 50	X11000	.16 - .20
2731	X11260	1.75	30 - 50	X11000	.16 - .20
2732	X11260	1.75	30 - 50	X11000	.16 - .20
2733	X11260	1.75	30 - 50	X11000	.16 - .20
2734	X11260	1.75	30 - 50	X11000	.16 - .20
2735	X11260	1.75	30 - 50	X11000	.16 - .20
2736	X11260	1.75	30 - 50	X11000	.16 - .20
2738	X11260	1.75	30 - 50	X11000	.16 - .20
2740	X11260	1.75	30 - 50	X11000	.16 - .20
2742	X11260	1.75	30 - 50	X11000	.16 - .20
2744	X11260	1.75	30 - 50	X11000	.16 - .20
2752	X7536	1.90	38 - 58	X7529	.16 - .20
2756	*X9055	2.10	35 - 55	X9100	.26 - .30
27562	X11260	1.75	30 - 50	X11000	.16 - .20
2770	X7536	1.90	38 - 58	X9100	.26 - .30
2770	*X9055	2.10	35 - 55	X9100	.26 - .30
2771	*X9055	2.10	35 - 55	X9100	.26 - .30
27712	X11260	1.75	30 - 50	X11000	.16 - .20
2772	X7536	1.90	38 - 58	X9100	.26 - .30
2772	*X9055	2.10	35 - 55	X9100	.26 - .30
2772	X11260	1.75	30 - 50	X11000	.16 - .20
27722	X11260	1.75	30 - 50	X11000	.16 - .20
2774	X7536	1.90	38 - 58	X9100	.26 - .30
2774	*X9055	2.10	35 - 55	X9100	.26 - .30
2774	X11260	1.75	30 - 50	X11000	.16 - .20
27742	X11260	1.75	30 - 50	X11000	.16 - .20
2775	*X9055	2.10	35 - 55	X9100	.26 - .30
2777	X7467	1.80	30 - 50	X7461	.10 - .15
2778	*X9055	2.10	35 - 55	X9100	.26 - .30
2778-1	*X9055	2.10	35 - 55	X9100	.26 - .30
2779	*X9055	2.10	35 - 55	X9100	.26 - .30
2780	*X9055	2.10	35 - 55	X9100	.26 - .30
2781	*X9055	2.10	35 - 55	X9100	.26 - .30
2782	*X9055	2.10	35 - 55	X9100	.26 - .30
2783	*X9055	2.10	35 - 55	X9100	.26 - .30
2784	*X9055	2.10	35 - 55	X9100	.26 - .30
2785	*X9055	2.10	35 - 55	X9100	.26 - .30
27852	X11260	1.75	30 - 50	X11000	.16 - .20
2786	*X9055	2.10	35 - 55	X9100	.26 - .30
2787	*X9055	2.10	35 - 55	X9100	.26 - .30
2788	*X9055	2.10	35 - 55	X9100	.26 - .30
2788	X11260	1.75	30 - 50	X11000	.16 - .20

\* Replace with Wico Coil No. X9692.

CLINTON ENGINE CORPORATION  
ENGINE DIVISION COIL SPECIFICATIONS

Coil No.	Operating Amperage	Secondary Continuity Min. Max.
135-17-500 (P-5502) . . . . .	2.8 . . . . .	36 - 56
135-167 (P-5509) . . . . .	2.8 . . . . .	40 - 60
135-19-500 (P-5531) . . . . .	2.8 . . . . .	40 - 60
135-169 (P-5538) . . . . .	2.8 . . . . .	36 - 60
135-2-500 (P-5545) . . . . .	2.8 . . . . .	36 - 60
135-22-500 (P-5563) . . . . .	2.2 . . . . .	50 - 70
135-23-500 (P-5593B) . . . . .	2.8 . . . . .	35 - 60
135-10-500 (P-5733) . . . . .	2.8 . . . . .	40 - 60
135-13-990 (P-5770) . . . . .	2.8 . . . . .	40 - 60

CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading in Microfarads Min. Max.
135-24 (P-2053) . . . . .	.12- .16
135-151 (P-3416) . . . . .	.15- .19
135-27-500 (P-5549) . . . . .	.22- .27
135-29-990 (P-5589 & P-5736) . . . . .	.15- .19
135-30-500 (P-5599) . . . . .	.15- .19
135-26 (P-7219) . . . . .	.12- .16

CLINTON SAW & OUTBOARD DIVISION  
COIL SPECIFICATIONS

Coil No.	Operating Amperage	Secondary Continuity Min. Max.
135-2-500 (P-513) . . . . .	2.8 . . . . .	40 - 60
135-8-500 (P-400467) . . . . .	2.8 . . . . .	40 - 60
135-23-500 (P-400789) . . . . .	2.8 . . . . .	40 - 60
158-321-500 (P-700343) . . . . .	2.8 . . . . .	40 - 60

CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading in Microfarads Min. Max.
135-24 (P-261) . . . . .	.12- .16
135-29-990 (P-400777) . . . . .	.15- .19
135-241-500 (P-700344) . . . . .	.12- .16

## COMMODORE

\* Wico

\*\* Fairbanks-Morse

Motor Model No.	H. P.	Year	Coil No.	Operating Amp.	Continuity Min.-Max.	Cond. No.	Cond. Capacity Microfarads
23201	2	1961 & 1962	* X12660	1.8	40 - 55	* X12174	.16-.20
73201	7-1/2	1961 & 1962	* X11406	2.1	40 - 60	* X11397	.16-.20
103201	10	1961 & 1962	* X11406	2.1	40 - 60	* X11397	.16-.20
183201	18	1961 & 1962	* X12302	2.2	40 - 55	* X12303	
403201	40	1961 & 1962	** LX2477	1.5	40 - 60	** S2433	.28-.32

CONTINENTAL MOTORS  
COIL SPECIFICATIONS

Coil No.	Manufacturer's No.	Operating Amperage	Continuity Min. Max.
AA7M3260 ...	Smith .....	1.30 .....	30 - 50
X6111 .....	.....	1.60 .....	
AA7M2210 ...	AA7M3260 .....	1.30 .....	30 - 50
X6718 .....	.....	1.80 .....	
X7536 .....	.....	1.90 .....	38 - 58
X7680 .....	.....	1.80 .....	
FG-463B .....	.....	2.80 .....	40 - 60

CONTINENTAL MOTORS  
CONDENSER SPECIFICATIONS

Condenser No.	Capacity Microfarads
AA7-M-2980 .....	.225-.275

CUSHMAN MOTORS

Coil No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.	Condenser No.	Capacity Microfarads Min. Max.
580346	1.5	.4- .6	40 - 50	510478	.33- .41
580380	1.0	.6- .8	70 - 80	510613	.18- .22
580600	.75	.9- .15	60 - 70		

DELCO-REMY IGNITION COIL SPECIFICATIONS

Coil No.	Type	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
1115153	Battery	.9	1.65-1.95	50 - 60
1115032		.5	3.9 -4.3	48 - 58
1115106		.9		55 - 65
1115043		.55	3.5 -4.5	39 - 49

DELCO-REMY CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading in Microfarads Min. Max.
1869704	.18- .23
1869705	.18- .23
1869706	.18- .23
1871678	.18- .23
1882239	.29- .34
1900272	.18- .23
1928111	.18- .23
1932004	.18- .23
1942948	.18- .23
1965489	.18- .23

EATON - VOLVO 110 AQUAMATIC

Coil No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.	Condenser No.	Capacity Microfarads Min. Max.
TK12A3	.6	3.2- 3.6	50 - 60		
200691					
1000281	.57	3.5- 3.9	55 - 65		
6024					
200692 (Presolite)	.7	1.1- 1.5	55 - 65	238852	.21- .28
1000193 (Eaton)					
Resistor No.	Resistance Min. Max.				
201016	.49- .55				

### ECHLIN CONDENSER SPECIFICATIONS

Cond. No.	Capacity Mfd.	Cond. No.	Capacity Mfd.
13-200 .....	.30-.36	29-200 .....	.18-.22
13-201 .....	.22-.25	29-201 .....	.30-.36
13-202 .....	.22-.25	37-200 .....	.17-.21
13-203 .....	.22-.25	37-201 .....	.17-.21
13-204 .....	.22-.25	73-200 .....	.17-.21
13-205 .....	.30-.36		
25-200 .....	.18-.21		
25-201 .....	.18-.22		

### EDISON-SPLITDORF COIL SPECIFICATIONS

Coil No.	Type	Maximum Amperage
EX 4161 .....	M1 & 2, AE2 .....	1.70
EX 6178 .....	R .....	1.35
EX 6406 .....	RM4, RMG2 .....	1.40
EX 6435 .....	RM1, RM2 .....	1.40
EX 6951 .....	RMP-4 VAR .....	1.40
EX 6991 .....	RM-2, RMP-2 .....	1.40
EX 7746 .....	C4, C6, CO .....	1.35
EX 23263 .....	601, 700-702 .....	2.00
EX 23579 .....	235 .....	1.45
EX 33740 .....	GH1 .....	1.00
EX 33795 .....	GH2 .....	1.00
EX 36034 .....	All Dixie .....	1.90
EX 36161 .....	648T .....	1.55
EX 50060 .....	S1, 2, 4, SPO, SPI .....	1.10
EX 50643 .....	NS1 .....	1.10
EX 51116 .....	NS2, NS4 .....	1.25
EX 51432 .....	C2 .....	1.10
EX 51446 .....	CDH .....	1.20
EX 53315 .....	K4 .....	1.40
EX 60025 .....	SSO .....	1.20
EX 60060 .....	SS4-6 .....	1.10
EX 62190 .....	SS6-2 (Firing 2 Sparks) .....	1.50
EX 63585 .....	B2, B3, B4, B6 .....	1.20
EX 72080 .....	AJ1 .....	2.35
EX 72223 .....	AJ2 .....	2.35
EX 72288 .....	AJ1 & 2 .....	2.00

## EISEMANN FLYWHEEL MAGNETO COIL SPECIFICATIONS

## COMPLETE STATOR

## COIL &amp; CORE ASSEMBLY

Model Magneto	Principal User	Part No.	Amperage On		Part No.	Amperage On	
			Round Core	Square Core		Round Core	Square Core
51-A .....	Muncie .....	H23-495	---	1.90	H23-460	---	1.60
51-B .....	Sears .....	H23-499	---	1.90	H23-460	---	1.60
51-C .....	Sears .....	H23-454	---	1.90	H23-460	---	1.60
51-D .....	Sears .....	H23-538	---	1.90	H23-460	---	1.60
51-E .....	Clarke .....	H24-031	---	1.90	H23-460	---	1.60
51-F .....	Homelite .....	H24-701	---	1.90	H24-703	---	1.60
51-FS .....	Homelite .....	H26-662	---	1.90	H24-703	---	1.60
51-G .....	Sears .....	H24-833	---	1.90	H23-460	---	1.60
51-H .....	Sears .....	H24-831	---	1.90	H23-460	---	1.60
51-J .....	Muncie .....	H24-813	---	1.90	H23-460	---	1.60
51-K .....	Chic. Pneum. ....	H27-640	---	1.90	H23-460	---	1.60
51-KA .....	Gary Steel .....	H27-640	---	1.90	H23-460	---	1.60
51-M .....	Homelite .....	H27-349	---	1.90	H23-460	---	1.60
61-A .....	Lauson .....	H23-007	1.95	1.75	H23-010	1.70	1.50
	Latter Edition .....	H23-007	---	1.75	H24-820	---	1.50
61-B .....	Muncie .....	H23-034	2.00	1.80	H23-010	1.70	1.50
	Latter Edition .....	H23-034	---	1.75	H24-820	---	1.50
61-C .....	Sears .....	H23-072	2.00	1.80	H23-010	1.70	1.50
	Latter Edition .....	H23-072	---	1.75	H24-820	---	1.50
61-D, DA .....	Lauson .....	H23-231	---	1.75	---	---	---
61-DAG .....	Lauson .....	H24-712	---	1.75	---	---	---
61-DAL .....	Lauson .....	H24-239	---	1.75	---	---	---
61-DC .....	Jacobsen .....	H23-231	---	1.75	---	---	---
61-DD .....	Reo Motors .....	H23-231	---	1.75	---	---	---
61-E .....	Champion .....	H24-023	1.95	1.75	H23-010	1.70	1.50
		---	---	1.75	H24-820	---	1.50
61-F .....	Muncie .....	H24-793	---	1.75	H24-820	---	1.50

NOTE: Coils such as the H27-894 can only be tested in assembly with the laminated core or complete stator assembly.

## EISEMANN FLYWHEEL MAGNETO COIL SPECIFICATIONS (Cont'd)

## COMPLETE STATOR

## COIL &amp; CORE ASSEMBLY

Model Magneto	Principal User	Part No.	Amperage On		Part No.	Amperage On	
			Round Core	Square Core		Round Core	Square Core
61-G . . . . .	Sears . . . . .	H24-879	----	1.75	H24-820	----	1.50
61-GL . . . . .	Sears . . . . .	H24-801	----	1.75	H24-820	----	1.50
61-H . . . . .	Mtgy.-Ward . . . . .	H24-793	----	1.75	H24-820	----	1.50
61-J . . . . .	Metal Prod. . . . .	H27-659	----	1.90	H26-034	----	1.60
61-K . . . . .	Kiekhaefer . . . . .	H24-838	----	1.75	H24-820	----	1.50
61-M . . . . .	Scott-Alwater . . . . .	H24-879	----	1.75	H24-820	----	1.50
62-A . . . . .	Muncie . . . . .	H26-028	----	1.90	H26-034	----	1.60
62-B . . . . .	Metal Prod. . . . .	H27-645	----	1.90	H26-034	----	1.60
62-D . . . . .	Lauson . . . . .	H27-932	----	2.20	-----	----	-----
71-A . . . . .	Muncie . . . . .	H21-806	1.95	----	H21-808	1.75	----
71-AA . . . . .	Muncie . . . . .	H22-222	1.95	----	H21-808	1.75	----
71-B . . . . .	Eisemann . . . . .	H27-894	1.9	----	-----	-----	-----
71-C . . . . .	Ideal . . . . .	H21-851	1.95	----	H21-808	1.75	----
71-D . . . . .	Wisconsin . . . . .	H21-915	1.95	----	H21-808	1.75	----
71-E . . . . .	Toro . . . . .	H22-032	1.95	----	H21-808	1.75	----
71-F . . . . .	Muncie . . . . .	H21-938	1.95	----	H21-808	1.75	----
71-G . . . . .	Toro . . . . .	H21-984	1.25	----	H21-808	1.10	----
71-H . . . . .	Cushman . . . . .	H21-996	1.25	----	H21-967	1.10	----
71-I, M, O . . . . .	Muncie . . . . .	H22-375	1.25	----	H21-808	1.10	----
71-J . . . . .	Cushman . . . . .	H23-128	1.25	----	H21-808	1.10	----
71-K . . . . .	Onan . . . . .	H22-063	1.25	----	H21-808	1.10	----
71-L . . . . .	Muncie . . . . .	H22-142	1.25	----	H21-808	1.10	----
71-LE . . . . .	Champion . . . . .	H22-423	1.25	----	H21-808	1.10	----
71-M . . . . .	Simplex . . . . .	H23-181	1.25	----	H21-808	1.10	----
71-N . . . . .	Cushman . . . . .	H23-128	----	1.25	H21-808	-----	1.10
71-O . . . . .	Cushman . . . . .	H23-150	1.25	----	H21-967	1.10	----
		H23-128	----	1.25	H21-808	-----	1.10

NOTE: Coils such as the H27-894 can only be tested in assembly with the laminated core or complete stator assembly.

## EISEMANN FLYWHEEL MAGNETO COIL SPECIFICATIONS (Cont'd)

Model Magneto	Principal User	COMPLETE STATOR			COIL & CORE ASSEMBLY		
		Part No.	Round Core	Amperage On Square Core	Part No.	Round Core	Amperage On Square Core
71-P	Cushman	H23-218	1.25	---	H21-967	1.10	---
71-R	Lauson	H23-408	---	1.75	---	---	---
71-RL	Lauson	H24-230	---	1.75	---	---	---
71-RG	Lauson	H24-742	---	1.75	---	---	---
71-S-1-2-3	Nelson, Lauson, Mall Tool	H24-006	---	1.75	H24-004	---	1.50
71-T	Toro	H24-865	---	1.75	---	---	---
71-TA	Gladden Prod.	H24-865	---	1.75	---	---	---
72-A	Muncie	H23-046	2.00	---	H23-049	1.70	---
72-B	Champion	H23-114	2.00	---	H23-049	1.70	---
72-C	Sears	H23-106	2.00	---	H23-049	1.70	---
72-D	Maytag	H23-308	---	1.90	H23-330	---	1.60
72-DA	Maytag	H27-275	---	1.90	H27-277	---	1.60
72-E	Muncie	H24-842	---	1.75	H24-004	---	1.50
72-F	Muncie	H24-852	---	1.75	H24-856	---	1.50
72-H	Western Auto-Kiekhaefer	H24-873	---	1.75	H24-004	---	1.50
72-J	Sears	H24-913	---	1.90	H24-929	---	1.60
82-D	Muncie	H21-824	1.75	---	H21-759	1.55	---
82-DA	Cross Gear	H21-882	1.75	---	H21-759	1.55	---
82-D, DA	Muncie	H21-824	---	1.75	H21-759	---	1.55
82-F	Muncie	H21-824	---	1.75	H21-759	---	1.55
	Eisemann	H27-894-L-P	1.9	---	---	---	---

NOTE: Coils such as the H27-894 can only be tested in assembly with the laminated core or complete stator assembly.

## EISEMANN CONDENSER

Part No.	Capacity Microfarad
24235	.19 - .23

### EISEMANN MAGNETOS COILS

Part No.	Model Used on or Type	Operating Amperage	Secondary Continuity Min. Max.
H27-958 . . . . .	All AM & LA models . . . . .	1.35 . . . . .	40 - 60
H27-959 . . . . .	All models with H26-958 com. . . . .	1.80 . . . . .	40 - 60
H28-030 . . . . .	RC & RT models . . . . .	1.25 . . . . .	45 - 65
H27-940 . . . . .	All 51 series except 51F, & FS. . . . . 61J, 62A & B	1.9 . . . . .	35 - 55
H24-704 . . . . .	51F & FS . . . . .	1.9 . . . . .	35 - 55
H27-927 . . . . .	62D . . . . .	2.2 . . . . .	35 - 55
H27-894 . . . . .	All-61 series except 61J . . . . . & 61NA, 71R, RL, RG, S1, S2, S3, T, TA, 72E & H	1.75 . . . . .	35 - 55
H28-015 . . . . .	72A, B, C, (D, DA, & F.) . . . . .	2.0 . . . . .	40 - 60
H28-015 . . . . .	72D & DA . . . . .	1.9 . . . . .	40 - 60
H28-015 . . . . .	72F . . . . .	1.75 . . . . .	40 - 60

### EISEMANN MAGNETO CONDENSER

Part No.	Capacity Reading In Microfarads Min. - Max.
H22-910 . . . . .	.17-.22
H23-470 . . . . .	.17-.22
H24-235 . . . . .	.17-.22
H24-924 . . . . .	.17-.22
H26-982 . . . . .	.17-.22
H28-090 . . . . .	.17-.22

## FAIRBANKS-MORSE COIL SPECIFICATIONS

Coil No.	Type	Primary Operating Amperage	Secondary Resistance	Continuity
			Min. Max.	Min. Max.
**A2477	RVI	1.55		
*A2477	RVI	2.40		
A2477A	FMJE1	1.60		
A2477C		1.80		35 - 55
A2480	R2 (Wound Armature)	1.80		
*B2477	RV4-6, DRV	2.10		
B2477A	FJMHE2	1.55		
B2480A	R (Wound Armature)	1.80		
BX2477	FMSC1B70	1.70		
C2477	FM-FMK-FMH-FMO-FMOK-FMOH	1.55		
C2477A	FMJFE2-FMJE4-FMJG4	1.55		
C2477AX	FMJE4	1.55		
D2477	RSI-FM1B	1.55		
DX2477C		1.25		40 - 60
E2477	FMJ4A-FMJ4B	1.70		40 - 60
EX2477C		1.40		40 - 60
F2477	FMT4B (Battery Ignition with Bridge Laminations)	1.40		40 - 60
FX2477		1.90		50 - 60
G2477	FMJ4A-FMJ4B	1.55		
GX2477C		1.70		40 - 60
H2477	FMJV4-FMJVE4	1.70		40 - 60
H2477C		1.90		45 - 65
HX2477		1.90		50 - 60
J2477	FMO1	1.55		
JX2477		2.00		40 - 60
K2477	FMO-FMOH	1.55		
L2477	FMJ1	1.80		35 - 55
L2477C		1.80		35 - 55
L2477X	FMJ1A	1.60		
LX2477C		1.50		40 - 60
M2477	FMJ1A2	1.55		
P2477		1.55		40 - 60
P2477C		1.60		40 - 60
***Q2477C	Double Secondary Leads	1.70		50 - 70
Q2477C		1.70		50 - 70
Q2477CX		1.70		50 - 70
QP2477C		1.70		50 - 70
QR2477C		1.70		50 - 70
QS2477C		1.65		45 - 65
QT2477C		1.70		45 - 65
QW2477C		1.70		50 - 70
QX2477C		1.70		50 - 70
QY2477C		2.30		45 - 60
QZ2477C		1.70		50 - 70
R2477C		1.70		40 - 60
RS2477C		1.70		40 - 60
S2477C		1.90		45 - 65
T2477	FMXV4B70	1.80		40 - 60
T2477C		1.80		35 - 55
TX2477		1.5 .62- .68		45 - 55
U2477		1.70		50 - 60
U2477C		1.60		40 - 60
X2477		1.5 .62- .68		45 - 55

\*Bakelite Housing Coil. \*\*Tape Wound. \*\*\*See page 23, fig. 26, connect 1-secondary lead with 1-primary lead.

## FAIRBANKS-MORSE CONDENSER CAPACITIES SPECIFICATIONS

Condenser No.	Capacity Reading in Microfarads		
		Min.	Max.
AX2433 . . . . .	.17-.23		
AX-M-R2433 . . . . .	.18-.23		
BX2433 . . . . .	.16-.19		
CX2433 . . . . .	.28-.36		
DX2433 . . . . .	.28-.36		
EX2433 . . . . .	.17-.23		
FX2433 . . . . .	.28-.36		
GX2433 . . . . .	.16-.19		
HX2433 Feed Through . . . . .	.37-.43		
JX2433 . . . . .	.17-.23		
K2433 . . . . .	.16-.24		
KX2433 . . . . .	.28-.35		
LV2433 . . . . .	.38-.43		
M2433 . . . . .	.17-.23		
MX2433 . . . . .	.28-.35		
PX2433 . . . . .	.28-.35		
QX2433 . . . . .	.28-.35		
R2433 . . . . .	.17-.23		
RX2433 . . . . .	.37-.42		
S2433 . . . . .	.28-.32		
SXY2433 . . . . .	.28-.33		
SYX2433X . . . . .	.28-.36		
TX2433 . . . . .	.28-.35		
WX2433 . . . . .	.28-.35		
X2433 . . . . .	.28-.36		
Y2433 . . . . .	.28-.36		

## GALE PRODUCTS - BUCCANEER

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Capacity Microfarads
12D11B	12	1954-55	580153	580416	1.7	30 - 40	580321	.18-.22
12S12B	12	1956	580207	580416	1.7	30 - 40	580321	.18-.22
12D13B	12	1956	580207	580416	1.7	30 - 40	580321	.18-.22
12D14B	12	1956	580207	580416	1.7	30 - 40	580321	.18-.22
12DE13B	12	1956	580207	580416	1.7	30 - 40	580321	.18-.22
12S13B	12	1957	580207	580416	1.7	30 - 40	580321	.18-.22
12S14B	12	1957	580207	580416	1.7	30 - 40	580321	.18-.22
12D15B	12	1957	580207	580416	1.7	30 - 40	580321	.18-.22
12D16B	12	1957	580207	580416	1.7	30 - 40	580321	.18-.22
12DE15B	12	1957	580207	580416	1.7	30 - 40	580321	.18-.22
12S15B	12	1958	580207	580416	1.7	30 - 40	580321	.18-.22
12D17B	12	1958	580254	580416	1.7	30 - 40	580321	.18-.22
12D18B	12	1959	580254	580416	1.7	30 - 40	580321	.18-.22
22D10B	22	1955	580180	580416	1.7	30 - 40	580321	.18-.22
22DE10B	22	1955	580180	580416	1.7	30 - 40	580321	.18-.22
22D12B	22	1955	580180	580416	1.7	30 - 40	580321	.18-.22
22DE12B	22	1955	580180	580416	1.7	30 - 40	580321	.18-.22
22D11B	25	1956	580209	580416	1.7	30 - 40	580321	.18-.22
22DE11B	25	1956	580209	580416	1.7	30 - 40	580321	.18-.22
22D13B	25	1956	580209	580416	1.7	30 - 40	580321	.18-.22
22DE13B	25	1956	580209	580416	1.7	30 - 40	580321	.18-.22
22D14B	25	1957	580209	580416	1.7	30 - 40	580321	.18-.22
22DE14B	25	1957	580209	580416	1.7	30 - 40	580321	.18-.22
22D15B	25	1958	580274	580416	1.7	30 - 40	580321	.18-.22

## GALE PRODUCTS - BUCCANEER (Cont'd)

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Capacity Microfarads
22DE15B	25	1958	580274	580416	1.7	30 - 40	580321	.18-.22
22D16B	25	1959	580274	580416	1.7	30 - 40	580321	.18-.22
22DE16B	25	1959	580274	580416	1.7	30 - 40	580321	.18-.22
35DE10B	35	1958	580333	580197	1.4	42 - 52	580321	.18-.22
35D11B	35	1959	580333	580197	1.4	42 - 52	580321	.18-.22
35DE11B	35	1959	580333	580197	1.4	42 - 52	580321	.18-.22
35D12B	35	1959	580333	580197	1.4	42 - 52	580321	.18-.22
35DE12B	35	1959	580333	580197	1.4	42 - 52	580321	.18-.22

## GALE PRODUCTS - BUCCANEER (Cont'd)

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity No.	Condensor No.	Capacity	
3D16	3	1960	580128	580416	1.7	30 - 45	580321	.18-.22	
5D17	5	1960	580206	580416	1.7	30 - 45	580321	.18-.22	
15D10	15	1960	580270	580197	1.4	42 - 52	580422	.25-.29	
25D17	25	1960	580274	580416	1.7	30 - 45	580321	.18-.22	
25DE17	25	1960	580274	580416	1.7	30 - 45	580321	.18-.22	
35D13	35	1960	580307	580197	1.4	42 - 52	580422	.25-.29	
35DE13	35	1960	580307	580197	1.4	42 - 52	580422	.25-.29	
60D10	60	1960	580319	580243	1.7	40 - 55	580256	.37-.41	
60DE10	60	1960	580319	580243	1.7	40 - 55	580256	.37-.41	
79	3D17	3	1961	580128	580416	1.7	40 - 55	580321	.18-.22
	5D18	5	1961	580206	580416	1.7	40 - 55	580321	.18-.22
	5D19	5	1961	580206	580416	1.7	40 - 55	580321	.18-.22
	5D21	5	1961	580206	580416	1.7	40 - 55	580321	.18-.22
	15D11	15	1961	580270	580197	1.4	42 - 52	580422	.25-.29
	15D12	15	1961	580270	580197	1.4	42 - 52	580422	.25-.29
	25D18	25	1961	580274	580416	1.7	30 - 45	580321	.18-.22
	25DE18	25	1961	580274	580416	1.7	30 - 45	580321	.18-.22
	25D20	25	1961	580274	580416	1.7	30 - 45	580321	.18-.22
	25DE20	25	1961	580274	580416	1.7	30 - 45	580321	.18-.22
	40DT4	40	1961	580333	580197	1.4	42 - 52	580321	.18-.22
	40DE14	40	1961	580333	580197	1.4	42 - 52	580321	.18-.22
	60D11	60	1961	580319	580243	1.7	40 - 55	580256	.37-.41
	60DE11	60	1961	580319	580243	1.7	40 - 55	580256	.37-.41
	60D12	60	1961	580319	580243	1.7	40 - 55	580256	.37-.41
	60DE12	60	1961	580319	580243	1.7	40 - 55	580256	.37-.41

## GALE PRODUCTS - BUCCANEER (Cont'd)

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity No.	Condensor No.	Capacity
3D18	3	1962	580128	580416	1.7	30 - 45	580321	.18-.22
5D20	5	1962	580206	580416	1.7	30 - 45	580321	.18-.22
15DI3	15	1962	580434	580416	1.7	30 - 45	580422	.25-.29
15D14	15	1962	580254	580416	1.7	30 - 45	580321	.18-.22
25D19	25	1962	580274	580416	1.7	30 - 45	580321	.18-.22
25DE19	25	1962	580274	580416	1.7	30 - 45	580321	.18-.22
40D15	40	1962	580415	580416	1.7	30 - 45	580422	.25-.29
40DE15	40	1962	580415	580416	1.7	30 - 45	580422	.25-.29
60DE13	60	1962	580319	580243	1.7	40 - 55	580256	.37-.41
60DG13	60	1962	580319	580243	1.7	40 - 55	580256	.37-.41

GALE PRODUCTS-OMC COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
425371	1.9		38 - 58
425960	2.10		30 - 50
470187- ①	1.8		40 - 55
470187- ②	1.7		50 - 60
470685- ③	1.4	.5 - .7	40 - 55
470685- ④	1.8	.47 - .55	30 - 40
580454	1.4	.4 - .6	30 - 40

CONDENSER SPECIFICATIONS

Condenser No.	Capacity Microfarads Min. Max.
425369	.16 - .20
425373	.16 - .20
425702	.16 - .20
426528	.18 - .22

## GAMBLE HIAWATHA

Year	Model No.	HP	Coil Number			Oper. Amp.	Prim. Res. Min. Max.	Sec. Cont. Min. Max.	Condenser No.		Capacity Micro-farads
			Make	Mfg.	Scott				Mfg.	Scott	
1959	143A	7.5	Phelon	FG3689	138-134	2.5		40 - 60	FG3693	138-115	.15-.19
	148A	10	Phelon	FG3689	138-134	2.5		40 - 60	FG3693	138-115	.15-.19
	145A	25	McC		736-232	1.6		43 - 55	FG3478	1436-115	.18-.22
	345A	25	McC		736-232	1.6		43 - 55	FG3478	1436-115	.18-.22
	346A	40	McC		736-232	1.6		43 - 55	FG3478	1436-115	.18-.22
1960	A4BB	3.6	Phelon	FG3689	138-134	2.5		40 - 60	FG3693	138-115	.15-.19
	A4EB	7.5	McC		134-134	1.9		30 - 45	X12293	134-115	.18-.22
	C4EB	7.5	McC		134-134	1.9		30 - 45	X12293	134-115	.18-.22
	A4FB	12	Phelon	FG4128	139-134	2.5		40 - 60	FG3693	138-115	.15-.19
	A4GB	25	Wico	X11352	3685-113	2.0		40 - 60	X11362	3685-115	.26-.30
	C4GB	25	McC		4368-134	1.4		40 - 60	X12264	335B-115	.26-.30
	D4GB	25	McC		4368-134	1.4		40 - 60	X12264	335B-115	.26-.30
	C4HB	40	McC		3368-134	1.4		40 - 60	X12264	335B-115	.26-.30
	D4HB	40	McC		3368-134	1.4		40 - 60	X12264	335B-115	.26-.30
	C4JB	60	McC		C3JB-134	1.4	.55-.85	45 - 55	X12265	332B-115	.26-.30
1961	D4JB	60	McC		C3JB-134	1.4	.55-.85	45 - 55	X12264	332B-115	.26-.30
	61400310	3.6	Phelon	FG3689	138-134	2.5		40 - 60	FG3693	138-115	.15-.19

## GOODYEAR'S - "SEA BEE"

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Capacity Microfarads
025-3574	3	1954-55	580128	580118	1.6	30 - 40	510173	.18-.22
025-3574 (3D12G)	3	1955	580128	580118	1.6	30 - 40	510173	.18-.22
225-3606 (3D13G)	3	1956	580128	580118	1.6	30 - 40	510173	.18-.22
225-3612 (3D14G)	3	1957	580128	580118	1.6	30 - 40	510173	.18-.22
225-3619 (3619)	3	1958-59	580128	580118	1.6	30 - 40	510173	.18-.22
025-3602 (5S11G)	5	1955	580120	580118	1.6	30 - 40	510173	.18-.22
025-3603 (5D11G)	5	1955	580183	580118	1.6	30 - 40	510173	.18-.22
225-3607 (5S12G)	5	1956	580120	580118	1.6	30 - 40	510173	.18-.22
225-3608 (5D12G)	5	1956	580182	580118	1.6	30 - 40	510173	.18-.22
225-3608 (5D13G)	5	1956	580182	580118	1.6	30 - 40	510173	.18-.22
225-3613 (5S13G)	5	1957	580120	580118	1.6	30 - 40	510173	.18-.22
225-3614 (5D14G)	5	1957	580182	580118	1.6	30 - 40	510173	.18-.22
225-3620	5	1958	580120	580118	1.6	30 - 40	510173	.18-.22
225-3621	5	1958	580206	580118	1.6	30 - 40	510173	.18-.22
225-3450	5	1959	580206	580118	1.6	30 - 40	510173	.18-.22
25-3572	12	1954-55	580153	580118	1.6	30 - 40	510173	.18-.22
225-3609 (12D13G)	12	1956	580207	580118	1.6	30 - 40	510173	.18-.22
225-3609 (12D14G)	12	1956	580207	580118	1.6	30 - 40	510173	.18-.22
225-3615 (12D15G)	12	1957	580207	580118	1.6	30 - 40	510173	.18-.22
225-3615 (12D16G)	12	1957	580207	580118	1.6	30 - 40	510173	.18-.22
226-3622	12	1958	580254	580118	1.6	30 - 40	510173	.18-.22
225-3451	12	1959	580254	580118	1.6	30 - 40	510173	.18-.22
25-3604 (22D10G)	22	1955	580180	580118	1.6	30 - 40	510173	.18-.22
25-3605 (22DE10G)	22	1955	580180	580118	1.6	30 - 40	510173	.18-.22
25-3604 (22E12G)	22	1955	580180	580118	1.6	30 - 40	510173	.18-.22
25-3605 (22DE12G)	22	1955	580180	580118	1.6	30 - 40	510173	.18-.22
225-3610 (22D11G)	25	1956	580209	580118	1.6	30 - 40	510173	.18-.22
225-3610 (22D13G)	25	1956	580209	580118	1.6	30 - 40	510173	.18-.22
225-3611 (22DE11G)	25	1956	580209	580118	1.6	30 - 40	510173	.18-.22
225-3611 (22DE13G)	25	1956	580209	580118	1.6	30 - 40	510173	.18-.22
225-3616 (22D14G)	25	1957	580209	580118	1.6	30 - 40	510173	.18-.22

## GOODYEAR'S - "SEA BEE" (Cont'd)

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Capacity Microfarads
225-3617 (22DE14G)	25	1957	580209	580118	1.6	30 - 40	510173	.18-.22
225-3623	25	1958	580274	580118	1.6	30 - 40	510173	.18-.22
225-3624	25	1958	580274	580118	1.6	30 - 40	510173	.18-.22
225-3452	25	1959	580274	580118	1.6	30 - 40	510173	.18-.22
225-3453	25	1959	580274	580118	1.6	30 - 40	510173	.18-.22
225-3454	35	1959	580275	580197	1.4	42 - 52	510173	.18-.22
225-3455	35	1959	580275	580197	1.4	42 - 52	510173	.18-.22
225-3454A	35	1959	580275	580197	1.4	42 - 52	510173	.18-.22
225-3455A	35	1959	580275	580197	1.4	42 - 52	510173	.18-.22

## HOMELITE COIL SPECIFICATIONS

Coil No.	Mfg.	Mfg. No.	Operating Amperage	Secondary Continuity Min. Max.	Fits Homelite Models
	Wico	X16669	1.3	50 - 60	XLB50
	Wico	X16797	1.8	50 - 60	FWK-2868
	Wico	X16809	1.3	50 - 60	Pump Model 257
55232	Phelon	FG1618	2.8	40 - 60	Old 17
55403	Wico	X9533	2.2	30 - 50	17, 5-20
58874	Wico	X14171	2.1	30 - 50	XL Series
59860	Phelon	FG7049	2.8	61 - 71	XL Series
63625	Wico	X16343	1.3	50 - 60	XL700 & 800
72397	Wico	X7536	1.9	38 - 58	26, 5-30, 7-29

## HOMELITE CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading in Microfarads		Fits Homelite Models
	Min.	Max.	
55233	.15	.19	Old 17
55399	.16	.20	17, 5-20
55987	.18	.22	C-Series, others
58817 approx.	.17	.21	XL Series
59862 approx.	.21	.25	XL Series
63626	.16	.20	XL700 & 800
72396	.30	.34	26, 5-30, 7-29

### HONDA

Model No.	Coil No.	Oper. Amps	Primary Resistance Min., Max.	Secondary Continuity Min., Max.
C100/C110	100-1801.3FND	1.7	.5 - .6	35 - 45
C102	C102-1806ND	1.15	1.4 - 1.6	55 - 65
C200/CT200	C2004806AK	1.15	1.1 - 1.3	65 - 75
C100C110				
C105T Energy Transformer	C110-4806ND	.5	4.4 - 4.6	55 - 65
CB160	CB93-4806ND	.52	3.8 - 4.3	55 - 65
CB72, CB77	CB721806A-ND	.60	3.8 - 4.2	50 - 60
CL72				
C100/C110	C100, 1801, 3KND		Resistance only Min. 1.4 Max. 1.6	
C105T				

All Condensers are rated at Min. .21 and Max. .25.

**NOTE:** When testing Coil (C110-4806AK) disconnect the Internal Battery and connect Analyzer Leads to a 12 volt storage battery attaching our part no. 55-174 Suppressor in series with one side of the Battery Lead. Do not use the 12 volts for any other tests.

## INTERNATIONAL HARVESTER COIL SPECIFICATIONS

Coil No.	Type	Operating Amperage
E4329A.....	E4A-E4B-E4C.....	1.20
21401D.....	F4 (With Core) .....	2.10
21401D.....	F6 (With Core) .....	2.10
.....	H1-H4 .....	2.10

## JOHN DEERE TRACTOR WORKS

Coil No.	Mfg.	Operating Amperage	Primary Resistance Min., Max.	Secondary Continuity Min., Max.
AM31036	Delco #1115043	.55	3.5 - 4.5	39 - 48
John Deere Model #VH60	Lauson 30560	1.5	.46 - .56	50 - 60

**OMC-EVINRUDE & JOHNSON MAGNETO  
& BATTERY COIL SPECIFICATIONS**

Coil No.	Type	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
72-110	Old A25	2.30		
72-582	A25 to 50, AZ35 to 45	2.40		30 - 60
72-641	P30-P35-P45-TR40-P40	2.00		45 - 65
72-669	K35-K40-K45	2.40		30 - 60
72-749	F1036	1.90		
72-792	A25 to 50, AZ35 to 45	2.10		30 - 60
72-808	S45-550-SR50-SR55	2.20		
72-813	V45 & up 4 cyl. 2 coils	2.40		30 - 60
72-851	XR55-OK55-60-P50	0.60		65 - 80
72-852	SV & 1-1/4-50 & up, all models	1.00		65 - 80
72-875	A50 & up, K50 & up	1.70		50 - 65
72-947	F70-F75-OA55-OA60-OB	2.00		30 - 60
72-1005	300-36 Twin	2.60		30 - 60
72-1017	Iron Horse	2.40		
72-1018	Iron Horse (All Models)	1.27		30 - 60
72-1045	LT37-LS37-DT37-DS37	2.40		
72-1072	LT, LD, & AT-37 & up	2.31		30 - 60
275-370		1.80		50 - 65
275-540		1.50		65 - 80
276-039		1.80		50 - 65
375-102	SD-10-1940	1.00		50 - 65
***375-189	TS, TD, HS, HD, MS, MD & Later	1.5	.375 - .575	30 - 45
378-231		.8	1.5 - 1.8	60 - 70
378-665	- Resistance on Electromatic Johnson Forward or Reverse		- 7.0-8.0 ohms	
379-519	- Model No. SU & HU - Resistance Min. - 5.0 Max. - 6.0			
379-569		.8	1.5 - 1.65	60 - 70
*381-886		1.3	.12 - .16	8 - 10
*560-688		1.3		16 - 22
580-040		1.60		30 - 40
580-084		1.60		34 - 46
580-118		1.60	.4 - .6	40 - 50
580-197*		1.5	.5 - .6	45 - 55
580-243	50 HP	1.5	.4 - .55	40 - 55
580-380		1.0	.7 - .8	70 - 80
580-416		1.7	.4 - .55	35 - 45
580-527		1.0	.7 - .8	70 - 80
**580-527	(With Loose Pig-Tail Leads)	.6	.7 - .9	65 - 75
****580-602		.6	.7 - .9	65 - 75
Leads Attached with Black or Purple Cement.				
****580-602		.6	2.5 - 3.0	70 - 80
Leads Attached with Dark Purple Cement. Most Engines are using this Coil				

\*To check Coil use C.D. Adaptor #55-980 beginning with Serial No. 325.

\*\*Disconnect internal battery and connect lead to a 12 volt storage battery or equal and connect our part no. 55-174 Suppressor in series with one lead. NOTE: DO NOT USE THE FULL 12 VOLTS ON THIS COIL.

\*\*\*Coils #375-189 with 2-secondary and 2-primary leads, connect 1-secondary lead to 1-primary lead then attach tester leads as shown in figure 26, page 23.

\*\*\*\*Disconnect Internal Battery and connect leads from analyzer to a 12 volt Storage Battery or equal. This test is for COIL POWER TEST only. DO NOT USE THE 12 VOLTS FOR ANY OTHER TESTS AS READING WILL BE INCORRECT.

**OMC-EVINRUDE & JOHNSON MAGNETO  
& BATTERY CONDENSER SPECIFICATIONS**

Condenser No.	Capacity Reading In Microfarads Min. Max.
72-864 . . . . .	.27-.33
72-873 . . . . .	,20-,24
170-002 - Use 172-470 . . . . .	.27-.36
170-067 - Use 171-449 . . . . .	.09-.125
171-311 - Use 171-471 . . . . .	.18-.25
171-448 . . . . .	.09-.125
171-449 . . . . .	.09-.125
171-470 . . . . .	.27-.36
171-471 . . . . .	.18-.26
201-484 . . . . .	.16-.24
201-753 . . . . .	.16-.24
300-153 . . . . .	.15-.205
510-173 . . . . .	.18-.22
580-256 . . . . .	.37-.41
580-321 . . . . .	.18-.22
580-422 . . . . .	.25-.29
580-573 . . . . .	.18-.22

## KIEKHAEFER-MERCURY COIL SPECIFICATIONS

Coil No.	Mfg.	Mfg. No.	Oper. Amps	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
26433	Kiekhaefer	Delco-Remy	.9	.9- 1.2	55 - 65
30-204	Scintilla	10-38222Y	2.30		40 - 60
32193	Autolite	200673	1.1	1.2- 1.4	60 - 70
32704	(Note: With Internal Resistance)		.5	3.9- 4.3	48 - 58
38547			.5	3.9- 4.8	48 - 58
*282-682			1.9		6 - 8
298-2568			1.8	4.5- 5.5	40 - 60
*332-2983A (with steel frame)			2.0		8 - 10
**394-1128	Kiekhaefer		1.8		55 - 65
**394-1128A1	Kiekhaefer	394-1128	1.8		55 - 65
395-679	Wico	X-2156	1.5		30 - 50
396-648	Eisemann	27894	1.6		40 - 60
397-361	Fairbanks	H-2477, E-2477C-T-2477	2.0		40 - 60
397-430	Fairbanks	QY-2477C	2.0		45 - 60
398-173	Phelon	F-1835	2.5		40 - 65
398-716	Phelon	F-608	2.5		40 - 65
398-2201	Phelon	FG-6446	2.0	.45- .60	45 - 60
398-2545			2.0	4.5- 5.5	35 - 45
399-125	Scintilla	10-70132	2.10		30 - 50
399-756	Scintilla	10-70100	2.10		30 - 50
**399-1246	Scintilla	10-111280	1.5		30 - 42

\*To Check these coils use C.D. Adaptor #55-980 beginning with Serial No. 325.

\*\*OFF Plate

## KIEKHAEFER-MERCURY CONDENSER SPECIFICATIONS

Condenser No.	Mfg.	Mfg. No.	Capacity Reading in Microfarads Min. Max.
33662			.18- .25
33706			.18- .25
37189			.24- .30
393-1283	Delco-Remy		.18- .23
394-1130	Kiekhaefer	394-1130	.28- .35
395-684	Wico	X-2186	.16- .20
396-650	Eisemann	24235	.19- .23
397-359	Fairbanks	M 2433	.18- .22
397-741	Fairbanks	"S"	.28- .32
397-874	Fairbanks	KX 2433	.28- .35
398-176	Phelon	FG-1807	.22- .27
398-693	Phelon	FG-1770	.14- .18
398-713	Phelon	FG-607	.15- .19
398-2203	Phelon	FG-6453	.14- .20
*399-123	Scintilla	10-82238	.15- .21
399-759	Scintilla	10-70141	.17- .21

## KIEKHAEFER-MERCURY RESISTOR TEST

Mfg. & Part No.	Resistance Reading Min. Max.
Kiekhaefer - 393-1286	1.3- 1.7
Kiekhaefer - 393-1482	2.0- 2.4
Kiekhaefer - 393-1572	3.0- 3.4
Kiekhaefer - 32227 Autolite - 200673 (Mfg. & No.)	.410-.520

## KOHLER COMPANY COIL AND CONDENSER SPECIFICATIONS

Coil No.	Engine Model	Mfg.	Mfg. No.	Operating Amperage	Secondary Continuity Min. Max.	Condenser #	Capacity Reading in Microfarads Min. Max.
S410				1.60			
220435	K91	Phelon	FG2145	2.8	40 - 60	220434	Phelon FG2138 .12- .16
230075	K161	Scintilla	10-160396	1.8	30 - 40	220082	Scintilla 10-79168Y .18- .23
A-231340		Delco	1115043	.55	39 - 48	230722	Delco 1965489 .27- .31
270560	K662	Wico	X12810	1.7	60 - 75	270541	Wico X6916 .30- .34
270775	K662	Fairbanks	Q3477C	1.7	50 - 70	270779	Fairbanks SYX2433X .28- .36
271144	K662	Wico	X5700C	1.7	40 - 60	270607	Wico X5614 .16- .20
275756	K241 & K33	Phelon	FG1641	2.2	50 - 70	220434	Phelon FG2138 .12- .16

## LAUSON POWER PRODUCTS COIL SPECIFICATIONS

Coil No.	Mfg. Model #	Mfg. No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
22094	Wico	X2156	1.50		30 - 50
23084	Wico	X-4943	1.50		35 - 55
24439	Phelon	FG-463	2.8		40 - 60
25527	Wico	X-7467	1.80		30 - 50
25811	Fairbanks-Morse	A-2477A	1.60		
26318	Fairbanks-Morse	T-2477A	1.80		35 - 55
26624	Fairbanks-Morse	FX-2477	1.90		50 - 60
26714	Wico	X-8795	1.80		30 - 50
26787	Fairbanks-Morse	HX-2477	1.90		50 - 60
26935	Wico	X-8786	1.80		
27089	Wico	X-9055	2.10		35 - 55
27089	Wico	X-9695 RAP with X-11180	1.80		40 - 50
27376	Wico	X-11205	2.0		40 - 55
27531	Wico	X-9965	1.8		40 - 55
28259	Wico	X-11654	2.1		40 - 55
29176	Phelon	FG-3294	2.8		40 - 60
29176	Phelon	FG-4081	2.8		40 - 60
29632	Lauson	5022 (Syncro)	2.3	.5- 1.5	40 - 55
30560	Lauson VH60 John Deere (Replaces 30546)	5160 (Syncro)	1.6	.45-.55	50 - 60
32014	Lauson HH80	8	1.4	.37- .45	55 - 65
32014	Lauson HH100	10	1.4	.37- .45	55 - 65
32014	Lauson HH120	12	1.4	.37- .45	55 - 65
610197	Eisemon	H27-940	1.9		35 - 55
610215	Fairbanks-Morse	U-2477	1.70		50 - 60
610242	Phelon	FG-114	2.5		40 - 60
610277	Phelon	FG-307	2.5		40 - 60
610286	Phelon	FG-420	2.8		40 - 60
610287	Phelon	FG-420B	2.8		40 - 60
610287	Phelon	FG-1573B	2.8		40 - 60
610292	Phelon	FG-470	2.8		40 - 60
610293	Phelon	FG-470B	2.8		40 - 60
610298	Phelon	FG-492B	2.5		40 - 60
610323	Phelon	FG-1309	2.8		40 - 60
610355	Wico	X-8877	2.0		
610355	Wico	X-9767	1.80		35 - 55
610371	Phelon	FG-2180	2.8		40 - 60
610371	Phelon	FG-2446	2.8		40 - 60
610415	Wico	X-7500	2.10		30 - 50
610425	Wico	X-5345	1.50		40 - 60
610466	Phelon	FG-2641	2.8		40 - 60
610477	Phelon	FG-2180B	2.8		40 - 60
610482	Phelon	FG-2641B	2.8		40 - 60
610586	Phelon	FG-4055	2.8		50 - 70
610657	Phelon	FG-6335	1.4	.85- .95	50 - 60
610706	Lauson		1.8	.59- .65	55 - 65

**LAUSON POWER PRODUCTS CONDENSER SPECIFICATIONS**

Condenser No.	Mfg.	Mfg. No.	Capacity Reading
			in Microfarads
			Min. Max.
22095	Wico	X-2186	.16-.20
23359	Wico	X-5800	.16-.20
24445	Phelon	FG-458	.12-.16
25809	Fairbanks-Morse	R-2433	.17-.23
26219	Wico	X-5614	.16-.20
26641	Phelon	FG-458B	.12-.16
26718	Wico	X-9100	.26-.30
26786	Fairbanks-Morse	GX-2433	.16-.19
27527	Wico	X-11000	.16-.23
29164	Wico	X-12174	.16-.20
29172	Phelon	FG-4082	.15-.19
29177			.15-.19
29559	Wico	X-11672	.16-.20
29559	Wico	X-12513	.16-.20
30548			.12-.14
30548-A			.16-.18
32015			.24-.27
610253	Phelon	FG-159	.15-.19
610268	Phelon	FG-216	.15-.19
610269	Phelon	FG-216B	.15-.19
610294	Phelon	FG-471	.12-.16
610294	Phelon	FG-471B	.12-.16
610303	Phelon	FG-607	.15-.19
610303	Phelon	FG-1205	.35-.38
610331	Phelon	FG-1355	.12-.16
610370	Phelon	FG-2176	.15-.19
610424	Wico	X-5342	.30-.34
610438	Wico	X-5463	.16-.20
610447	Fairbanks-Morse	BX-2433	.16-.19
610467	Phelon	FG-2642	.12-.16
610588	Phelon	FG-4016	.18-.22
610707			.19-.21

**LAWNBOY COIL AND CONDENSER SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.	Capacity Reading
				in Microfarads
				Min. Max.
580-118	1.60		30 - 40	510173 .13-.17
580-184	1.60		30 - 40	677299 .13-.17
678-111	1.60		30 - 40	
678-539	1.5	.48-.56	35 - 45	

### MALLORY ELECTRIC CORPORATION COIL SPECIFICATIONS

Color Code & Coil No.	Operating Amperage	Primary Resistance	Ballist Resistance	Secondary Continuity Min. Max.
Green 6V-6000	.9	.4-.6	.3-.6	55 - 70
Blue 12V-12000	.9	1.1-1.4	.7-1.0	55 - 70
Black F-6	.9	.6-.8	.35-.6	55 - 65
Red F-12	.8	2.1-2.4	.7-.9	55 - 65
Black 12V-258288	1.1	1.5-1.9	.35-.55	50 - 65
Red 25773	1.0	1.9-2.3		50 - 65
Brown 25742	1.25	.8-1.2		52 - 62

THIS TEST FOR MODEL 88 ONLY

Color Code & Coil No.	Operating Amperage	Primary Resistance	Resistance Between P & R	Ballist Resistance	Secondary Continuity Min. Max.
MS6VP	P-Side .4	.5-.7		R-.45-.55	
MS6VP	R-Side .6	.4-.6	1.1-1.3	R-.45-.55	65 - 75
MS6VN	P-Side .4	.5-.7		P-.45-.55	
MS6VN	R-Side .6	.5-.7	1.1-1.3	R-.45-.55	65 - 75
MS12VN	P-Side .3	1.5-1.8		.9-1.2	
MS12VN	R-Side .5	.95-1.25	2.5-2.8	.9-1.2	60 - 70
MS12VP	P-Side .3	2.0-3.5		.9-1.2	
MS12VP	R-Side .5	1.0-3.0	4.0-5.0	.9-1.2	60 - 70

NOTE THIS TEST FOR MODEL 60 ONLY

MS6VP	2.9	65 - 75
MS6VN	2.5	65 - 75
MS12VN	1.9	65 - 75
MS12VP	1.9	65 - 75

### MALLORY ELECTRIC CORPORATION CONDENSER SPECIFICATIONS

Condenser Number	Capacity Reading in Microfarads
24125	.34-.38
24895	.34-.38
25010	.34-.38
25500	.26-.30
25600	.26-.30

## McCULLOCH CORP. OUTBOARD MOTOR SPECIFICATIONS

Year	Engine Model No.	Kind	HP	Stator Assy. No.	Make Mfg.	Coil No.	Operat. Amp.	Secondary Continuity Min. Max.	Condenser No.	Capacity Microfarads
1955	1055		3.6	FG-1632	Phelon	FG-1573G	2.80	40 - 60	FG-471B	.12 - .16
1955	3055			FG-1632	Phelon	FG-1573G	2.80	40 - 60	FG-471B	.12 - .16
1955	1755		5.7		Wico	X-7467	1.80	30 - 50	X-9182	.26 - .30
1955	1355		7.5	FG-1629	Phelon	FG-1573C	2.80	40 - 60	FG-471B	.12 - .16
1955	2355			FG-1629	Phelon	FG-1573C	2.80	40 - 60	FG-471B	.12 - .16
1955	1855		10		Wico	X-7467	1.80	30 - 50	X-9182	.26 - .30
	2855				Wico	X-7467	1.80	30 - 50	X-9182	.26 - .30
1955	1955		16	X-8726	Wico	X-7345	1.70	35 - 55	X-9182	.26 - .30
1955	3655	Std. P.S.		FG-2118	Phelon	FG-2331	2.80	40 - 60	FG-2111	.12 - .16
1956	1665	F	33	FG-2552	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16
1956	1665-3	F(EL)	33	FG-2552	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16
1956	2665	C	33	FG-2552	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16
1956	2665-3	C(EL)	33	FG-2552	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16
1956	3665	SA	33	FG-2552	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16

## McCULLOCH CORP. OUTBOARD MOTOR SPECIFICATIONS (Cont'd)

Year	Engine Model No.	Kind	HP	Stator Assy. No.	Make Mfg.	Coil No.	Operat. Amp.	Secondary Continuity Min. Max.	Condenser No.	Capacity Microfarads
1956	3665-2	SA(LC)	33	FG-2552	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16
1956	3665-3	SA(EL)	33	FG-2552	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16
1956	3665-4	SA(EL)	33	FG-2552	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16
1956	4665	G	33	FG-2552	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16
1956	4665-3	G(EL)	33	FG-2552	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16
1957	1075	F.	3.6	FG-1632	Phelon	FG-1573	2.80	40 - 60	FG-471B	.12 - .16
1957	1775	F.	5		Wico	X-7467	1.80	30 - 50	X-9182	.26 - .30
1957	1875	F.	10		Wico	X-7467	1.80	30 - 50	X-9182	.26 - .30
1957	1975	F.	16	X-8726	Wico	X-7345	1.70	35 - 55	X-5463	.16 - .20
1957	1675	F.	35	FG-2550	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16
1957	1316	F.	35E.	FG-2550	Phelon	FG-2546	2.50	40 - 60	FG-2111	.12 - .16
1957	3075	S.A.	3.6	FG-1632	Phelon	FG-1573	2.80	40 - 60	FG-471B	.12 - .16
1957	3775	SA	5		Wico	X-7467	1.80	30 - 50	X-9182	.26 - .30
1957	3375	S.A.	7.5	FG-1629	Phelon	FG-1573C	2.80	40 - 60	FG-471B	.12 - .16
1957	3875	S.A.	10		Wico	X-7467	1.80	30 - 50	X-9182	.26 - .30
1957	3975	S.A.	16	X-8726	Wico	X-7345	1.70	35 - 55	X-5463	.16 - .20
1957	339	S.A.	16E.	X-9763	Wico	X-7345	1.70	35 - 55	X-5463	.16 - .20
1957	3675	S.A.	40	FG-2903	Phelon	FG-2546	2.50	40 - 60	FG-2727	.18 - .22
1957	336	S.A.	40E.	FG-2902	Phelon	FG-2723	2.80	40 - 60	FG-2727	.18 - .22
1957	536	S.A.	Royal	FG-2902	Phelon	FG-2723	2.80	40 - 60	FG-2727	.18 - .22
1957	4075	Hia.	3.6	FG-1632	Phelon	FG-1573	2.80	40 - 60	FG-471B	.12 - .16
1957	4775	Hia.	5		Wico	X-7467	1.80	30 - 50	X-9182	.26 - .30
1957	4375	Hia.	7.5	FG-1629	Phelon	FG-1573C	2.80	40 - 60	FG-471B	.12 - .16
1957	4975	Hia.	16	X-8726	Wico	X-7345	1.70	40 - 60	X-5463	.16 - .20
1957	4675	Hia.	38	FG-2550	Phelon	FG-2546	2.80	40 - 60	FG-2111	.12 - .16

McCULLOCH CORP. OUTBOARD MOTOR SPECIFICATIONS (Cont'd)

## McCULLOCH CORP. OUTBOARD MOTOR SPECIFICATIONS (Cont'd)

Year	Eng. No.	Make	HP	Stator Assy. No.		Mfg. Make	Coil Number		Oper. Amp.	Secondary Continuity Min. Max.	Gen. Coil No.		Condenser No.		Capacity Micro- farads	
				Mfg.	Scott		Mfg.	Scott			Mfg.	Scott	Mfg.	Scott		
1958	3085	Scott	3.6	X11445	3085-101	Wico	X11477	3885-113	2.00	40 60			X11397	3885-115	.16-.20	
1958	3785	Scott	5	X9066	3845-101	Wico	X7467	3845-113	1.80	30 50			X9182	3745-115	.26-.30	
	3785	Scott	5	X5118	3785-101	Wico	X11477	3885-113	2.00	40 60			X11397	3885-115	.16-.20	
1958	3385	Scott	7.5	FG1629	1355-101	Phel	FG1573C	1355-134	2.8	40 60			FG471B	5010-115	.12-.16	
	3385	Scott	7.5	X11391	3885-101	Wico	X11477	3885-113	2.00	40 60			X11397	3885-115	.16-.20	
1958	3885	Scott	10	X11391	3885-101	Wico	X11477	3885-113	2.00	40 60			X11397	3885-115	.16-.20	
1958	3985	Scott	16	X8726	3925-101	Wico	X7345	509-113	1.70	35 55			X9182	3745-115	.26-.30	
1958	135	Scott	22	X11383	135-101	Wico	X11352	3685-113	2.00	40 60			X11362	3685-115	.26-.30	
	335	Scott	22E	X11345	335-101	Wico	X11352	3685-113	2.00	40 60	X11353	335-113	X11362	3685-115	.26-.30	
1958	3685	Scott	40	FG2852	3675-101	Phel	FG2546	3665-134	2.5	40 60			FG2727	3675-115	.18-.22	
	3685	Scott	40	X11537	3685-101	Wico	X11352	3685-113	2.00	40 60			X11362	3685-115	.26-.30	
	3685	Scott	40E	FG2687	336-101	Phel	FG2546	3665-134	2.5	40 60	FG2725	326-134	FG2723	336-134	FG2727	3675-115 .18-.22
	3685	Scott	40E	FG3232	1336-101	Phel	FG3375	3665-134	2.8	35 55	FG2725	326-134	FG2723	336-134	FG2727	3675-115 .18-.22
	3685	Scott	40E	FG3475	1436-101	Phel	FG3375	3665-134	2.8	35 55	FG3476	536-134	FG3478	636-115	.18-.22	
	1536	Scott	40	FG3232B	1536-101	Phel	FG3375	3665-134	2.8	35 55	FG3477	636-134	FG2725	326-134	FG2727	3675-115 .18-.22
R.S.										FG2723	336-134					
1958	332	Scott	60		332-101	Phel	FG3437	332-113	1.0	55 75			FG3044	332-115	.24-.28	
1959	I30A	Scott	3.6	X11445	3085-101	Wico	X11477	3885-113	2.00	40 60			X11397	3885-115	.16-.20	

McCULLOCH CORP. OUTBOARD MOTOR SPECIFICATIONS (Cont'd)

Year	Eng. No.	Make	HP	Stator Assy. No.		Mfg. Make	Coil Number		Oper. Amp.	Secondary Continuity Min. Max.	Gen. Coil No.		Condenser No.		Capacity Micro- farads	
				Mfg.	Scott		Mfg.	Scott			Mfg.	Scott	Mfg.	Scott		
1959	137A	Scott	5	X5118	3785-101	Wico	X11477	3885-113	2.00	40	60			X11397	3885-115	.16-.20
	137A	Scott	5	X9066	3845-101	Wico	X7467	3845-113	1.80	30	50			X9182	3745-115	.26-.30
	137A	Scott	5	FG3712	137-101	Phel	FG3689	138-134	2.5	40	60			FG3693	138-115	.15-.19
1959	133A	Scott	7.5	FG3714	138-101	Phel	FG3689	138-134	2.5	40	60			FG3693	138-115	.15-.19
1959	138A	Scott	10	X9066	3845-101	Wico	X7467	3845-113	1.80	30	50			X9182	3745-115	.26-.30
	138A	Scott	10	FG3714	138-101	Phel	FG3689	138-134	2.5	40	60			FG3693	138-115	.15-.19
1959	135A	Scott	25	X11976B	735-101	Wico	X11352	3685-113	2.00	40	60			X11362	3685-115	.26-.30
	135A	Scott	25	FG3800	535-101	Phel	FG3755	436-134	2.5	40	60			FG3478	1436-115	.18-.22
	135A	Scott	25	FG3800	535-101	McCulloch	736-232	736-232	1.6	43	55			FG3478	1436-115	.18-.22
	335A	Scott	25E	FG3799	635-101	Phel	FG3755	436-134	2.5	40	60	FG3809	535-134	FG3478	1436-115	.18-.22
	335A	Scott	25E	FG3799	635-101	McCulloch	736-232	736-232	1.6	43	55	FG3809	535-134	FG3478	1436-115	.18-.22
	335A	Scott	25E	W11983B	435-101	Wico	X11352	3685-113	2.00	40	60	FG3810	635-134	X11362	3685-115	.26-.30
1959	136A	Scott	40	X11987B	136-101	Wico	X11352	3685-113	2.00	40	60			X11362	3685-115	.26-.30
	136A	Scott	40	FG3770	236-101	Phel	FG3755	436-134	2.5	40	60			FG3478	1436-115	.18-.22
	136A	Scott	40	FG3770	236-101	McCulloch	736-232	736-232	1.6	43	55			FG3478	1436-115	.18-.22
	336A	Scott	40E	FG3624	436-101	Phel	FG3375	3665-134	2.8	35	55	FG3476	1336-134	FG3478	1436-115	.18-.22
1959	336A	Scott	40E	FG3752	836-101	Phel	FG3755	436-134	2.5	40	60	FG3477	1436-134			
	336A	Scott	40E	FG3752	836-101	McCulloch	736-232	736-232	1.6	43	55	FG3760	136-134	FG3478	1436-115	.18-.22
1959	336A	Scott	40E	12076	936-101	Wico	X11352	3685-113	2.00	40	60	FG3761	936-134	FG3478	1436-115	.18-.22
	332A	Scott	60		332-101	Phel	FG3437	332-113	1.0	55	75	X11710	435-113	X11362	3685-115	.26-.30
						FG3681	432-113	1.8	55	75			FG3044	332-115	.24-.28	

## McCULLOCH CORP. OUTBOARD MOTOR SPECIFICATIONS (Cont'd.)

Year	Eng. No.	Mc	HP	Stator Assy. No.		Mfg., Make	Coil No.		Oper. Amp.	Secondary Continuity Min., Max.	Generator Coil		Condenser No.		Capacity Micro- farads
				Mfg.	Scott		Mfg.	Scott			Mfg.	Scott	Mfg.	Scott	
1960	A3BB	Scott	3.5		130-101	Phelon	FG3689	138-134	2.5	40 - 60			FG3693	138-115	.15-.19
1960	A3KB	Scott	6.0	134-101	134-101	McCul	134-134	134-134	1.9	30 - 45			X12293	134-115	.18-.22
1960	A3EB	Scott	7.5	134-101	134-101	McCul	134-134	134-134	1.9	30 - 45			X12293	134-115	.18-.22
1960	C3EB	Scott	7.5	134-101	134-101	McCul	134-134	134-134	1.9	30 - 45			X12293	134-115	.18-.22
1960	A3FB	Scott	12		139-101	Phelon	FG4138	139-134	2.5	40 - 60			FG3693	138-115	.15-.19
1960	A3GB	Scott	25M		735-101	Wico	X11352	3685-113	2.0	40 - 60			X11362	3685-115	.26-.30
1960	B3GB	Scott	25ML		735-101	Wico	X11352	3685-113	2.0	40 - 60			X11362	3685-115	.26-.30
1960	C3GB	Scott	25E		735-101	McCul	436B-134	Top	1.4	40 - 60			X11362	3685-115	.26-.30
1960	D3GB	Scott	25EL		735-101	McCul	436B-134	Bottom	1.4	40 - 60			X11362	3685-115	.26-.30
1960	A3HB	Scott	40M		136B-101	Wico	X11352	3685-113	2.0	40 - 60			X11362	3685-115	.26-.30
1960	B3HB	Scott	40ML		136B-101	Wico	X11352	3685-113	2.0	40 - 60			X11362	3685-115	.26-.30
1960	C3HB	Scott	40E		336B-200	McCul	436B-134	436B-134	1.4	45 - 60			X12264	335B-115	.26-.30
1960	D3HB	Scott	40EL		336B-200	McCul	436B-134	436B-134	1.4	45 - 60			X12264	335B-115	.26-.30
1960	E3HB	Scott	40R		336B-200	McCul	436B-134	436B-134	1.4	45 - 60			X12264	335B-115	.26-.30
1960	F3HB	Scott	40RL		336B-200	McCul	436B-134	436B-134	1.4	45 - 60			X12264	335B-115	.26-.30
1960	C3JB	Scott	60E			McCul	C3JB-232	532-134	1.4	45 - 60				332B-115	.25-.27
1960	D3JB	Scott	60EL			McCul	C3JB-232	C3JB-232	1.4	45 - 60				332B-115	.25-.27
1960	C3LB	Scott	60E			McCul	C3JB-232	532-134	1.4	45 - 60				332B-115	.25-.27
1960	D3LB	Scott	60EL			McCul	C3JB-232	C3JB-232	1.4	45 - 60				332B-115	.25-.27

McCULLOCH CORP. OUTBOARD MOTOR SPECIFICATIONS (Cont'd)

## McCULLOCH CORP. OUTBOARD MOTOR SPECIFICATIONS (Cont'd)

Year	Eng. No.	HP	Coil Number			Oper. Amp.	Prim. Res. Min., Max.	Sec. Cont. Min., Max.	Condenser No.		Capacity Micro- farads
			Make	Mfg.	Scott				Mfg.	Scott	
1962	62300310	3.6	Phelon	FG3689	138-134	2.5		45 - 60	FG3693	138-115	.15-.19
	62300410	3.6	Phelon	FG3689	138-134	2.5		45 - 60	FG3693	138-115	.15-.19
	62300610	6.0	Phelon	FG6001	A3EC-134	2.5		45 - 60	FG4477	A3EC-115	.15-.19
	62300710	7.5	Phelon	FG6001	A3EC-134	2.5		45 - 60	FG4477	A3EC-115	.15-.19
	62300810	7.5	Phelon	FG6001	A3EC-134	2.5		45 - 60	FG4477	A3EC-115	.15-.19
	62301410	14.1	Phelon	FG4128	139-134	2.5		40 - 55	FG3693	138-115	.15-.19
	62301420	14.1	Phelon	FG4128	139-134	2.5		40 - 55	FG3693	138-115	.15-.19
1962	62302610	27.7	Wico	X11352	3685-113	2.0		45 - 60	X11362	3685-115	.26-.30
	62302710	27.7	Wico	X11352	3685-113	2.0		45 - 60	X11362	3685-115	.26-.30
1962	62302730	27.7	McC		C3HC-134	1.4	.55-.85	45 - 60	X12264	335B-115	.26-.30
1962	62302810	27.7	Wico	X11352	3685-113	2.0		45 - 60	X11362	3685-115	.26-.30
	62302820	27.7	Wico	X11352	3685-113	2.0		45 - 60	X11362	3685-115	.26-.30
1962	62302830	27.7	McC		C3HC-134	1.4	.55-.85	45 - 60	X12264	335B-115	.26-.30
	62302840	27.7	McC		C3HC-134	1.4	.55-.85	45 - 60	X12264	335B-115	.26-.30
1962	62304410	43.7	Wico	X11352	3685-113	2.0		45 - 60	X11362	3685-115	.26-.30
	62304420	43.7	Wico	X11352	3685-113	2.0		45 - 60	X11362	3685-115	.26-.30
1962	62304430	43.7			71230A	.95	1.15 - 1.4	60 - 70	X12264	335B-115	.26-.30
	62304440	43.7			71230A	.95	1.15 - 1.4	60 - 70	X12264	335B-115	.26-.30
	62304450	43.7			71230A	.95	1.15 - 1.4	60 - 70	X12264	335B-115	.26-.30
	62304360	43.7			71230A	.95	1.15 - 1.4	60 - 70	X12264	335B-115	.26-.30
	62304350	43.7			71230A	.95	1.15 - 1.4	60 - 70	X12264	335B-115	.26-.30
1962	62307530	75.2			71198	.95	1.1 - 1.3	60 - 70	332B-115	332B-115	.25-.27
	62307540	75.2			71198	.95	1.1 - 1.3	60 - 70	332B-115	332B-115	.25-.27
	62307030	75.2			71198	.95	1.1 - 1.3	60 - 70	332B-115	332B-115	.25-.27
	62307040	75.2			71198	.95	1.1 - 1.3	60 - 70	332B-115	332B-115	.25-.27
	62307630	75.2			71198	.95	1.1 - 1.3	60 - 70	332B-115	332B-115	.25-.27

McCULLOCH CORP. OUTBOARD MOTOR SPECIFICATIONS (cont'd)

## 1964 McCULLOCH CORP. OUTBOARD MOTOR SPECIFICATIONS (cont'd)

Model No.	H.P.	Make	Mfg.	COIL NUMBER		Oper. Amp.	Primary Resistance Min.-Max.	Secondary Continuity Min.-Max.	CONDENSER NO.		Capacity Microfarad Min.-Max.
				Scott	FG3689				Scott	Mfg.	
64300310	3.5	Phelon	FG3689	1380134	2.5			45 - 60	1380115	FG3693	.15 - .19
64300410	3.5	Phelon	FG3689	1380134	2.5			45 - 60	1380115	FG3693	.15 - .19
64300710	7.5	Phelon	FG6001	76088	2.5			45 - 60	1380115	FG4477	.15 - .19
64300750	7.5	Phelon	FG6001	76088	2.5			45 - 60	1380115	FG4477	.15 - .19
64301410	14	Phelon	FG4128	1390134	2.5			40 - 55	1380115	FG3693	.15 - .19
14000200	14	Phelon	FG4128	1390134	2.5			40 - 55	1380115	FG3693	.15 - .19
64302810	28	Wico	X11135	36850113	2.0			45 - 60	36850115	X11362	.26 - .30
64302830	28	McCul		TOP CYL							
				76089	1.4			45 - 60	76067	X11264	.26 - .30
				BOTTOM							
				76092	1.4			45 - 60	76067	X11264	.26 - .30
64304510	45	Wico	X11352	36850113	2.0			45 - 60	36850115	X11362	.26 - .30
64304520	45	Wico	X11352	36850113	2.0			45 - 60	36850115	X11362	.26 - .30
64304530	45	Andover		71230A	1.1	1.0 - 1.4		60 - 70	76067	X11264	.26 - .30
64304540	45	Andover		71230A	1.1	1.0 - 1.4		60 - 70	76067	X11264	.26 - .30
	45			7387-5	1.0	1.1 - 1.4		55 - 65			
64307530	75	Andover		75455	1.0	1.0 - 1.4		60 - 70	76066	X11264	.25 - .27
64307543	75	Andover		75455	1.0	1.0 - 1.4		60 - 70	76066	X11264	.25 - .27
	75			79670	.85	1.02 - 1.42		55 - 65	76066A		.18 - .22

## 1965-66 McCULLOCH CORP. OUTBOARD MOTOR SPECIFICATIONS (cont'd)

Model No.	H.P.	Make	COIL NUMBER		Oper. Amp.	Primary Resistance Min. Max.	Secondary Continuity Min. Max.	CONDENSER NO.		Capacity Microfarad Min. Max.
			Mfg.	McCulloch				Mfg.	McCulloch	
65300710	7.5	Phelon	FG6001	76088	2.5		45 - 60	FG4477	76065	.15-.19
65300750	7.5	Phelon	FG6001	76088	2.5		45 - 60	FG4477	76065	.15-.19
65301410	14	Phelon	FG4128	1390134	2.5		40 - 55	FG3693	1380115	.15-.19
14000200	14	Phelon	FG4128	1390134	2.5		40 - 55	FG3693	1380115	.15-.19
65302810	28	Wico	X11135	36850113	2.0		45 - 60	X11262	36850115	.26-.30
65302830	28	McCul		TOP CYL						
				76089	1.4		45 - 60	X11264	76067	.26-.30
				BOTTOM						
				76092	1.4		45 - 60	X11264	76067	.26-.30
65304510	45	Wico	X11352	36850113	2.0		45 - 60	X11262	36850115	.26-.30
65304520	45	Wico	X11352	36850113	2.0		45 - 60	X11262	36850115	.26-.30
65304530	45	Andover		71230A	1.1	1.0-1.4	60 - 70	X11264	76067	.26-.30
65304540	45	Andover		71230A	1.1	1.0-1.4	60 - 70	X11264	76067	.26-.30
	45			73875	1.0	1.1-1.4	55 - 65			
65307530	75	Andover		75455	1.0	1.0-1.4	60 - 70	X11264	76066	.25-.27
65307543	75	Andover		75455	1.0	1.0-1.4	60 - 70	X11264	76066	.25-.27
	75			79670	.85	1.02-1.42	55 - 65		76066A	.18-.22
140-OX	14	Phelon	FG4128	1390134	2.5		40 - 55	FG3693	1380115	.15-.19
450-OX	45	Wico	X11352	36850113	2.0		45 - 60	X11262	36850115	.26-.30

**McCULLOCH CORP. SUPPLEMENT SPECIFICATIONS FOR  
CHAIN SAWS**

Coil No. McCulloch	Operating Amperage	Primary Continuity Min. Max.	Secondary Continuity Min. Max.	Condenser No. Mfg.	McCulloch	Capacity Microfarads Min. Max.
62927 (E65)	1.5	.7 - .8	55 - 65			
79566 (K4)	1.1	.6 - .8	45 - 55			
79566 (K4)	1.1	.6 - .8	45 - 55			
76090	1.1	.6 - .9	45 - 55			
76959 (K4)	1.1	.6 - .9	45 - 55			
76091	1.1	.6 - .9	45 - 55			
PN71198A	.9	1.15-1.45	55 - 65			
55949A (C4)	1.5	.48- .55	45 - 55			

**TARGET AIRCRAFT ENGINE**

10471 (C65)      1.0      .4 - .5      42 - 52      X10455B      1008395      .18- .23

**NOTE:** 2 Coils mounted on one U shaped Lamination. Coils are connected in series.  
When testing, connect the 2 negative leads together. There is only one Positive Lead, two (2) High Tension Leads. Test each Coil separately by connecting High Tension Lead from Analyzer to each Coil.

**McCULLOCH  
COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance Scale #2 Min. Max.	Secondary Continuity Min. Max.
19033C .....	2.4	..... .21- .250	..... 30 - 50
24033E .....	2.4	..... .21- .250	..... 30 - 50
51494 .....	2.4	..... .21- .250	..... 30 - 50
51495 .....	2.4	..... .21- .250	..... 30 - 50
55013 .....	2.4	..... .21- .250	..... 37 - 48

**McCULLOCH  
CONDENSER SPECIFICATIONS**

Condenser	Capacity Microfarads
All Models .....	.18- .22

ONAN ENGINE/GENERATOR DIVISION OF STUDEBAKER CORP.  
COIL AND CONDENSER SPECIFICATIONS

Model No.	Stator Assembly	Coil No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.	Condenser No.	Condenser Microfarads Min. Max.
IC, IB & AH, AJ, AK CK (Prior to Spec. M)	160B305	160B155 160B86	.7 .75	.425-.475 .07-.11	48 - 60 55 - 65	312A1 312A19	.18-.22 .3-.7
BH		160B99	.75	.07-.11	55 - 65	312A19	.3-.7
CK (Spec. M)		166B268	.75	.1-.14	33 - 43	312A69	.28-.32
CK (Spec. M)		166B91	.75		32 - 44	312A19	.3-.7
CCK	162A237	166P259	.7	.2-.25	54 - 65	312A100	.3-.7
	162A196	160C483	1.2	.07-.1	54 - 65	312A69	.28-.32
<hr/>							
50	Model No.	Coil No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.	Condenser No. No.	Condenser Microfarads Min. Max.
CCK	160C792 Replaces 160C483 Prior Spec. "J"		.75	.7-.8	50 - 60		
	166C346 Begin Spec. "J"		.9	.87-1.0	60 - 70		
	160K722 Stator Assy. Magneto (Coil)			.47-.53			
	160K750						
	160B750		1.2	.45-.51	50 - 60		
MCCK	166B382		.9	.85-.95	60 - 70	31283	1.44-2.16
MJA	166B278		.5	3.0 -3.5	50 - 60		
JA	166B278		.5	3.0 -3.5	50 - 60		
MJB	160C792 Replaces 160C483 Prior Spec. "J"		.75	.7-.8	50 - 60		
JB	166B278 Begin Spec. "J"		.5	3.0 -3.5	50 - 60		
MJC	166B278		.5	3.0 -3.5	50 - 60		
JC						312A116	.24-.34

NOTE: All Coils with Double Secondary Lead see Page 23 Fig. 26 for Test Procedure. We are unable to test Condenser #31283.

OLIVER OUTBOARD MOTORS COIL AND  
CONDENSER SPECIFICATIONS

Coil No.	Operating Amperage	Secondary Continuity Min. Max.	Condenser No.	Capacity Reading in Microfarads Min. Max.
10-94097	1.8	25 - 45	10-82104	.13 - .17
10-111287	1.8	38 - 58	10-88603	.23 - .27

O & R ENGINES COIL AND CONDENSER SPECIFICATIONS

Coil No.	Mfg.	Mfg. No.	Operating Amperage	Secondary Continuity Min. Max.	Condenser No.	Capacity Reading in Microfarads Min. Max.
A-149-3	Phelon	6599	1.6	48 - 58	FG6325	.25 - .27

R. E. PHELON CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading in Microfarads Min. Max.	Condenser No.	Capacity Reading In Microfarads Min. Max.
FG-159	.15-.19	FG-4016	.18-.22
FG-216 Series	.15-.19	FG-4082	.15-.19
FG-410 Series	.12-.16	FG-4312	.24-.28
FG-458 Series	.12-.16	FG-4449	.15-.19
FG-471 Series	.12-.16	FG-4477	.15-.19
FG-549	.12-.16	FG-5420A	.27-.33
FG-607	.15-.19	FG-5420B	.27-.33
FG-1019	.12-.16	FG-6048	.15-.19
FG-1057	.16-.20	FG-6168	.15-.19
FG-1205	.34-.38	FG-6170	.15-.19
FG-1316	.12-.16	FG-6225	.11-.15
FG-1338	.15-.19	FG-6325	.25-.27
FG-1355	.12-.16	FG-6453	.15-.19
FG-1770	.14-.18	FG-6548	.24-.28
FG-1807	.22-.27	FG-6548B	.24-.27
FG-1928	.22-.27	FG-6867	.12-.16
FG-2111	.12-.16	FG-7047	.19-.21
FG-2138	.12-.16	FG-7130	.16-.18
FG-2176	.15-.19	FG-7146	.19-.21
FG-2448	.12-.16	FG-7157	.16-.18
FG-2642	.12-.16	FG-7184	.25-.27
FG-2727	.18-.22	FG-7224	.16-.18
FG-2733	.15-.19	FG-7239	.19-.21
FG-2780	.12-.16	FG-7251	.12-.14
FG-2993	.18-.22	FG-7270	.16-.18
FG-3044	.24-.28	FG-7437	.13-.16
FG-3478	.18-.22	FG-7460	.16-.18
FG-3505	.16-.18	FG-7468	.12-.14
FG-3693	.15-.19	FG-7499	.16-.18
FG-3723	.16-.18	FG-7533	.13-.16

R. E. PHELON MAGNETO COIL SPECIFICATIONS

Coil No.	Operating Amperage	Secondary Continuity Min. Max.	Coil No.	Operating Amperage	Secondary Continuity Min. Max.
FG-114 (taped)	2.5	40 - 60	FG-3437	1.0	55 - 75
FG-307 Series (taped)	2.5	40 - 60	FG-3502	2.8	45 - 60
FG-420 Series	2.8	40 - 60	FG-3595	2.5	55 - 65
FG-463 Series (taped) B	2.8	40 - 60	FG-3681	1.8	55 - 75
FG-470 Series (taped) B	2.8	40 - 60	FG-3689	2.5	40 - 60
*FG-492 Series B	2.5	40 - 60	FG-3755	2.5	40 - 60
FG-492 Series B	2.5	40 - 60	FG-3755X	2.5	45 - 60
FG-3773			FG-3773	2.8	45 - 60
FG-3872			FG-3872	2.8	45 - 60
FG-4055			FG-4055	2.8	50 - 70
FG-4081			FG-4081	2.8	40 - 60
FG-4128			FG-4128	2.5	40 - 55
FG-4448			FG-4448	2.8	45 - 60
FG-5265			FG-5265	3.0	47 - 67
FG-5380			FG-5380	2.5	60 - 70
FG-5395			FG-5395	2.5	60 - 70
**FG-1618	2.8	40 - 60	FG-6001	2.5	40 - 60
FG-1641	2.2	50 - 70	FG-6235	2.8	55 - 70
FG-1835	2.5	45 - 65	FG-6240	2.7	50 - 65
FG-2145	2.8	40 - 60	FG-6388	2.8	45 - 60
FG-2180	2.8	40 - 60	FG-6446	2.6	45 - 61
FG-2331	2.8	40 - 60	FG-6547	1.0	60 - 75
FG-2435	2.8	50 - 60	FG-6599	3.0	57 - 67
FG-2446	2.8	40 - 60	FG-7049	2.8	61 - 71
FG-2454	2.5	40 - 60	FG-7151	2.8	61 - 71
FG-2503	2.8	50 - 60	FG-7168	2.0	35 - 50
FG-2546	2.5	40 - 60	FG-7202	1.8	50 - 60
FG-2641	2.8	40 - 60	FG-7256	2.8	61 - 71
FG-2723	2.8	40 - 60	FG-7271	2.6	57 - 67
FG-2732	2.8	40 - 60	FG-7423	2.1	52 - 62
FG-2914	2.8	40 - 60	FG-7427	2.1	52 - 62
FG-2976	2.8	50 - 70	FG-7447	2.6	57 - 67
FG-3082	2.8	50 - 70	FG-7459	2.6	57 - 67
FG-3289	2.8	50 - 60	FG-7469	2.25	60 - 70
FG-3294	2.8	40 - 60	FG-7502	2.7	54 - 64
FG-3375	2.8	35 - 55			

\*Coils above are molded unless listed "taped".

\*FG-492 Coil - Ground out one secondary terminal while testing other.

\*\*FG-1618 Coil - Connect the core ends (common ground) during tests.

### PIONEER CHAIN SAW COIL SPECIFICATIONS

Coil No.	Model No.	Mfg.	Operating Amperage	Primary Resistance Min.-Max.	Secondary Continuity Min., Max.
X11180	600	Wico	1.8		35 - 55
470685	400	OMC	1.4	.5- .7	40 - 55
471365	11-10	OMC	1.3	.6- .7	50 - 60
580454	700	OMC	1.4	.4- .6	30 - 40

### PIONEER CHAIN SAW CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading In Microfarads Min. Max.
X11181 . . . . .	.16- .20
426528 . . . . .	.18- .22
471354 . . . . .	.16- .20

### PIONEER GEN-E-MOTOR COIL SPECIFICATIONS

Coil No.	Operating Amperage	Secondary Continuity Min. Max.
A60-084 . . . . .	2.8	40 - 60
C62-180 . . . . .	2.8	35 - 55
60-1030 . . . . .	2.8	40 - 60
60-1445 . . . . .	2.3	40 - 55

### PIONEER GEN-E-MOTOR CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading in Microfarads Min. Max.
60-088 . . . . .	.18- .22
60-1064 . . . . .	.18- .22

### VERTEX MAGNETO MANUFACTURED BY RONCO CORPORATION COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
1111	1.25	.35 - .45	45 - 50

Full power amperage approximately 2.6

### VERTEX CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading in Microfarads Min. Max.
1210 . . . . .	.24

## SEARS (FORMERLY ELGIN OUTBOARD MOTORS)

Motor Model No.	H.P.	Year	Wico Coil No.	Operating Amperage	Coil Continuity Min. Max.	Wico Cond. No.	Cond. Cap. Mfd.
571.58211	2	1954-56	X7500	2.10	30 - 50	X5463	.16-.20
571.58221	2	1957	X7500	2.10	30 - 50	X5463	.16-.20
571.58231	2	1958	X7500	2.10	30 - 50	X9182	.26-.30
571.58232	2	1958	X11406	2.10	43 - 54	X11397	.16-.20
571.58571	5	1954-56	X7500	2.10	30 - 50	X9182	.26-.30
571.59501	5-1/2	1956	X7500	2.10	30 - 50	X9327	.26-.30
571.59521	5-1/2	1957	X7500	2.10	30 - 50	X9327	.26-.30
571.59531	5-1/2	1958	X7500	2.10	30 - 50	X9327	.26-.30
571.59532	5-1/2	1958	X11406	2.10	40 - 60	X11397	.16-.20
571.58711	7-1/2	1955	X7500	2.10	30 - 50	X5463	.16-.20
571.59701	7-1/2	1956	X7500	2.10	30 - 50	X9327	.26-.30
571.58781	7-1/2	1957	X7500	2.10	30 - 50	X5463	.16-.20
571.59721	7-1/2	1957	X7500	2.10	30 - 50	X9327	.26-.30
571.59731	7-1/2	1957	X7500	2.10	30 - 50	X9327	.26-.30
571.58782	7-1/2	1958	X11406	2.10	40 - 60	X11397	.16-.20
571.59732	7-1/2	1958	X11406	2.10	40 - 60	X11397	.16-.20
571.58901	12	1955	X7500	2.10	30 - 50	X9327	.26-.30
571.58911	12	1955	X7500	2.10	30 - 50	X9327	.26-.30
571.58902	12	1956	X7500	2.10	30 - 50	X9327	.26-.30
571.58912	12	1956	X7500	2.10	30 - 50	X9327	.26-.30
571.58921	12	1956-57	X7500	2.10	30 - 50	X9327	.26-.30
571.58941	12	1957	X7500	2.10	30 - 50	X9327	.26-.30
571.58942	12	1957	X7500	2.10	30 - 50	X9327	.26-.30
571.58951	12	1957	X7500	2.10	30 - 50	X9327	.26-.30
571.58952	12	1957	X7500	2.10	30 - 50	X9327	.26-.30
571.58931	12	1958	X11406	2.10	40 - 60	X11397	.16-.20
571.58961	12	1958	X7500	2.10	30 - 50	X9327	.26-.30
571.58962	12	1958	X7500	2.10	30 - 50	X9327	.26-.30
571.58971	12	1958	X7500	2.10	30 - 50	X9327	.26-.30
571.58972	12	1958	X7500	2.10	30 - 50	X9327	.26-.30

## SEARS (FORMERLY ELGIN OUTBOARD MOTORS Cont'd)

Motor Model No.	H.P.	Year	Fairbanks-Morse Coil No.	Operating Amperage	Coil Continuity Min. Max.	Fairbanks-Morse Cond. No.	Cand. Cap. Mfd.
571.59402	25	1956	LX2477	1.50	40 - 60	S2433	.28-.33
571.59403	25	1956	LX2477	1.50	40 - 60	S2433	.28-.33
571.59412	25	1956	LX2477	1.50	40 - 60	S2433	.28-.33
571.59413	25	1956	LX2477	1.50	40 - 60	S2433	.28-.33
571.59601	25	1956	LX2477	1.50	40 - 60	S2433	.28-.33
571.59611	25	1956	LX2477	1.50	40 - 60	S2433	.28-.33
571.59421	30	1957	LX2477	1.50	40 - 60	S2433	.28-.33
571.59431	30	1957	LX2477	1.50	40 - 60	S2433	.28-.33
571.59621	30	1957	LX2477	1.50	40 - 60	S2433	.28-.33
571.59631	30	1957	LX2477	1.50	40 - 60	S2433	.28-.33
571.59801	30	1957	LX2477	1.50	50 - 60	S2433	.28-.33
571.59811	30	1957	LX2477	1.50	40 - 60	S2433	.28-.33
571.59441	35	1958	LX2477	1.50	40 - 60	S2433	.28-.33
571.59451	35	1958	LX2477	1.50	40 - 60	S2433	.28-.33

## SEARS (FORMERLY ELGIN OUTBOARD MOTORS Cont'd)

Model Number	H.P.	Year	Ignition Mfg.	Coil Number	Operating Amperage	Continuity Min. Max.	Condenser Number	Capacity Microfarads
571.59821	35	1958	Wico	X11563	0.75	40 - 60	X11337	.26-.30
571.59831	35	1958	Wico	X11563	0.75	40 - 60	X11337	.26-.30
571.59901	35	1958	Wico	X11563	0.75	40 - 60	X11337	.26-.30
571.59911	35	1958	Wico	X11563	0.75	40 - 60	X11337	.26-.30
574.60250	25	1959	Phelon	FG3755	2.5	40 - 60	FG3478	.18-.22
574.60270	25	1959	Phelon	FG3755	2.5	40 - 60	FG3478	.18-.22
574.60400	40	1959	Phelon	FG3755	2.5	40 - 60	FG3478	.18-.22
574.60420	40	1959	Phelon	FG3755	2.5	40 - 60	FG3478	.18-.22
574.60600	60	1959	Phelon	FG3681	1.8	55 - 75	FG3044	.24-.28
574.60610	60	1959	Phelon	FG3681	1.8	55 - 75	FG3044	.24-.28

## ELGIN OUTBOARD MOTORS (Cont'd)

Model No.	HP	Year	Coil No.	Coil Manf.	Manf's No.	Oper. Amp.	Prim. Res. Min. Max.	Sec. Cont. Min. Max.	Cond. No.	Cond. Manf.	Manfs. No.	Capacity Micro-farads
A6BB	3.6	1960	138-134	Phelon	FG3689	2.5		40 - 60	138-115	Phelon	FG3693	.15-.19
A6KB	6.0	1960	134-134	McCul	Same	1.9		30 - 45	134-115	Wico	X12293	.18-.22
C6EB	7.5	1960	134-134	McCul	Same	1.9		30 - 45	134-115	Wico	X12293	.18-.22
A6FB	12.	1960	139-134	Phelon	FG4128	2.5		40 - 60	138-115	Phelon	FG3693	.15-.19
A6GB	25 M	1960	3685-113	Wico	X11352	2.0		40 - 60	3685-115	Wico	X11362	.26-.30
B6GB	25M	1960	3685-113	Wico	X11352	2.0		40 - 60	3685-115	Wico	X11362	.26-.30
C6GB	25E	1960	336B-134	McCul	Same	1.4	.55-.85	40 - 60	335B-115	Wico	X12264	.26-.30
D6GB	25E	1960	436B-134	McCul	Same	1.4	.55-.85	40 - 60	335B-115	Wico	X12264	.26-.30
A6HB	40M	1960	3685-113	Wico	X11352	2.0		40 - 60	3685-115	Wico	XX11362	.26-.30
B6HB	40M	1960	3685-113	Wico	X11352	2.0		40 - 60	3685-115	Wico	X11362	.26-.30
C6HB	40E	1960	336B-134	McCul	Same	1.4	.55-.85	40 - 60	335B-115	Wico	X12264	.26-.30
D6HB	40E	1960	436B-134	McCul	Same	1.4	.55-.85	40 - 60	335B-115	Wico	X12264	.26-.30
C6JB	60	1960	532-134	McCul	Same	1.4		45 - 60	332B-115	McCul	332B-115	.25-.27
D6JB	60	1960	532-134	McCul	Same	1.4		45 - 60	332B-115	McCul	332B-115	.25-.27
61600310	3.6	1961	138-134	Phelon	FG3689	2.5		40 - 60	138-115	Phelon	FG3693	.15-.19
61600610	6.0	1961	A3EC-134	McCul	Same	2.5		45 - 60	A3EC-115	Phelon	FG4477	.15-.19
61600710	7.5	1961	A3EC-134	McCul	Same	2.5		45 - 60	A3EC-115	Phelon	FG4477	.15-.19
61601210	14.1	1961	139-134	Phelon	FG4128	2.5		40 - 60	138-115	Phelon	FG3693	.15-.19
61602510	27.7M	1961	3685-113	Wico	X11352	2.0		40 - 60	3685-115	Wico	X11362	.26-.30
61602510	27.7	1961	3685-113	Wico	X11352	2.0		40 - 60	3685-115	Wico	X11362	.26-.30
61602530	27.7E	1961	C3HC-134	McCul	Same	1.4	.55-.85	45 - 55	335B-115	Wico	X12264	.26-.30
61602530	27.7E	1961	D3HC-134	McCul	Same	1.4	.55-.85	45 - 55	335B-115	Wico	X12264	.26-.30
61604030	43.7E	1961	C3HC-134	McCul	Same	1.4	.55-.85	45 - 55	335B-115	Wico	X12264	.26-.30
61604040	43.7E	1961	D3HC-134	McCul	Same	1.4	.55-.85	45 - 55	335B-115	Wico	X12264	.26-.30
61607030	75.2E	1961	C3JB-134	McCul	Same	1.4	.55-.85	45 - 55	332B-115	McCul	Same	.25-.27
61607040	75.2E	1961	C3JB-134	McCul	Same	1.4	.55-.85	45 - 55	332B-115	McCul	Same	.25-.27

\* Wico

## ELGIN OUTBOARD MOTORS

\*\* Fairbanks-Morse

Motor Model No.	H.P.	Year	Coil No.	Operating Amp.	Continuity Min. Max.	Cond. No.	Capacity Microfarads
571.58241	2	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58791	7-1/2	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58801	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58811	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58802	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58812	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58963	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58973	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58981	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58991	12	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.59541	5-1/2	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.59741	7-1/2	1959	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58321	2	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
571.59221	2	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
571.59271	7-1/2	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
571.59281	7-1/2	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
571.59301	8	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
571.59551	12	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
571.59641	18	1960	* X12302	2.2	40 - 55	* X12303	.16-.20
571.59651	18	1960	* X12302	2.2	40 - 55	* X12303	.16-.20
571.59791	7-1/2	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
571.59881	12	1960	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58322	2	1961	* X12660	1.8	40 - 55	* X12174	.16-.20
571.58331	2	1962	* X12660	1.8	40 - 55	* X12174	.16-.20
571.58341	7-1/2	1962	* X11406	2.1	40 - 60	* X11397	.16-.20
571.58351	3-1/2	1962	* X12660	1.8	40 - 55	* X12174	.16-.20

Year-1962

## SEARS (FORMERLY ELGIN OUTBOARD MOTORS (Cont'd)

Elgin No.	Model No.	H.P.	Mfg.	Coil No.	Elgin No.	Oper. Amps	Primary Resistance Min. Max.	Secondary Resistance Min. Max.	Condenser		Elgin No.	Primary Resistance Min. Max.
									Mfg.	No.		
574-60020	62600310	3.6	Phelon	FG3689	1380134	2.5		40 - 60	Phelon	FG3693	1380115	.15-.19
574-60051	62600610	6.0	Phelon	FG6001	76088	2.5		45 - 60	Phelon	FG4477	76065	.15-.19
574-60081	62600710											
574-60131	62601410	14.1	Phelon	FG4128	1390134	2.5		40 - 55	Phelon	FG3693	1380115	.15-.19
574-60331	62602810	27.7	Wico	X11135	36850113	2.0		45 - 60	Wico	X11362	36850115	.26-.30
574-60351	62602820	27.7	Wico	X11135	36850113	2.0		45 - 60				
574-60332	62602830	27.7	Wico	X11135	36850113	2.0		45 - 60	Wico	X11362	36850115	.26-.30
574-60352	62602830	27.7	Wico	X11135	36850113	2.0		45 - 60	Wico	X11362	36850115	.26-.30
574-60333	62602840	27.7	Wico	X11135	36850113	2.0		45 - 60	Wico	X11362	36850115	.26-.30
574-60353	62602840	27.7	Wico	X11135	36850113	2.0		45 - 60	Wico	X11362	36850115	.26-.30
574-60522	62604432	40.0	McCul	Top	76089	1.4	.55-.85	45 - 60	Wico	X11264	76067	.26-.30
574-60532	62604442	40.0		Bottom	76092	1.4	.55-.85	45 - 60	Wico	X11264	76067	.26-.30
574-60520	62604430	43.7										
574-60530	62604440											
574-61521	62604431	43.7	Wico	X11135	36850113	2.0		45 - 60	Wico	X11362	36850115	.26-.30
574-61531	62604441											
574-60720	62607523	75.0	McCul		76091	1.10	.6 -.9	45 - 55			76066A	.25-.27
574-60730	62607540											
Year - 1963												
574-60021	63600311	3.5	Phelon	FG3689	1380134	2.5		40 - 60	Phelon	FG3693	13800115	.15-.19
574-60090	63600711	7.5	Phelon	FG6001	7688	2.5		45 - 60	Phelon	FG4477	76065	.15-.19
574-60091	63600712	7.5										
574-60140	63601410	14.0	Phelon	FG4128	1390134	2.5		40 - 55	Phelon	FG3693	13800115	.15-.19
574-60340	63602810	28.0	Wico	X11352	36850113	2.0		45 - 60	Wico	X11362	36850115	.26-.30
574-60360	63602830	28.0										
574-60540	63604530	45.0	McCul	Top	76089	1.4	.55-.85	45 - 60	Wico	X11264	76067	.26-.30
574-60550	63604540	45.0	McCul	Bottom	76092	1.4	.55-.85	45 - 60	Wico	X11264	76067	.26-.30
574-60541	63604531	45.0										
574-60551	63604541	45.0										
574-60740	63607530	75.0	McCul		76091	1.10	.6 -.9	45 - 55	Wico	X11264	76067	.26-.30
574-60750	63607540	75.0										
574-60741	63607531	75.0	McCul		76091	1.10	.6 -.9	45 - 55			76066A	.25-.27
574-60751	63607541	75.0									76066A	.25-.27

Year-1964

## SEARS MOTORS

Sears No.	Model No.	H.P.	Mfg.	Coil No.	Sears No.	Oper. Amps	Primary Resistance Min. Max.	Secondary Resistance Min. Max.	Condenser		Sears No.	Capacity Microfarads Min. Max.
									Mfg.	No.		
574-60030	64600310	3.5	Phelon	FG3689	1380134	2.5		40 - 60	Phelon	FG3693	1380115	.15-.19
574-60100	64600710	7.5	Phelon	FG6001	76088	2.5		45 - 60	Phelon	FG4477	76065	.15-.19
574-60150	64601410	14.0	Phelon	FG4128	1390134	2.5		40 - 55	Phelon	FG3693	1380115	.15-.19
574-60370	64602810	28.0	Wico	X11352	36850113	2.0		45 - 60	Wico	X11362	36850115	.26-.30
574-60380	64602830	28.0	McCul		76089-Top	1.4	.55-.85	45 - 60	Wico	X11264	76067	.26-.30
					76092-Bot	1.4	.55-.85	45 - 60	Wico	X11264	76067	.26-.30
574-60560	64604530	45.0	McCul		76089-Top	1.4	.55-.85	45 - 60	Wico	X11264	76067	.26-.30
					76092-Bot	1.4	.55-.85	45 - 60	Wico	X11264	76067	.26-.30
574-60570	64604540	45.0										
574-60760	64607530	75.0	McCul		79566	1.10	.6 -.9	45 - 55			76066A	.26-.27
574-60770	64607540	75.0	McCul		79566						76066A	.25-.27
574-60781	64607531	75.0	McCul		76090	1.10	.6 -.9	45 - 55			76066A	.25-.27
574-60771	64607541	75.0	McCul		76090						76066A	.25-.27
574-60762	64607532	75.0	McCul		76091	1.10	.6 -.9	45 - 55			76066A	.25-.27
574-60772	64607542	75.0	McCul		76091						76066A	.25-.27
Year - 1965-66												
574-60110	65600610	6.0	Phelon	FG6001	76088	2.5		45 - 60	Phelon	FG4477	76065	.15-.19
574-60120	65600710	7.5	Phelon	FG6001	76088	2.5		45 - 60	Phelon	FG4477	76065	.15-.19
574-60580	65604510	45.0	Andov		73875	1.0	1.1-1.4	55 - 65	Wico	X11264	76067	.26-.30
574-60780	65607530	75.0	McCul		79566	1.10	.6 -.9	45 - 55			76066A	.25-.27
574-60790	65607540	75.0	McCul		79566	1.10	.6 -.9	45 - 55			76066A	.25-.27
5929		2.0	Wico	X12660		1.8		40 - 55	Wico	X12174		.16-.20
5930		10.0	Wico	X11406		2.1		40 - 60	Wico	X11397		.16-.20
57159271		12.0	Wico	X14877		1.4	.4 -.6	50 - 60	Wico	X11397		.16-.20
57159414		35.0	Fair	TX2477		1.5	.62-.68	45 - 55	Fair	S2433		.28-.32
57159415		35.0	Fair	TX2477		1.5	.62-.68	45 - 55	Fair	S2433		.28-.32

## SEARS AIR-COOLED OUTBOARD ENGINES

Sears Model No.	H.P.	Sears Coil No.	Mfg.	Coil No.	Operating Amperage	Secondary Continuity Min. Max.	Condenser		Sears No.	Capacity Reading in Microfarads Min. Max.
							Mfg.	No.		
582-595900	3.5	135-13-990	Phelon	FG5770	2.8	40 - 60	Phelon	FG5589A	135-29-990	.15 - .19
582-60900	3.5	135-13-990	Phelon	FG5770	2.8	40 - 60				
582-60910	3.5	135-13-990	Phelon	FG5770	2.8	40 - 60				
582-60920	3.5	135-13-990	Phelon	FG5770	2.8	40 - 60				
582-60940	3.5	135-13-990	Phelon	FG5770	2.8	40 - 60				
582-60941	3.5	135-13-990	Phelon	FG5770	2.8	40 - 60				

## SPIEGEL'S - "BROOKLURE"

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Capacity Microfarads
50-T-3338	12	1957	580207	580416	1.7	30 - 40	580321	.18-.22
50-Z-3325	12	1958	580254	580416	1.7	30 - 40	580321	.18-.22
230-55-22DS	22	1955	580180	580416	1.7	30 - 40	580321	.18-.22
230-55-22DE	22	1955	580180	580416	1.7	30 - 40	580321	.18-.22
50-T-3345	25	1956	580209	580416	1.7	30 - 40	580321	.18-.22
50-T-3346	25	1956	580209	580416	1.7	30 - 40	580321	.18-.22
50-T-3339	25	1957	580209	580416	1.7	30 - 40	580321	.18-.22
50-T-3340	25	1957	580209	580416	1.7	30 - 40	580321	.18-.22
50-Z-3326	25	1958	580274	580416	1.7	30 - 40	580321	.18-.22
50-Z-3327	25	1958	580274	580416	1.7	30 - 40	580321	.18-.22

## SPIEGEL'S - "BROOKLURE"

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Capacity Microfarads
230-50-5	5	1950	590181	375189	1.9	30 - 45	300153	.15-.205
230-51-5S	5	1951-54	580120	580416	1.7	30 - 40	580321	.18-.22
230-51-5D	5	1951-54	580120	580416	1.7	30 - 40	580321	.18-.22
230-55-5D	5	1955	580183	580416	1.7	30 - 40	580321	.18-.22
50-T-3342	5	1956	580120	580416	1.7	30 - 40	580321	.18-.22
50-T-3343	5	1956	580182	580416	1.7	30 - 40	580321	.18-.22
50-T-3343A	5	1956	580182	580416	1.7	30 - 40	580321	.18-.22
50-T-3343B	5	1957	580182	580416	1.7	30 - 40	580321	.18-.22
50-Z-3324	5	1958	580206	580416	1.7	30 - 40	580321	.18-.22
230-50-12	12	1950	580047	580040	1.6	34 - 46	300153	.15-.205
230-51-12D	12	1951-53	580120	580416	1.7	30 - 40	580321	.18-.22
230-51-12S	12	1953	580120	580416	1.7	30 - 40	580321	.18-.22
230-53-12D	12	1954	580153	580416	1.7	30 - 40	580321	.18-.22
50-T-3344	12	1956	580207	580416	1.7	30 - 40	580321	.18-.22

## WARD'S - "SEA KING"

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Capacity Microfarads
GG9004A	3	1955	580128	580416	1.7	30 - 40	580321	.18-.22
GG9004B	3	1955	580128	580416	1.7	30 - 40	580321	.18-.22
GG9000A	3	1956	580128	580416	1.7	30 - 40	580321	.18-.22
GG9006A	3	1957	580128	580416	1.7	30 - 40	580321	.18-.22
GG8962A	3	1958	580128	580416	1.7	30 - 40	580321	.18-.22
GG8919A	3	1959	580128	580416	1.7	30 - 40	580321	.18-.22
GG9013A	5	1955	580183	580416	1.7	30 - 40	580321	.18-.22
GG9001C	5	1955-56	580120	580416	1.7	30 - 40	580321	.18-.22
GG9002A	5	1956	580182	580416	1.7	30 - 40	580321	.18-.22
GG9002B	5	1956	580182	580416	1.7	30 - 40	580321	.18-.22
GG9003A	5	1957	580182	580416	1.7	30 - 40	580321	.18-.22
GG8960A	5	1957	580182	580416	1.7	30 - 40	580321	.18-.22
GG8977A	5	1958	580206	580416	1.7	30 - 40	580321	.18-.22
GG8963A	5	1959	580120	580416	1.7	30 - 40	580321	.18-.22
GG8934A	5	1959	580206	580416	1.7	30 - 40	580321	.18-.22
GG9016A	12	1954-55	580153	580416	1.7	30 - 40	580321	.18-.22
GG9016B	12	1956	580207	580416	1.7	30 - 40	580321	.18-.22
GG9016C	12	1957	580207	580416	1.7	30 - 40	580321	.18-.22
GG8978A	12	1957	580207	580416	1.7	30 - 40	580321	.18-.22
GG9021A	12	1956	580207	580416	1.7	30 - 40	580321	.18-.22
GG9021B	12	1956	580207	580416	1.7	30 - 40	580321	.18-.22
GG9024A	12	1956	580207	580416	1.7	30 - 40	580321	.18-.22
GG8971A	12	1957	580207	580416	1.7	30 - 40	580321	.18-.22
GG8971B	12	1957	580207	580416	1.7	30 - 40	580321	.18-.22
GG9005A	12	1957	580207	580416	1.7	30 - 40	580321	.18-.22
GG8978A	12	1958	580207	580416	1.7	30 - 40	580321	.18-.22
GG8981A	12	1958	580254	580416	1.7	30 - 40	580321	.18-.22
GG8935A	12	1959	580254	580416	1.7	30 - 40	580321	.18-.22

## WARD'S - "SEA KING" (Cont'd)

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Capacity Microfarads
GG9019A	22	1955	580180	580416	1.7	30 - 40	580321	.18-.22
GG9020A	22	1955	580180	580416	1.7	30 - 40	580321	.18-.22
GG9019B	22	1955	580180	580416	1.7	30 - 40	580321	.18-.22
GG9020B	22	1955	580180	580416	1.7	30 - 40	580321	.18-.22
GG9022A	25	1956	580209	580416	1.7	30 - 40	580321	.18-.22
GG9022B	25	1956	580209	580416	1.7	30 - 40	580321	.18-.22
GG9023A	25	1956	580209	580416	1.7	30 - 40	580321	.18-.22
GG9023B	25	1956	580209	580416	1.7	30 - 40	580321	.18-.22
GG9025A	25	1957	580209	580416	1.7	30 - 40	580321	.18-.22
GG9026A	25	1957	580209	580416	1.7	30 - 40	580321	.18-.22
GG8985A	25	1958	580274	580416	1.7	30 - 40	580321	.18-.22
GG8992A	25	1958	580274	580416	1.7	30 - 40	580321	.18-.22
GG8937A	25	1959	580274	580416	1.7	30 - 40	580321	.18-.22
GG8938A	25	1959	580274	580416	1.7	30 - 40	580321	.18-.22
GG8997A	35	1958	580333	580197	1.4	42 - 52	580321	.18-.22
GG8942A	35	1959	580333	580197	1.4	42 - 52	580321	.18-.22
GG8952A	35	1959	580333	580197	1.4	42 - 52	580321	.18-.22
GG8942B	35	1959	580333	580197	1.4	42 - 52	580321	.18-.22
GG8952B	35	1959	580333	580197	1.4	42 - 52	580321	.18-.22

## WARD'S - "SEA KING" (Cont'd)

Model No.	H.P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity No.	Condenser No.	Capacity
GG8804A	3	1960	580128	580416	1.7	30 - 45	580321	.18-.22
GG8822A	5	1960	580206	580416	1.7	30 - 45	580321	.18-.22
GG8823A	15	1960	580270	580197	1.4	42 - 52	580422	.25-.29
GG8834A	25	1960	580274	580416	1.7	30 - 45	580321	.18-.22
GG8835A	25	1960	580274	580416	1.7	30 - 45	580321	.18-.22
GG8836A	35	1960	580307	580197	1.4	42 - 52	580422	.25-.29
GG8837A	35	1960	580307	580197	1.4	42 - 52	580422	.25-.29
-	60	1960	580319	580243	1.7	40 - 55	580256	.37-.41
GG8850A	60	1960	580319	580243	1.7	40 - 55	580256	.37-.41
GG18735A	3	1961	580128	580416	1.7	40 - 55	580321	.18-.22
GG18736A	5	1961	580206	580416	1.7	40 - 55	580321	.18-.22
GG18736B	5	1961	580206	580416	1.7	40 - 55	580321	.18-.22
GG18736C	5	1961	580206	580416	1.7	40 - 55	580321	.18-.22
GG18737A	15	1961	580270	580197	1.4	42 - 52	580422	.25-.29
GG18737B	15	1961	580270	580197	1.4	42 - 52	580422	.25-.29
GG18738A	25	1961	580274	580416	1.7	30 - 45	580321	.18-.22
GG18740A	25	1961	580274	580416	1.7	30 - 45	580321	.18-.22
GG18738B	25	1961	580274	580416	1.7	30 - 45	580321	.18-.22
GG18740B	25	1961	580274	580416	1.7	30 - 45	580321	.18-.22
GG18742A	40	1961	580333	580197	1.4	42 - 52	580321	.18-.22
GG18744A	40	1961	580333	580197	1.4	42 - 52	580321	.18-.22
-	60	1961	580319	580243	1.7	40 - 55	580256	.37-.41
GG18746A	60	1961	580319	580243	1.7	40 - 55	580256	.37-.41
-	60	1961	580319	580243	1.7	40 - 55	580256	.37-.41
GG18748A	60	1961	580319	580243	1.7	40 - 55	580256	.37-.41
GG18735B	3	1962	580128	580416	1.7	30 - 45	580321	.18-.22
GG18736D	5	1962	580206	580416	1.7	30 - 45	580321	.18-.22
GG18737C	15	1962	580434	580416	1.7	30 - 45	580422	.25-.29
GG18737D	15	1962	580254	580416	1.7	30 - 45	580321	.18-.22
GG18738C	25	1962	580274	580416	1.7	30 - 45	580321	.18-.22
-	25	1962	580274	580416	1.7	30 - 45	580321	.18-.22
GG18742B	40	1962	580415	580416	1.7	30 - 45	580422	.25-.29

## WARD'S - "SEA KING" (Cont'd)

Model No.	H. P.	Year	Magneto No.	Coil No.	Operating Amperage	Continuity No.	Condenser No.	Capacity
GG187446	40	1962	580415	580416	1.7	30 - 45	580422	.25-.29
GG18746C	60	1962	580319	580243	1.7	40 - 55	580256	.37-.41
GG18748C	60	1962	580319	580243	1.7	40 - 55	580256	.37-.41

## WARD'S - SEA KING MOTORS

Model	Coil No.	Operating Amperage	Secondary Continuity Min. Max.	Condenser No.	Capacity Microfarads Min. Max.
19068	X12940	1.4	50 - 60	X12174	.16-.20
19072	X11406	2.1	40 - 60	X11397	.16-.20
19076	X11406	2.1	40 - 60	X11397	.16-.20
19084	X14381	1.4	50 - 60	X12303	.16-.20
19088-					
19089	LX2477	1.5	40 - 60	S2433	.28-.36
19088A-					
19089A	TX2477	1.5	45 - 55	S2433	.28-.36
19092-					
19093	X11563	0.75	40 - 60	X11337	.26-.30
19096	X11563	0.75	40 - 60	X12647	.26-.30

## WESTERN AUTO - WIZARD MOTORS

Wizard No.	Model No.	H.P.	Mfg.	Coil No.	Wizard No.	Oper. Amps	Primary Resistance Min. Max.	Secondary Resistance Min. Max.	Condenser Mfg.	Wizard No.	Capacity Micro. Min. Max.
MLM-6903A	A7B8	3.6	Phelon	FG3689	1380134	2.5		40 - 60	Phelon	FG3693	.15-.19
MLM-6908A	A7EB	7.5	McCul		1340134	2.5		40 - 60	Wico	X12293	.18-.22
	C7EB										
MLM-6912A	A7FB	12.0	Phelon	FG4128	1390134	2.5		40 - 55	Phelon	FG3693	.15-.19
MLM-6930A	A7GB	25.0	Wico	X11352	36850113	2.0		40 - 60	Wico	X11362	.26-.30
MLM-6932A	C7GB		McCul	4368-134	76096-Top	1.4	.55-.85	45 - 60	Wico	X11362	.26-.30
MLM-6933A	D7G8		McCul	3368-134	76095-Bot.	1.4	.55-.85	45 - 60	Wico	X11362	.26-.30
MLM-6944A	C7HB	40.0	McCul	4368-134	76096	1.4	.55-.85	45 - 60	Wico	X12264	.26-.30
MLM-6945A	D7HB										
MLM-6960A	C7JB	60.0	McCul	C3JB-232	76159	1.4	.55-.85	45 - 60		76066	.25-.27
MLM-6961A	D7JB		McCul	C3JB-232	76159	1.4	.55-.85	45 - 60		76066	.25-.27
MLM-6960B	C7JBI	60.0									
MLM-6961B	D7JBI										
Year - 1961											
MLM-6903B	61700310	3.6	Phelon	FG3689	1380134	2.5		40 - 60	Phelon	FG3693	.15-.19
MLM-6908C	61700710	7.5	Phelon	FG6001	76088	2.5		45 - 60	Phelon	FG4477	.15-.19
Year - 1962											
MLM-6903C	62700310	3.6	Phelon	FG6001	76088	2.5		45 - 60	Phelon	FG4477	.15-.19
MLM-6914	62701410	14.0	Phelon	FG4128	1390134	2.5		40 - 55	Phelon	FG3693	.15-.19
Year - 1963											
MLM-6904B	64700310	3.5	Phelon	FG3689	1380134	2.5		40 - 60	Phelon	FG3693	.15-.19
MLM-6909B	64700710	7.5	Phelon	FG6001	76088	2.5		45 - 60	Phelon	FG4477	.15-.19
MLM-6915B	64701410	14.0	Phelon	FG4128	1390134	2.5		40 - 55	Phelon	FG3693	.15-.19
Year - 1964											
MLM-6904B	64700310	3.5	Phelon	FG3689	1380134	2.5		40 - 60	Phelon	FG3693	.15-.19
MLM-6909B	64700710	7.5	Phelon	FG6001	76088	2.5		45 - 60	Phelon	FG4477	.15-.19
MLM-6915B	64701410	14.0	Phelon	FG4128	1390134	2.5		40 - 55	Phelon	FG3693	.15-.19

## STIHL CHAIN SAW COIL SPECIFICATIONS

Coil No.	Stihl #	Operating Amperage	Secondary Continuity Min. Max.
9B00B	1106-404-3210	1.3	40 - 50
10B0	1107-404-3200	1.2	50 - 60
13B00	07-08-040	1.5	45 - 55

## STIHL CHAIN SAW CONDENSER SPECIFICATION

Condenser No.	Capacity Reading in Microfarads Min. Max.
9B01 . . . . .	.14-.18
10B00 . . . . .	.11-.15

WICO MAGNETO COILS SPECIFICATIONS

Coil No.	Type	Operating Amperage	Secondary Continuity
IFAX-103 . . . . .	F. Right Hand . . . . .	1.40 . . . . .	35 - 55
IKBX-103 . . . . .	EK-Right Hand . . . . .	1.60 . . . . .	
IXDX-103 . . . . .	OC-Right Hand . . . . .	1.35 . . . . .	
IFAX-104 . . . . .	F. Left Hand . . . . .	1.40 . . . . .	
IKBX-104 . . . . .	EK-Left Hand . . . . .	1.60 . . . . .	35 - 55
IXDX-104 . . . . .	OC-Left Hand . . . . .	1.35 . . . . .	
18-X123C . . . . .	FGB-Left Hand . . . . .	1.50 . . . . .	
18-X123D . . . . .	FGB-Right Hand . . . . .	1.50 . . . . .	
X1910 . . . . .	AH-AII Models . . . . .	1.50 . . . . .	45 - 65
X2005 . . . . .	AP . . . . .	1.40 . . . . .	
X2156 . . . . .	FW . . . . .	1.50 . . . . .	30 - 50
X2631 . . . . .	OC-Right Hand-HD . . . . .	1.40 . . . . .	40 - 60
X2632 . . . . .	OC-Left Hand-HD . . . . .	1.40 . . . . .	40 - 60
X2766 . . . . .	A & C AII Models . . . . .	2.10 . . . . .	35 - 55
X2770 . . . . .	AP . . . . .	1.50 . . . . .	50 - 70
X2770B . . . . .	APH . . . . .	1.90 . . . . .	50 - 70
X2937 . . . . .	O. FW . . . . .	2.40 . . . . .	
X3040 . . . . .	FW . . . . .	2.80 . . . . .	
X3040A,B,C,D . . . . .	FW . . . . .	1.50 . . . . .	50 - 70
X3430 . . . . .	O. EM . . . . .	1.40 . . . . .	
X3682 . . . . .	J & JEM . . . . .	1.40 . . . . .	45 - 65
X4366B . . . . .	O. R.E.M. . . . .	1.30 . . . . .	
X4658 . . . . .	FW . . . . .	1.90 . . . . .	40 - 60
X4658B . . . . .	FW . . . . .	1.55 . . . . .	40 - 60
X4791 . . . . .	FW . . . . .	2.30 . . . . .	50 - 70
X4943 . . . . .	FW . . . . .	1.50 . . . . .	35 - 55
X5345 . . . . .	FW . . . . .	1.50 . . . . .	40 - 60
X5460C . . . . .	FW . . . . .	1.50 . . . . .	30 - 50
X5700 & 5700C . . . . .	XH . . . . .	1.70 . . . . .	40 - 60
X5700B . . . . .	FW . . . . .	1.70 . . . . .	40 - 60
X5953 . . . . .	FW . . . . .	2.20 . . . . .	40 - 60
X6111 . . . . .	FW . . . . .	1.60 . . . . .	35 - 55
*X6664 . . . . .	O. XH-2D Use X11600 . . . . .	1.80 . . . . .	40 - 60
X6718 . . . . .	FW . . . . .	2.50 . . . . .	40 - 60
X6762 . . . . .	XH-1-Xh-1295 B & C only . . . . .	1.40 . . . . .	45 - 65
X6872B . . . . .	XB-Short Lead to GRD . . . . .	2.10 . . . . .	
X6877B . . . . .	O. XB . . . . .	1.45 . . . . .	
X6933 . . . . .	O. FW . . . . .	1.75 . . . . .	
X6936 . . . . .	XHD4 and XVD6 . . . . .	1.50 . . . . .	35 - 55
X6985 . . . . .	FW . . . . .	1.40 . . . . .	30 - 50
X7120 . . . . .	FW . . . . .	1.80 . . . . .	40 - 60
X7233 . . . . .	FW . . . . .	1.70 . . . . .	40 - 60
X7325 . . . . .	FW . . . . .	1.70 . . . . .	35 - 55
X7345 . . . . .	FW . . . . .	1.80 . . . . .	40 - 60
X7438 . . . . .	FW . . . . .	1.55 . . . . .	
X7453 . . . . .	O. FW Use X4658B . . . . .	1.80 . . . . .	30 - 50
X7467 . . . . .	FW . . . . .	2.10 . . . . .	30 - 50
X7500 . . . . .	FW . . . . .	1.90 . . . . .	38 - 58
X7536 . . . . .	O. FW . . . . .	1.70 . . . . .	
X7560 . . . . .	O. XHD-1 . . . . .	2.30 . . . . .	
X7585 . . . . .	FW . . . . .	1.80 . . . . .	
X7680 . . . . .	O. RES . . . . .	1.90 . . . . .	
X7700 . . . . .	O. XH . . . . .	1.70 . . . . .	
X7886B . . . . .	XH1 . . . . .	2.20 . . . . .	30 - 50
X7895B . . . . .	SHX-2D . . . . .	2.60 . . . . .	45 - 65
X7895C . . . . .	SHX-2D . . . . .	1.6 . . . . .	60 - 70

## WICO MAGNETO COIL SPECIFICATIONS (Cont'd)

Coil No.	Type	Operating Amperage	Secondary Continuity
X8545 . . . . .	XH1 . . . . .	2.00 . . . . .	40 - 60 . . . . .
X8668 . . . . .	FW . . . . .	1.70 . . . . .	40 - 60 . . . . .
X8786 . . . . .	FW . . . . .	1.80 . . . . .	30 - 50 . . . . .
X8795 . . . . .	FW . . . . .	1.80 . . . . .	30 - 50 . . . . .
X8798 . . . . .	XB . . . . .	2.20 . . . . .	45 - 65 . . . . .
X8877 . . . . .	FW . . . . .	2.00 . . . . .	
*X8964 . . . O . .	XH-2D Use X11600 . . . . .	2.30 . . . . .	
X9055 . . . . .	FW . . . . .	2.10 . . . . .	35 - 55 . . . . .
X9144 . . . . .	FW . . . . .	1.60 . . . . .	50 - 70 . . . . .
X9295 . . . . .	B (center core only) . . . . .	2.30 . . . . .	35 - 55 . . . . .
X9295 . . . . .	B (On stator both cores) . . . . .	2.10 . . . . .	35 - 55 . . . . .
X9533 . . . . .	FW . . . . .	2.20 . . . . .	30 - 50 . . . . .
X9636B . . . . .	FW . . . . .	1.55 . . . . .	45 - 55 . . . . .
X9692 . . . . .	FW . . . . .	2.30 . . . . .	35 - 55 . . . . .
X9697 . . . O . .	FW . . . . .	2.30 . . . . .	
X9767 . . . . .	FW . . . . .	1.80 . . . . .	35 - 55 . . . . .
X9965 . . . . .	FW . . . . .	1.8 . . . . .	40 - 55 . . . . .
X11049 . . . . .	FW . . . . .	1.85 . . . . .	30 - 50 . . . . .
X11135 . . . . .	FW . . . . .	2.0 . . . . .	45 - 60 . . . . .
X11180 . . . . .	FW . . . . .	1.80 . . . . .	40 - 55 . . . . .
X11205 . . . . .	FW . . . . .	2.0 . . . . .	40 - 55 . . . . .
X11260 . . . . .	FW . . . . .	1.8 . . . . .	40 - 55 . . . . .
X11352 . . . . .	FW . . . . .	2.00 . . . . .	40 - 60 . . . . .
X11406 . . . . .	FW . . . . .	2.10 . . . . .	40 - 60 . . . . .
X11477 . . . . .	FW . . . . .	2.00 . . . . .	40 - 60 . . . . .
**X11563 (German Bosch #TJ 12/1 or TK12A3) . . . . .		0.75 . . . . .	40 - 60 . . . . .
*X11600 (X6664 & X8964) . . . . .		1.90 . . . . .	40 - 60 . . . . .
X11654 . . . . .	FW . . . . .	2.1 . . . . .	40 - 55 . . . . .
X11856 . . . . .	FW . . . . .	1.8 . . . . .	40 - 55 . . . . .
X12254 . . . . .	FW . . . . .	1.8 . . . . .	45 - 60 . . . . .
X12302 . . . . .	FW . . . . .	2.2 . . . . .	40 - 55 . . . . .
X12325 . . . . .	FW . . . . .	1.8 . . . . .	40 - 55 . . . . .
X14171B . . . . .	FW . . . . .	1.3 . . . . .	50 - 60 . . . . .
X15043 . . . . .	FW . . . . .	2.8 . . . . .	50 - 70 . . . . .
X16343 . . . . .	FW . . . . .	1.3 . . . . .	50 - 60 . . . . .
X16669 . . . . .	FW . . . . .	1.3 . . . . .	50 - 60 . . . . .
X16797 . . . . .	FW . . . . .	1.8 . . . . .	50 - 60 . . . . .
X16809 . . . . .	FW . . . . .	1.3 . . . . .	50 - 60 . . . . .
X16825 . . . . .	FW . . . . .	1.3 . . . . .	50 - 60 . . . . .

Wico (Green) XH-1 (Replaced by X5700)

\*Ground one lead.

\*\*When testing coil X11563 (German Bosch #TJ 12/1 or TK 12A3), disconnect the Internal Battery and connect Analyzer Leads to a 12 Volt Storage Battery by attaching our Part No. 55-174 in series with one side of the Battery Lead. DO NOT use the 12 volts for any other tests.

## WICO MAGNETO CONDENSER SPECIFICATIONS

Condenser	Magneto	Capacity Reading in Microfarads Min. Max.
12-X235 . . . . .	EK, OC, Old Style . . . . .	.10-.15
X1413 . . . . .	A, C, J, JEM . . . . .	.16-.20
X2186 . . . . .	FW . . . . .	.16-.20
X2394 . . . . .	FG . . . . .	.20-.22
X2413 . . . . .	AP-Left Hand . . . . .	.16-.20
X2414 . . . . .	AP . . . . .	.20-.24
X2664 . . . . .	FG . . . . .	.16-.20
X2981 . . . . .	FW . . . . .	.16-.20
X3222 . . . . .	EM . . . . .	.16-.20
X3517 . . . . .	AP-Right Hand . . . . .	.16-.20
X4034 . . . . .	FW . . . . .	.16-.20
X4215 . . . . .	FW . . . . .	.16-.20
X5321 . . . . .	FW . . . . .	.16-.20
X5342 . . . . .	FW . . . . .	.30-.34
X5463 . . . . .	FW . . . . .	.16-.20
X5614 . . . . .	XH, XV . . . . .	.16-.20
X5800 . . . . .	FW . . . . .	.16-.20
X5833 . . . . .	FW . . . . .	.16-.20
X5847 . . . . .	FW . . . . .	.16-.20
X5999 . . . . .	A, C, J, JEM . . . . .	.16-.20
X6028 . . . . .	FW . . . . .	.16-.20
X6029 . . . . .	EM . . . . .	.16-.20
X6030 . . . . .	FW . . . . .	.16-.20
X6091 . . . . .	FW . . . . .	.16-.20
X6138 . . . . .	APH . . . . .	.30-.34
EX6367 . . . . .	Edison, RM-2, 4, 6 . . . . .	.16-.20
EX6369 . . . . .	Edison, RM-1, 2 . . . . .	.16-.20
X6494 . . . . .	EK, OC . . . . .	.16-.20
X6874 . . . . .	XB . . . . .	.30-.34
X6916 . . . . .	XHD, XVD . . . . .	.30-.34
X6937 . . . . .	. . . . .	.16-.20
X6977 . . . . .	XB . . . . .	.30-.34
EX6980 . . . . .	RM . . . . .	.16-.20
X7228 . . . . .	FW . . . . .	.16-.20
X7331 . . . . .	FW . . . . .	.10-.15
X7372 . . . . .	FW . . . . .	.30-.34
X7461 . . . . .	FW . . . . .	.10-.15
X7529 . . . . .	FW . . . . .	.16-.20
X7720 . . . . .	XHS . . . . .	.16-.20
X8680 . . . . .	XHS-1, XHS-2 . . . . .	.16-.20
X8807 . . . . .	FW . . . . .	.30-.34
X8959 . . . . .	FW . . . . .	.16-.20
X9100 . . . . .	FW . . . . .	.26-.30
X9106 . . . . .	FW . . . . .	.18-.23
X9182 . . . . .	FW . . . . .	.26-.30
X9263 . . . . .	B . . . . .	.30-.34
X9293 . . . . .	XVS . . . . .	.26-.30
X9327 . . . . .	FW . . . . .	.26-.30
X9451 . . . . .	FW . . . . .	.16-.20
X9686 . . . . .	XHS-1 . . . . .	.18-.20
X9699 . . . . .	XHS . . . . .	.26-.30
X10400 . . . . .	REM . . . . .	.18-.23
X11000 . . . . .	FW . . . . .	.16-.23
X11181 . . . . .	FW . . . . .	.16-.20
X11206 . . . . .	. . . . .	.30-.34
X11264 . . . . .	. . . . .	.26-.30

## WICO MAGNETO CONDENSER SPECIFICATIONS (Cont'd)

Condenser	Magneto	Capacity Reading in Microfarads Min., Max.
X11337		.26-.30
X11362		.26-.30
X11397		.16-.20
X11672		.16-.20
X11818		.58-.62
X12174		.16-.20
X12264		.26-.30
X12293		.18-.22
X12302		.16-.20
X12303		.16-.20
X12508		.16-.20
X12513		.16-.20
X12647		.16-.20
X12984		.30-.34
X13299		.16-.20
X14497		.16-.20
X14590		.24-.28
X14680	SHX	.30-.34
X15041	FW	.16-.20
X16264	FW	.16-.20
X16329	FW	.16-.20
X16345	FW	.16-.20
X16410	FW	.16-.20
X30028	DB	.18-.23
X30028B	DB	.18-.23
X30188	DB (12 volt)	.30-.34
X30280		.26-.30
X30280B		.26-.30

## WISCONSIN MOTOR CORPORATION

Engine Model	Magneto Mfr.	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Microfarad Capacity
VR4D	F-M	X4A7B	R-2477C	1.70	40 - 60	AX-M-R2433	.18-.23
VG4D	F-M	XZE4B7	RS-2477C	1.70	40 - 60	MX2433X	.28-.35
	F-M	X4B7A	R-2477C	1.70	40 - 60	AX-M-R2433	.18-.23
	Wico	XH4	X5700	1.70	40 - 60	X5614	.16-.20
VP4D	F-M	ZV4B7	QS-2477C	1.65	40 - 65	SYX2433	.28-.33
	F-M	ZVE4B7	QS-2477C	1.65	40 - 65	EX2433	.17-.23
	Wico	XH4	X5700	1.70	40 - 60	X5614	.16-.20
VH4	Wico	XHG4	X5700	1.70	40 - 60	X5614	.16-.20
	F-M	X4B7A	R-2477C	1.50	40 - 60	AX-M-R2433	.18-.23
VE4 & VF4	F-M	XZE4B7	RS-2477C	1.70	40 - 60	MX2433X	.28-.35
	Wico	XH4	X5700	1.70	40 - 60	X5614	.16-.20
	F-M	ZV4B7	QS-2477C	1.65	40 - 65	SYX2433	.28-.33
	F-M	ZVE4B7	QS-2477C	1.65	40 - 65	EX2433	.17-.23
MVH4D	F-M	XZE4B7	RS-2477C	1.70	40 - 60	MX2433X	.28-.35
TH & THD	Wico	XH-20	X11600	1.90	40 - 60	X6916	.30-.34
	F-M	X1-2B7	Q2477C	1.70	50 - 70	X2433	.17-.23
TE & TF	F-M	XE1-2B7C	Q2477C	1.70	50 - 70	X2433	.17-.23
	Wico	XH-2D	X11600	1.90	40 - 60	X6916	.30-.34
AEN & AENS	F-M	X1-2B7	Q2477C	1.70	50 - 70	X2433	.17-.23
	F-M	XE1-2B7C	Q2477C	1.70	50 - 70	X2433	.17-.23
	Wico	XH1	X5700	1.70	40 - 60	X6916	.30-.34
			X6762	2.50		X5614	.16-.20
	F-M	XD1B7S	S-2477C	1.70	50 - 60	AX-M-R2433	.18-.23
	F-M	XD1B7U	S-2477C	1.70	50 - 60	SYX-2433	.28-.33
	F-M	XDE1B7S	S-2477C	1.70	50 - 60	SYX-2433	.28-.33
		XDE170	S-2477C	1.70	50 - 60	SYX-2433	.28-.33
AENL	Wico	XH1	X5700B	1.70	40 - 60	X6916	.30-.34
	F-M	XD1B7S	S-2477C	1.70	50 - 60	AX-M-R2433	.18-.23
	F-M	XD1B7U	S-2477C	1.70	50 - 60	AX-M-R2433	.18-.23
	F-M	XDE1B7S	S-2477C	1.70	50 - 60	SYX2433	.28-.33
	F-M	XE17U	S-2477C	1.70	50 - 60	SYX2433	.28-.33

## WISCONSIN MOTOR CORPORATION (Cont'd)

Engine Model	Magneto Mfgr.	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Microfarad Capacity
AF & AG & AH	Wico	XHT	X5700	1.70	40 - 60	X6916	.30-.34
	Wico	XHT	X6762	2.50		X5614	.16-.20
	F-M	J1A7	L-2477	1.80	35 - 55	M2433	.18-.22
AD-AE-AES	Wico	XH-1	X5700	1.70	40 - 60	X6916	.30-.34
	Wico		X6762	2.50		X5614	.16-.20
	F-M	J1A7	L-2477	1.80	35 - 55	M2433	.18-.22
	F-M	X1A7	L-2477C	1.80	35 - 55	R-2433	
AGN	Wico	XHT	X5700B	1.70	40 - 60	X6916	.30-.34
	F-M	XD1B7R	T-2477C	1.90	40 - 60	AX-M-R2433	.18-.23
	F-M	PE1B7R	T-2477C	1.90	40 - 60	SKY2433	.28-.33
AFH & AGH & AHH	Wico	XH-1	X6762	2.50		X6916	.30-.34
	Wico	XH-1	X5700	1.70	40 - 60	X5614	.16-.20
	F-M	XE1A7F	S-2477C	1.90	45 - 65	AX-M-R2433	.18-.23
	F-M	XD1B7	S-2477C	1.90	45 - 65	AX-M-R2433	.18-.23
	F-M	X1A7	T-2477C	1.90	40 - 60	AX-M-R2433	.18-.23
	F-M	XE1A7F	T2477C	1.90	40 - 60	AX-M-R2433	.18-.23
	F-M	X1B7E	T-2477C	1.90	40 - 60	AX-M-R2433	.18-.23
ADH & AE & AEH & AEHS	Wico	XH1	X6762	2.50		X6916	.30-.34
	Wico	XH1	X5700	1.70	40 - 60	X5614	.16-.20
	F-M	XD1B7	S-2477C	1.90	45 - 65	R2433	.18-.23
	F-M	XDE1B7P	S-2477C	1.90	45 - 65	AX-M-R2433	.18-.23
	F-M	X1A7	S-2477C	1.90	45 - 65	AX-M-R2433	.18-.23
	F-M	XE1A7E	S-2477C	1.90	45 - 65	AX-M-R2433	.18-.23
	F-M	X1B7E	S-2477C	1.90	45 - 65	AX-M-R2433	.18-.23
ACN & BKN	Wico	XH1	X6762	2.50		X6916	.30-.34
						X5614	.16-.20

## WISCONSIN MOTOR CORPORATION (Cont'd)

Engine Model	Magneto Mfgr.	Magneto No.	Coil No.	Operating Amperage	Continuity Min. Max.	Condenser No.	Microfarad Capacity	
131	F-M	XD1B7S	S-2477C	1.90	45 - 65	AX-M-R2433	.18-.23	
	F-M	XD1B7U	S-2477C	1.90	45 - 65	AX-M-R2433	.18-.23	
	F-M	XDE1B7S	S-2477C	1.90	45 - 65	SYX-2433	.28-.33	
	F-M	XDE1B7U	S-2477C	1.90	45 - 65	SYX-2433	.28-.33	
	Wico	XH1	X5700	1.70	40 - 60	X6916	.30-.34	
	Wico	XH1	X6762	2.50		X5614	.16-.20	
	F-M	XD1B7	H-2477C	1.90	45 - 65	R2433	.17-.23	
	F-M	XD1B7D	H-2477C	1.90	45 - 65	R2433	.17-.23	
	F-M	XDE1B7P	H-2477C	1.90	45 - 65	R2433	.17-.23	
	F-M	X1A7	L-2477C	1.80	35 - 55	R2433	.17-.23	
	F-M	X1A7E	L-2477C	1.80	35 - 55	R2433	.17-.23	
	F-M	X1A7F	L-2477C	1.80	35 - 55	R2433	.17-.23	
	F-M	XE1A7F	L-2477C	1.80	35 - 55	R2433	.17-.23	
	F-M	J1A7	L-2477	1.80	35 - 55	M2433	.18-.22	
	F-M	J1B7	L-2477	1.80	35 - 55	M2433	.18-.22	
	MTHD	Wico	XHS-2D	X7895	2.60	X7720	.16-.20	
		F-M	PE1-2B7C	QT-2477C	1.70	40 - 65	LV-2433	.38-.43
	MTFD	Wico	XHS-2D	X7895	2.60	X7720	.16-.20	
	MVE4D &	F-M	XVE4B7Q	H-2477	1.70	40 - 60	S2433	.28-.32
	MVF4D	F-M	ZVE4B7	QS-2477C	1.65	40 - 65	EX2433	.17-.23
	TFM	Wico	XH-2D	X6664	2.30	X6916	.30-.34	
		F-M	JF2B7	G2477	1.55	X5614	.16-.20	
	ABM &	F-M	X1A7E	H-2477C	1.90	M2433	.18-.22	
	AKM	F-M	XD1B7D	H-2477C	1.90	R2433	.17-.23	
					40 - 65	R2433	.17-.23	

# INDEX

Armature Ground Test . . . . .	17
Automotive Type Coils . . . . .	10
Breaker Point Test . . . . .	15
Coil Continuity Test . . . . .	8
Coil Ground Test . . . . .	9
Coil Power Test . . . . .	5
Coil High Speed Test . . . . .	6
Coil Surface Insulation Test . . . . .	7
Condenser Test . . . . .	11-12-13-14-16
Continuity Test . . . . .	19
Description, Service Notes and Operating Instructions . . . . .	1-4
Distributor Rotor Test . . . . .	22
Evinrude-Johnson Uni-charger or AC Generator - "Alternator" . . . . .	27-40
Field Winding Ground Test . . . . .	25
Ground Armature or Field Winding . . . . .	26
Ground Brush Test . . . . .	25
High Tension Leakage-Crack Test . . . . .	21
Primary Resistance Test . . . . .	8A
Resistance Test . . . . .	19
Resistor or Ballist Test . . . . .	20
Service Hints . . . . .	43-44
Spark Test . . . . .	18
Starter Solenoid Test . . . . .	18
Testing Coil with Two Secondary . . . . .	23
Testing Conventional Type Magneto s . . . . .	23
Testing Selenium Rectifiers . . . . .	24
Timing . . . . .	16-17

## COIL AND CONDENSER SPECIFICATIONS

AMC . . . . .	45
Atlas . . . . .	46
Auto-lite . . . . .	47
Bendix-Scintilla . . . . .	48
American Bosch . . . . .	51
German Bosch . . . . .	54
Robert Bosch . . . . .	54-55
Briggs & Stratton . . . . .	56
British Seagull . . . . .	57
Bridgestone . . . . .	57
Bundy . . . . .	58
J.I. Case . . . . .	58
Chrysler . . . . .	59-66
Clinton . . . . .	67
Commodore . . . . .	68
Continental . . . . .	68
Cushman . . . . .	69

## INDEX - cont'd.

Delco-Remy .....	69
Eaton-Volvo .....	69
Echlin .....	70
Edison Splitdorf .....	70
Eisemann .....	71-74
Elgin .....	110-114
Evinrude - See Johnson	
Fairbanks-Morse .....	75-76
Ford - See Auto-Lite	
Gale .....	77-81
Gambles .....	82
Goodyear .....	83-84
Homelite .....	84-85
Honda .....	85
International Harv. ....	85
John Deere .....	85
Johnson .....	86-87
Kiekhaefer-Mercury .....	88
Kohler .....	89
Lauson .....	90-91
Lawn Boy .....	91
Mallory .....	92
McCullach .....	93-104
Oliver .....	106
O & R .....	106
Onan (Division of Studebaker) .....	105
OMC - See Johnson	
Phelon .....	107-108
Pioneer .....	109
Pioneer-Genie .....	109
Polaris - See German Bosch	
Prestolite - See Auto-Lite	
Ronco .....	109
Sears .....	110-116
Ski-Doo - See German Bosch	
Spiegel .....	117-118
Stihl Chain Saw .....	124
Wards-Sea-King .....	119-122
West Bend - See Chrysler	
Western Auto .....	123
Wico .....	125-128
Wisconsin Mtr. ....	129-131

□

○

○



## 1970 BULLETIN

### AMERICAN BOSCH COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
TCF 12 A 1	1.5	10	14	52	62

### ANDOVER CORPORATION COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
A316475	1.0	1.7	2.3	65	75
A85475-1	1.0	1.6	2.0	63	72
A85475-2	1.0	1.6	2.0	63	72
****A91475-1	1.0	3.0	3.6	50	60
****2A91475-2	1.2	3.0	4.0	53	63

\*\*\*\*To test coil, disconnect the internal battery and connect leads to a 12 volt storage battery. Do not use the 12 volts for any other tests as all other readings will be incorrect.

### BENDIX SCINTILLA COIL SPECIFICATIONS

Coil No.	Operating Amperage	Secondary Continuity	
		Min.	Max.
10-160396	1.8	30	40

### BENDIX SCINTILLA CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading	
	in Microfarads	
10-79168Y	.18	.23
10-126216	.27	.31

## BOMBARDIER (SKI-DOO) COIL &amp; CONDENSER SPECIFICATIONS

Application	Year	Description and Number	Operating Amperage	Primary Resistance Min.	Primary Resistance Max.	Secondary Continuity Min.	Secondary Continuity Max.	Resistance	Capacity Reading In Microfarads Min. Max.
****7 H.P. (165 C.C.)	63-66 incl.	Ignition #402-4038	1.0	1.8	2.1	35	45	.4	.13 .17
7 H.P. (165 C.C.)	63-66 incl.	Lighting #402-4083							
7 H.P. (165 C.C.)	63, 64, 65	Condenser #402-4067							
****8 H.P. (250 C.C.)	63-66 incl.	Ignition #402-4040	1.0	1.5	1.9	40	50	.7	.26 .30
8 H.P. (250 C.C.)	63-66 incl.	Lighting #402-4084							
8 H.P. (250 C.C.)	63-66 incl.	Condenser #402-4068							
****165 C.C.	67	Ignition #402-4038	1.0	1.8	2.1	35	45	.4	.13 .17
165 C.C.	67	Lighting #402-4083							
165 C.C.	67	Condenser #402-4067							
****250-300 C.C.	67	Ignition #402-4040	1.0	1.5	1.9	40	50	.7	.26 .30
250-300 C.C.	67	Lighting #402-4084							
250-300 C.C.	67	Condenser #402-4068							
Alpine 300-370 C.C.	67	Lighting #402-7015						1.0	
Alpine 300-370 C.C.	67	Generator #402-7013						1.25	
Alpine 300-370 C.C.	67	Condenser #402-4068							.26 .30
****250-300 Alpine 300 C.C.	68	Ignition #402-4040	1.0	1.5	1.9	40	50	.7	.26 .30
250-300 Alpine 300 C.C.	68	Lighting #402-4084							
250-300 Alpine 300 C.C.	68	Condenser #402-4068							
****Olympique 370	68	Ignition #402-7008	.6	1.6	2.0	35	45		
Olympique 370	68	Lighting #402-7015						1.0	
Olympique 370	68	Generator #402-7013						1.25	
Olympique 370	68	Condenser #402-4068							.26 .30
****Olympique 370E-Alpine 370E	68	Ignition #402-7008	.6	1.6	2.0	35	45		
Olympique 370E-Alpine 370E	68	Lighting #402-4107						1.35	
Olympique 370E-Alpine 370E	68	Generator #402-7013						1.25	
Olympique 370E-Alpine 370E	68	Condenser #402-4068							.26 .30
****Olympique 300-320-292 (12/35S)335 (320 SS)	69	Ignition #402-4040	1.0	1.5	1.9	40	50		

## BOMBARDIER (SKI-DOO) COIL &amp; CONDENSER SPECIFICATIONS (Cont.)

Application	Year	Description and Number	Operating Amperage	Primary Resistance		Secondary Continuity		Resistance	Capacity Reading In Microfarads	
				Min.	Max.	Min.	Max.		Min.	Max.
Olympique 300-320-292 (12/355)335 (320 SS)	69	Lighting #402-4084						.7		
Olympique 300-320-292 (12/355)335 (320 SS)	69	Condenser #402-4068						.26	.30	
****Olympique 320E	69	Ignition #402-7008	.6	1.6	2.0	35	45			
Olympique 320E	69	Lighting #402-4084						.7		
Olympique 320E	69	Generator #402-7063						3.5		
Olympique 320E	69	Condenser #402-4068						.26	.30	
****Olympique 370-Alpine 370-370E	69	Ignition #402-7008	.6	1.6	2.0	35	45			
Olympique 370-Alpine 370-370E	69	Lighting #402-4107						1.35		
Olympique 370-Alpine 370-370E	69	Generator #402-4180						3.5		
Olympique 370-Alpine 370-370E	69	Condenser #402-4068						.26	.30	
****Nordic 371-371E, Alpine 640E, TNT 399-699	69	Ignition #402-7008	.6	1.6	2.0	35	45			
Nordic 371-371E, Alpine 640E, TNT 399-699	69	Lighting #402-4155						1.7		
Nordic 371-371E, Alpine 640E, TNT 399-699	69	Generator #402-4150						3.0		
Nordic 371-371E, Alpine 640E, TNT 399-699	69	L.H. Winding Top								
Nordic 371-371E, Alpine 640E, TNT 399-699	69	Generator #402-4151						3.0		
Nordic 371-371E, Alpine 640E, TNT 399-699	69	R.H. Winding Bottom								
Nordic 371-371E, Alpine 640E, TNT 399-699	69	Condenser #402-4068						.26	.30	
****Olympique 335D	70	Ignition #402-7008	.6	1.6	2.0	35	45			
Olympique 335D	70	Generator #402-7063						3.5		
Olympique 335D	70	Condenser #402-4068						.26	.30	
****Olympique 399, Nordic 399-399E - 640										
Alpine 399-399E-640E, TNT 399-640-775	70	Ignition #402-7008	.6	1.6	2.0	35	45			

## BOMBARDIER (SKI-DOO) COIL &amp; CONDENSER SPECIFICATIONS (Cont.)

Application	Year	Description and Number	Operating Amperage	Primary Resistance Min., Max.	Secondary Continuity Min., Max.	Resistance	Capacity Reading In Microfarads Min. Max.
Olympique 399, Nordic 399-399E-640							
Alpine 399-399E-640E, TNT 399-640-775	70	Lighting #402-4155					1.7
Olympique 399, Nordic 399-399E-640							
Alpine 399-399E-640E, TNT 399-640-775	70	Generator #402-4150 L.H. Winding Top					3.0
Olympique 399, Nordic 399-399E-640							
Alpine 399-399E-640E, TNT 399-640-775	70	Generator #402-4151 R.H. Winding Bottom					3.0
Olympique 399, Nordic 399-399E-640							
Alpine 399-399E-640E, TNT 399-640-775	70	Condenser #402-4068					.26 .30
****Olympique 300-335, TNT 292-340	70	Ignition #402-4040	1.0	1.5	1.9	40	50
Olympique 300-335, TNT 292-340	70	Condenser #402-4068					.26 .30
****Blizzard 292-340	70	Ignition #402-7008	.6	1.6	2.0	35	45
Blizzard 292-340	70	Lighting #402-4155					1.7
****Blizzard 436-636-776	70	Ignition #402-7008	.6	1.6	2.0	35	45
Blizzard 436-636-776	70	Lighting #402-4155					1.7

\*\*\*\*NOTE: When testing above coils, disconnect the 7-1/2 volt internal battery and connect leads to a 12 volt storage battery for coil power test only.

**BRIGGS & STRATTON CORPORATION SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
**298502	1.6	.2	.3	25	35

\*\* Correction to Operational Manual, page 56

**BRITISH SEAGULL COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
5 4136	1.25	.7	1.3	40	50

**CUSHMAN MOTORS COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
383444	1.0	1.2	1.6	50	60
*580883	1.45	.8	1.2	20	30

\*To check this coil, use C. D. Adaptor, #55-980.

**DELCO-REMY COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Secondary Continuity	
		Min.	Max.
1115043	.55	39	48

**DELCO-REMY CONDENSER SPECIFICATIONS**

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
1965489	.18	.23
**1942948	.27	.31

\*\*Secondary continuity changed from Operational Manual, page 69. (Condenser listed as 194948 in error, should be 1942948.)

## CHRYSLER OUTBOARD CORPORATION COIL SPECIFICATIONS

Chrysler Part No.	Operating Amperage	Primary Resistance		Secondary Continuity		Mfg.	Mfg. No.
		Min.	Max.	Min.	Max.		
12057	1.5	.62	.68	45	55	Fairbanks-Morse	TX2477
12211	1.5	.50	.65	50	60	Wico	X12940
12226	1.4	.48	.54	50	60	Wico	X14381
A12231	1.4	.48	.54	50	60	Wico	X14877
A316475	1.0	1.7	2.3	65	75	Andover	
*321475-1	2.35	too low to read		10	14		
*345475-1	1.7	.2	.24	7	11	Motorola	
**A85475-1	1.0	1.6	2.0	63	72	Andover	
A85475-2	1.0	1.6	2.0	63	72	Andover	
****A91475-1	1.0	3.0	3.6	50	60	Andover	
****2A91475-2	1.2	3	4	53	63	Andover	

## CHRYSLER OUTBOARD CORPORATION CONDENSER SPECIFICATIONS

Chrysler No.	Capacity Reading In Microfarads		Mfg.	Mfg. No.
	Min.	Max.		
12042	.28	.33	Fairbanks-Morse	FS 2433
12117	.16	.20		
12119	.26	.30		
12139	.26	.30	Wico	X11337
12143	.16	.20	Wico	X11397
12178	.16	.20	Wico	X12174
12181	.16	.20	Wico	X12303
12196	.26	.30		
14022-I	.36	.44	Mallory	

\*When testing this coil, use C. D. Adaptor #55-980.

\*\*Change from manual page 64, should be tested with 7-1/2 volt battery.

\*\*\*\*To test coil, disconnect the internal battery and connect leads to 12 volt storage battery. Do not use the 12 volts for any other tests as all other readings will be incorrect.

### JACOBSEN COIL SPECIFICATIONS

Coil No.	Mfg. No.	Operating Amperage	Secondary Continuity	
			Min.	Max.
107897	FG 4081	2.8	40	60
	X16797	1.8	50	60
314303	FG 3294B	2.8	40	60
324094	X12935	1.7	50	60

### JACOBSEN CONDENSER SPECIFICATIONS

Condenser No.	Mfg. No.	Capacity Reading In Microfarads	
		Min.	Max.
314305	FG 3723	.16	.18

### KIEKHAEFER-MERCURY COIL SPECIFICATIONS

Coil No.	Mfg. No.	Mfg.	Operating Amperage	Primary Resistance		Secondary Continuity	
				Min.	Max.	Min.	Max.
398-2568 1A	FG 7202B	Phelon	1.6	.47	.57	45	55

### FISHER-PIERCE COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
90098-P1	.95	1.5	1.7	60	70

### FISHER-PIERCE CONDENSER SPECIFICATIONS

Condenser No.	Mfg. No.	Capacity Reading In Microfarads	
		Min.	Max.
1AT3076T	P2-45	.20	.26

### GALE PRODUCTS OMC COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
678539	1.5	.48	.56	35	45

## KOHLER COIL SPECIFICATIONS

Kohler No.	Engine No.	Mfg.	Mfg. No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
220080	K91	Scintilla	10-70161	(on stator) 2.1 (off stator) 2.4		40 60
231718	K141, K161, K181	Phelon	FG-6547	1.0	40 60	60 75
232901	K241, K301	Phelon	FG-7427	2.1	52 62	
234422	K301, K321, K181, K241	Phelon	FG-7969	2.1	52 62	
C270590	K662	Wico	X12810 (complete magneto XH2062C using above coil)	1.7	60 75	
270775	K662	Fairbanks-Morse	Q2477CX	1.7	50 70	
B270966	K662	Wico	X12609 (complete magneto XH2485C using above coil)	1.7	55 70	
P B B	271144	K662	Wico	X12609	1.7	55 70
**275756	K241	Phelon	FG-1641	2.2	50 70	
****33-145-02	K309-1	Robert Bosch	2-204-211-008	1.0	1.5 1.9	40 50
****34-145-02	K295-1, K309-1, K335-1, K399-2, K440-2, K618-2	Robert Bosch	0-221-500-800	.6	1.6 2.0	35 45
****36-145-02	K618-2	Robert Bosch	2-204-211-009	1.0	1.6 2.0	40 50

\*\*Secondary continuity changed from manual page #89.

\*\*\*\*To test coil, disconnect the internal battery and connect leads to a 12 volt storage battery. Do not use the 12 volts for any other tests as all other readings will be incorrect.

## KOHLER LIGHTING COIL SPECIFICATIONS

Kohler No.	Engine No.	Mfg.	Mfg. No.	Resistance
33-145-04	K295-1, K309-1, K335-1	Robert Bosch	1-214-210-182	.3.5
34-145-03	K399-2, K618-2	Robert Bosch	1-214-210-165	1.6 approx.
34-145-04	K399-2, K440-2	Robert Bosch	1-214-210-184	3.0 approx.
34-145-05	K399-2, K440-2	Robert Bosch	1-214-210-183	3.0

## KOHLER CONDENSER SPECIFICATIONS

Kohler No.	Engine No.	Mfg.	Mfg. No.	Capacity Reading In Microfarads	
				Min.	Max.
**220062	K141, K91, K161	Scintilla	10-79168Y	.18	.23
**230722	K91, K141, K161, KV161, K181, K241, K301, K482	Delco-Remy	1942948	.27	.31
230980	K141, K161	Scintilla	10-126216	.27	.31
231719	K141, K161, K181	Phelon	FG 6548	.24	.28
232813	K241	Phelon	FG 7437	.13	.16
A235648	K241	Phelon	FG 7251	.12	.14
235786	K181, K241, K301, K321	Phelon	FG 7533	.13	.16
266562	L600	Fairbanks-Morse	AX-M-R2433	.18	.23
280969	K662, L600	Fairbanks-Morse	SXY2433	.28	.33
33-147-01	K295-1, K309-1, K335-1, K399-2, K440-2, K618-2	Robert Bosch	1-237-330-037	.26	.30

\*\*Capacity reading changed from manual page 89.

### MALLORY ELECTRIC CORPORATION COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity		Ballist Resistance	
		Min.	Max.	Min.	Max.	Min.	Max.
28670	1.0	.5	.55	60	70	.4	.5
28675	.8	.6	.8	60	70	.74	.82

### MC CULLOCH CORPORATION COIL SPECIFICATIONS

Coil No.	Saw Model No.	Operating Amperage	Primary Resistance		Secondary Continuity	
			Min.	Max.	Min.	Max.
57643	250, 550, 940	1.7	.5	.6	45	55
**57643A		1.5	.48	.55	45	55
67921	10 Series, CP 55, CP 70, 795L, 797, CP 125, 660, 895	1.6	.7	.9	53	63
68707	PM-6, PM-6A	1.45	.9	1.5	50	60
***69798		1.5	.7	.8	55	65

\*\*Replace Coil #55949A (C4) Page 104 of Manual of Operation

\*\*\*Replaces Coil #62927 (E65) Page 104 of Manual of Operation

### O & R ENGINE COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
A-149-3	1.5	.65	.8	48	58

### O & R ENGINE CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading In Microfarads		
		Min.	Max.
FG-8095		.24	.28

## OMC-EVINRUDE & JOHNSON MAGNETO & BATTERY COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
*580688	1.4	too low to read		22	26
*580730	1.4	too low to read		22	26
*580740	1.4	too low to read		22	26
*580847	1.4	too low to read		22	26

Coil #112-931 is replaced with coil #379-569

580571	Ignition driver coil	.8 ohm
580572	Ignition driver coil	.8 ohm

\*To check coil, use C, D, Adaptor, part #55-980.

## ONAN ENGINE/GENERATOR DIVISION OF STUDEBAKER CORP. COIL SPECIFICATIONS

Model No.	Coil Number	Operating Amperage	Primary Resistance		Secondary Continuity	
			Min.	Max.	Min.	Max.
CCKA	160C792 to Spec G	.75	.7	.8	50	60
	166C346 begin Spec G	.9	.87	1.0	60	70
CCKB	166C346	.9	.87	1.0	60	70

## CONDENSER SPECIFICATIONS

Condenser No.	Condenser Microfarads	
	Min.	Max.
312A69	.28	.32

### PRESTOLITE COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
*1DD-1010	1.3	.12	.16	8	10
****201694	.8	3.4	4.2	57	67
201729	3.6	.25	.31	37	47

\*To test coil, use C. D. Adaptor, part #55-980.

\*\*\*\*To test coil, disconnect the internal battery and connect leads to a 12 volt storage battery. Do not use the 12 volts for any other tests as all other readings will be incorrect.

### R. E. PHELON COIL SPECIFICATIONS

Coil No.	Operating Amperage	Secondary Continuity	
		Min.	Max.
FG 1484	2.2	50	70
FG 2731	2.8	40	60
FG 3003	2.8	50	70
FG 3426	1.0	55	75
FG 4213	2.5	45	65
FG 4400	2.5	47	57
FG 5773	2.5	52	62
FG 6109	2.8	45	60
FG 6110	2.8	45	60
FG 6199	2.8	50	70
FG 6201	2.8	50	70
FG 6223	2.8	50	70
FG 6358-B	2.8	45	60
FG 6358-C	2.8	45	60
FG 6503	2.8	45	60
FG 6850	2.8	45	60
FG 6852	2.8	45	60
FG 7106	2.8	45	60
FG 7149	2.8	50	70
FG 7202-B	1.6	45	55
FG 7211	1.8	50	60
FG 7513	2.7	50	65
FG 7601	2.25	60	70
**FG 7670	2.5	60	70
FG 7795	2.1	51	61
**FG 7898	1.7	75	85
FG 7969	2.1	52	62
FG 8054	2.8	50	70
FG 8054-1	2.8	50	70
FG 8119	2.2	54	65
FG 8133	2.2	54	65
FG 8515	2.7	50	65
FG 8619	2.25	60	70
FG 8635	2.6	58	69

\*\*Ground out one secondary terminal while testing other.

R. E. PHELON CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
FG 607-C	.15	.19
FG 7022	.15	.19
FG 7022-B	.15	.19
FG 7047	.18	.22
FG 7146	.18	.22
FG 7157	.15	.19
FG 7184	.24	.28
FG 7224	.15	.19
FG 7239	.18	.22
FG 7437	.12	.17
FG 7437-B	.12	.17
FG 7507	.15	.19
FG 7533-B	.12	.17
FG 7829	.26	.32
FG 7909	.11	.15
FG 8052	.15	.19
FG 8095	.24	.28
FG 8244	.15	.19
FG 8466-S	.17	.23
FG 8589	.15	.19

## ROBERT BOSCH COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
2-204-211-007	1.3	.5	1.1	42	52
****2-204-211-009	1.0	1.6	2.2	40	50

Lighting Coil No.	Resistance
1-214-210-030	.2
1-214-210-076	2.4
1-214-210-077	1.1
1-214-210-105	1.2
1-214-210-106	.55 approx.
1-214-210-107	3.5
1-214-210-159	1.7
1-214-210-160	1.35
1-214-210-161	.1
1-214-210-162	1.25
1-214-210-164	1.18
1-214-210-165	1.6 approx.
1-214-210-182	3.5
1-214-210-183	3.0
1-214-210-184	3.0 approx.
1-214-210-188	1.6

\*\*\*\*When testing above coils, disconnect the 7-1/2 volt internal battery and connect leads to a 12 volt storage battery for coil power test only.

SKI-DOO  
(See Bombardier)

TECUMSEH (LAUSON POWER PRODUCTS) COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
610633	1.7	.5	.6	40	50
**610657	1.4	.85	.95	50	60
*610760	1.5	.9	1.3	25	35
610765	1.7	.45	.55	50	60
610768	1.6	.45	.55	48	58
*610783	1.45	.3	.4	23	33
*610785	1.55	too low to read		55	65
*610792	1.55	too low to read		55	65

\*To check these coils, use C. D. Adaptor #55-980.

\*\*Correction to Operational Manual, Page 90.

TECUMSEH (LAUSON POWER PRODUCTS) CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
610642	.16	.18
610732	.16	.18
610767	.16	.18
For Magneto Stator	Resistance	
	Min.	Max.
610761	.25	.34 (alternator coil assy.)
610764	.3 approx.	
610784	.25	.34
Lighting Coil Stator Windings	.2	.28

### WICO MAGNETO COIL SPECIFICATIONS

Coil No.	Operating Amperage	Secondary Continuity	
		Min.	Max.
X12609	1.7	55	70
X12810	1.7	60	75
X12905B	1.7	55	65
X12910B	1.7	55	65
X12915B	1.7	55	65
X12920B	1.7	55	65
X12935	1.7	55	65
X12935B	1.7	55	65
X12940	1.5	50	60
X12940B	1.7	55	65
X13000B	2.0	50	60
X13313D	1.7	55	65
X13655B	1.7	55	65
X14171E	1.3	55	65
X14276D	1.4	55	65
X14381C	1.4	55	65
X14877C	1.7	55	65
X16330	1.3	55	65
X16343D	1.3	55	65
X16381D	1.8	55	65
X16398C	1.7	55	65
X16825C	1.7	55	65
X16893C	1.7	55	65
X17566B	1.3	55	65
X17605B	1.7	55	65
X30081B	1.1	40	50

### WICO CONDENSER SPECIFICATIONS

Condenser No.		Capacity Reading	
		In Microfarads	
		Min.	Max.
X16781		.16	.20
X16835		.16	.20
X16888		.16	.20
X17767		.16	.20



**1971-72-73**  
**SUPPLEMENTARY**  
**BULLETIN**

**For**  
**Model 98 and 98A**  
**IGNITION**  
**ANALYZER MANUAL**

**PIONEER C.D. IGNITION SYSTEM**  
**Wico Prestalite #FW 2906**  
**As used on Pioneer Chain Saw Model #3071**

**Ignition Coil Testing #X 18122**

To Test This Coil C.D. Adaptor #55-980 must be used.

Operating Amperage	Primary Resistance	Secondary Continuity
1.7	.29 - .34	12 - 18

**Condenser Testing (Refer to page 11, 12 & 13 for testing Procedures)**  
**Condenser #X 18092 - .65 to .75 MFD.**

**Charging Coil Testing #X 18111 (Electronics Group)**

1. Turn selector switch to position #3 Coil Continuity.
2. Clip small red and black test leads together.
3. Turn meter adjustment knob for scale #3 until meter pointer lines up on set position on right side of scale #3.
4. Unclip test leads.

Charging coil has three leads, one red with quick connector, one black with quick connector, and one black with female plug quick connector.

5. Attach black test lead of analyzer to black lead with female plug quick connector. (Be sure alligator clip makes contact in plug quick connector.) For the next three tests this connection will remain the same.
6. Attach red test lead from analyzer to red lead with quick connector.
7. Meter scale #3, in red figures should read approximately 600 ohms + - 5%.
8. Leave black test lead attached to black lead with plug quick connector.
9. Remove red test lead from coil red lead and attach to coil lamination.
10. Meter scale #3, should read approximately 720 ohms + - 5%.
11. Remove red test lead from coil laminations and attach to coil black lead with quick connector.
12. Meter scale #3, should read approximately 600 ohms + - 5%.
13. Remove red and black test lead from charging coil.
14. Attach red test lead to black lead with female plug quick connector. (Be sure alligator clip makes good contact in plug quick connector.)
15. Attach black test lead to lamination, red lead and the other black lead.
16. There should be no meter reading. Should you obtain any reading the pulse pack is defective.
17. Remove red and black test leads from charging coil.
18. Attach red test lead to black lead with quick connector.
19. Attach black test lead to lamination.
20. Meter scale #3 should read approximately 200 ohms.
21. Reverse steps 18 and 19, (red and black test leads). Meter reading should be the same as in step 20.

22. Leave black test lead attached to black lead with quick connector.
23. Remove red test lead from lamination and attach to red lead with quick connector.
24. There should be no meter reading.
25. Reverse steps 22 and 23 (red and black test leads). Again there should be no meter reading.
26. Leave black test lead attached to red lead of coil.
27. Remove red test lead from black lead and attach it to lamination.
28. There should be no meter reading.
29. Reverse steps 26 and 27 (red and black test leads). Again there should be no meter reading.
30. You have completed testing the charging coil.

**ARCTIC CAT COIL SPECIFICATIONS  
KAWASAKI ENGINE**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
3000-062	.8	.8	1.1	35	50
3000-196	.9	.7	.9	45	55
3000-201	.9	.7	.9	45	55
3000-275	.9	.7	.9	45	55
3000-276	1.8	.3	.45	see note	
3000-277	.9	.7	.9	45	55

NOTE: There is no continuity between primary and secondary leads, however, continuity between secondary leads is 50 - 70. See page 23, Figure 26 in manual for test procedure.

**ARCTIC CAT CONDENSER SPECIFICATIONS**

Condenser No.	Capacity Reading in Microfarads	
	Min.	Max.
3000-076	.17	.22
3000-186	.23	.27
Exciting Coil	OHMS	
3000-178	1.4	2.0
3000-290	200	300
Lighting Coil		
3000-063	.35	.45
3000-179	.7	.9
3000-292	.7	.9

### AMERICAN BOSCH COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
TCG 90 A 3S	1.9	.45	.65	47	57
TCG 90 A 4S	1.9	.4	.6	48	58
TCG 90 B 4S	2.3	.15	.35	56	66
*TCJ 3A 1	1.8	2.5	3.5	58	69

\*To test this coil, use C.D. Adaptor Part #55-980.

### ROBERT BOSCH COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
*0-212-940-002	1.6	1.6	2.0	50	60

#### Lighting Coil No.

#### Resistance

1-214-210-120	,12 approx. (not grounded)
1-214-210-195	2.3 approx. (not grounded)
1-214-210-370	1.3

\*To test coil, disconnect the 7½ volt internal battery and connect leads to a 12 volt battery for COIL POWER TEST ONLY.

### BRIGGS & STRATTON COIL SPECIFICATIONS

Supersedes Page 56 of Operational Manual

Coil No.	Engine Models	Operating Amperage	Primary Resistance		Secondary Continuity	
			Min.	Max.	Min.	Max.
29656	A-B-ZZ	.5	.6	.8	40	50
29657	A-B-ZZ	.5	.6	.8	40	50
290880	9-14-19-23-191400-231400	1.15	—	—	36	56
**291617	6-6B-60000-80000	1.7	.3	.5	35	45
291617A		1.7	.25	.35	45	55
292184	6-6B	1.7	.3	.5	35	45
293289	A-B-ZZ	.5	.6	.8	40	50
*293431	9-14-19-23	1.2	.5	.7	50	60
294319	6B	1.7	.3	.5	35	45
295680	6B-60000-80000	1.7	.3	.5	35	45
295845	140000-141000-142000-143000	1.7	.3	.5	35	45
*295915	6B-60000	2.0	.2	.35	40	50
296084	6B	1.7	.3	.5	35	45
296171	{ 80600-81600-80800-81800 } { 84500-85500-84900-85900 }	1.7	.3	.5	35	45
296703	140000-141000-142000-143000	1.7	.3	.5	35	45
296834	140000-141000-142000-143000	1.7	.3	.5	35	45
296858	60000-80000	1.7	.3	.5	35	45
297307	60000-80000 (Use 298502)	1.6	.2	.3	25	35
297320	140000-141000-142000-143000	1.7	.3	.5	35	45
298274	60000-80000	1.6	.2	.3	25	35
298316	100200-100900	1.8	.18	.24	25	35

### BRIGGS & STRATTON COIL SPECIFICATIONS (Cont'd.)

Coil No.	Engine Models	Operating Amperage	Primary Resistance		Secondary Continuity	
			Min.	Max.	Min.	Max.
298443	60000-80000	1.8	.18	.24	25	35
298502	60000-80000	1.6	.2	.3	25	35
298524	100200-100900	1.6	.2	.3	25	35
298654	60000-80000	1.6	.2	.3	25	35
298968	144000-145000-146000-147000 170000-171000-190000-191700 193000-233000-243000-200400 243400-300400-301400-320400 325400	1.6	.18	.24	40	50
299366						
299700						

\*NOTE: There is no continuity between primary and secondary leads, however, continuity between secondary leads is as listed in chart. See page 23, Figure 26 in manual for test procedure.

### BRIGGS & STRATTON CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
29861	.16	.26
291369	.16	.26
294628	.16	.26

### CANADIAN CURTISS WRIGHT COIL SPECIFICATIONS

#### KOKUSAN ENGINE #399CC

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
18-0006-50	.5	1.2	1.8	50	70
18-0008-00	.5	1.2	1.8	50	70

### CANADIAN CURTISS WRIGHT CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading in Microfarads	
	Min.	Max.
18-0004-90	.225	.275
18-0007-40	.225	.275

**CANADIAN CURTISS WRIGHT SPECIFICATIONS (Cont'd.)**

Stator-Ignition Winding	OHMS	
	Min.	Max.
18-0004-60	.9	1.4
18-0007-20	.9	1.4
<b>Lighting Coil</b>		
18-0004-70	.4	.6
<b>Heat Sink Check</b>		
Red lead to heat sink plate		
Black lead to fuse terminal	8	15
Red lead to fuse terminal		
Black lead to heat sink terminal		no continuity
<b>Stator Check</b>		
Red lead to Blue wire		
Black lead to ground	,4	,6

**DELCO-REMY COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
1115070	.55	3.0	4.0	39	49
1115222	.55	3.0	4.0	39	49

**HIRTH COIL AND CONDENSER SPECIFICATIONS**

**Ignition Coil**

Hirth Coil No. 020.13/3 refer to Robert Bosch No. 0-212-940-001

**General Armature**

Hirth Coil No. 021.5/4 refer to Robert Bosch No. 1-214-210-160

Hirth Coil No. 021.18/4 refer to Robert Bosch No. 1-214-210-159

**Condenser**

Condenser No. 021.17/7 refer to Robert Bosch No. 1-237-330-037

## AMERICAN HONDA COIL & CONDENSER SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity		Condenser Capacity Reading In Microfarads	
		Min.	Max.	Min.	Max.	Min.	Max.
*30400-028-014	1.2	1.0	1.6	55	65		
*30400-045-020	1.1	1.4	2.0	60	75		
*30400-074-000	1.4	1.4	1.8	55	65		
*30400-089-672	1.3	1.4	2.0	70	80	.22	.28
30400-107-007	1.2	1.0	1.6	55	70		
30400-114-017	1.3	.8	1.2	40	50	.24	.26
*30400-118-017	1.4	.8	1.2	60	75	.22	.28
30400-303-004	1.0	1.0	1.6	60	75		
*30500-035-004	.7	3.0	5.0	50	65		
*30500-063-004	1.3	2.0	3.0	45	60		
*30500-098-671	1.1	1.6	2.5	55	65		
30500-230-000	1.0	1.0	1.4	60	70		
*30500-300-013	.8	3.0	5.0	(see note)			
*30500-310-670	.9	3.0	5.0	55	65	.22	.28
*30500-918-670	1.1	2.0	3.0	50	65	.22	.28

### Lighting & Excitor Coil

	Resistance
30540-044-004	1.4 ohms approx.
30540-045-670	1.2 ohms approx.
30540-114-004	1.3 ohms approx.
311-918-004	3.5 ohms approx. (coil is grounded)

\*DISCONNECT internal battery and connect leads from analyzer to a 12 volt storage battery or equal. This test is for COIL POWER TEST ONLY. When using the Model 98, do not use the 12 volts for any other tests as readings will be incorrect.

NOTE: There is no continuity between primary and secondary leads, however, continuity between secondary leads is 65 - 75. See page 23, Figure 26 in manual for test procedure.

## JONSEREDS CHAIN SAWS

### TILTON EQUIPMENT COMPANY COIL & CONDENSER SPECIFICATIONS

Coil No.	Model No.	Operating Amperage	Primary Resistance		Secondary Continuity	
			Min.	Max.	Min.	Max.
3917	50, 601, 751, 621, 80	.65	48	58	1.0	1.4

Generator Coil No.	Model No.	Resistance	
		Min.	Max.
3923	601, 751, 621, 80	,8	1.0
391301	50	,6	,8

Condenser No.	Model No.	Capacity Reading In Microfarads	
		Min.	Max.
391901	50	,18	,22
392200	601, 751, 621, 80	,26	,30

### MOTO-SKI COIL & CONDENSER SPECIFICATIONS

#### BSE ENGINE

Coil No.	Engine	Operating Amperage	Primary Resistance		Secondary Continuity	
			Min.	Max.	Min.	Max.
*801065	1972 - 440CC	1.8	1.4	1.8	40	50
801087	1972 - 340CC	1.5	,3	,4	50	60
801101	1972 - 250CC	1.5	,3	,4	50	60
*801125	1973 - 250CC, 340CC, 440CC	1.8	1.4	1.8	40	50

Magneto No.	Engine	Condenser Capacity Reading in Microfarads		Excitor Coil		Alternator Coil
		Min.	Max.	Min.	Max.	
801075	1972 - 440CC	,16	,20	1.0	1.2	,75 - ,8 approx. (grounded)
801081	1972 - 340CC	,25	,29	1.0	1.2	,8 approx. (grounded)
801102	1972 - 250CC	,25	,29	1.0	1.4	,75 - ,8 approx. (grounded)
801145	1973 - 250CC	,16	,20	1.4 ohm approx.		,75 - ,80 approx. (not grounded)
801159	1973 - 340CC, 440CC	,16	,20	1.4 ohm approx.		,75 - ,80 approx. (not grounded)

\*Disconnect internal battery and connect leads from analyzer to a 12 volt storage battery or equal. This test is for COIL POWER TEST ONLY. DO NOT USE THE 12 VOLTS FOR ANY OTHER TESTS AS READING WILL BE INCORRECT.

**KOHLER COMPANY COIL & CONDENSER SPECIFICATIONS**

Kohler No.	Engine No.	Mfg.	Mfg. No.	Operating Amperage	Primary Resistance		Secondary Continuity	
					Min.	Max.	Min.	Max.
231281	{ K 91, K141, K161, K181, K241, K 301 } K321, K331	Delco-Remy	1115070	.55	3.0	4.0	39	49
232897	KV181	Phelon	FG7423-1	2.1			52	62
277449	K482	Phelon	FG7898	1.7			75	85
41-145-01	K141, K161, K181	Phelon	FG7969-1-B	2.1			52	62

**KOHLER LIGHTING COIL SPECIFICATIONS**

Kohler No.	Engine No.	Mfg.	Mfg. No.	Resistance
33-145-01	K295-1, K309-1, K335-1	Robert Bosch	1-214-210-160	1.35 approx.
34-145-01	K399-2, K440-2, K618-2	Robert Bosch	1-214-210-163	1.0 approx.
34-145-06	K295-2, K340-2, K399-2, K440-2AX	Robert Bosch	1-214-210-159	1.0 approx.

**KOHLER CONDENSER SPECIFICATIONS**

Kohler No.	Engine No.	Mfg.	Mfg. No.	Capacity Reading In Microfarads	
				Min.	Max.
234573	KV181			.15	.19
271878	K662	Phelon Mallory	FG7130-B #400	.27	.29

### MC CULLOCH CORPORATION COIL SPECIFICATIONS

Coil No.	Saw Model No.	Operating Amperage	Primary Resistance		Secondary Continuity	
			Min.	Max.	Min.	Max.
57643A	{ Mac 35, 200, 300, 1-40, 400, 1-50, 550, 600, Mac 15, 900 Series }	1.5	.45	.70	46	54
58822	940	1.5	.45	.70	46	54
84957	PM6, MM6	1.5	.70	1.20	50	60
84972	{ Mac 10 series, CP-SP 55-70 and 80, 795, 895, CP125 }	1.5	.60	.90	50	70
85243	SP-125	1.5	.60	.90	50	70

### MERCURY MARINE COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
59300	.5	1.2	1.8	50	70
59301	.5	1.2	1.8	50	70

### MERCURY MARINE CONDENSER SPECIFICATIONS

Condenser No.		Capacity Reading in Microfarads	
		Min.	Max.
59282		.225	.275
59284		.225	.275
<b>Stator-Ignition Winding</b>		Resistance	
		Min.	Max.
59298		.9	1.4
59324		.9	1.4
<b>Lighting Coil</b>			
59299A1		.4	.6
<b>Heat Sink Check</b>			
Red lead to heat sink plate		8	15
Black lead to fuse terminal			
Red lead to fuse terminal		no continuity	
Black lead to heat sink plate			
<b>Stator Check</b>			
Red lead to blue wire		.4	.6
Black lead to ground			

### O & R ENGINES, INC. COIL & CONDENSER SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
400010	1.5	.9	1.5	42	52
Capacity Reading In Microfarads					
	Condenser No.			Min.	Max.
	400293		.16	.20	

### OMC — EVINRUDE & JOHNSON COIL & CONDENSER SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
383444	1.0	1.2	1.6	50	60
*580821 (See Note)	1.4	too low to read		20	30
*580944	1.7	too low to read		20	30
580971	1.6	.5	.7	35	45
*580976	1.7	too low to read		20	30
*580977	1.7	too low to read		20	30
*580981	1.7	too low to read		20	30
581124	1.0	.45	.60	45	55
*581024	1.7	too low to read		20	30
*581032 (See Note)	1.4	too low to read		20	30
*581038	1.7	too low to read		20	30
<b>Ignition driver coil</b>					
580749		.8 ohms approx.			

NOTE: Magneto CD Coils — Connect black lead of tester to orange lead of ignition coil.  
Connect red lead of tester to orange black stripe lead of coil.

NOTE: Coil 112931 is replaced with 383444.

\*To check coil, use CD Adaptor, part #55-980.

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
380537	.18	.23
382125	.18	.23
382136	.27	.29

### ONAN ENGINE/GENERATOR DIVISION OF STUDEBAKER CORP.

#### COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
*166B535	1.9	3.5	4.5	(see note)	(see note)

\*To test coil, use C.D. Adaptor, Part #55-980.

NOTE: There is no continuity between primary and secondary leads, however, continuity between secondary leads is 65 - 75. See page 23, Figure 26 in manual for test procedures.

## R. E. PHELON COMPANY COIL AND CONDENSER SPECIFICATIONS

Coil No.	Operating Amperage	Secondary Continuity	
		Min.	Max.
FG 6240	2.7	55	65
FG 6240-H	2.7	55	65
FG 7423-1	2.1	52	62

**ROCKWELL MANUFACTURING COMPANY  
JLO ENGINE DIVISION  
COIL & CONDENSER SPECIFICATIONS**

**Ignition Coil** — For use on JLO Engine L227, L230, L295, L297, L300, L372, L380, L395, L340, LR 340T2, L399/2, LR 454/2, LR 744/2, LR760/2, LB 600/2, R440/2

JLO Coil No.	Mfg.	Mfg. No.	Operating Amperage	Primary Resistance Min. Max.	Secondary Continuity Min. Max.
*000.43.05.606	Bosch	0-212-940-001	.6	1.6 2.0	50 60

**Generator Armature — For use on JLO Engine L295, L297, L300, L392, L380, L395, LB600/2**

Bosch 1-214-210-160 Resistance 1.35

For use on JLO Engine L340, LR340T2, L399/2, LR454/2, LR744/2, LR760/2

Bosch 1-214-210-159 1.0

**Condenser — For use on JLO Engine L227, L230, L295**

JLO No.	Mfg.	Mfg. No.	Capacity Reading In Microfarads	
			Min.	Max.
000-43-06-520	Bosch	1-237-330-035	13	17

For use on Engine L297, L300, L372, L380, L395, L340, LR340T2, L399/2, LR454/2, LR744/2, LR760/2, LB600/2.

000.43.065.30 Bosch 1-237-330-037 26 30

\*When testing above coil, disconnect the 7½ volt internal battery and connect leads to a 12 volt storage battery for coil power test only.

**RUPP INDUSTRIES COIL & CONDENSER SPECIFICATIONS**

(TOHATSU ENGINE NO. 4155AC01)

Cell No.	Operating Amperage	Primary Resistance		Secondary Continuity		Capacity Reading In Microfarads	
		Min.	Max.	Min.	Max.	Min.	Max.
*17055	1.5	1.0	1.4	45	55		
*17056	1.5	1.0	1.4	45	55		
<b>Condenser No.</b>							
17046						,16	,20
<b>Magneto Booster Coil #1 and #2.</b>							
17047 & 17120				1.0	1.2		

\*To check coil use C.D. Adaptor #55-980

**SACHS COIL & CONDENSER SPECIFICATIONS****Ignition Coil — For use on Sachs Engine SA2-290, SA2-340, SA2-440, SA2-740C**

Sachs' Coil No. 0-283-109-000 refer to Robert Bosch No. 0-212-940-001  
 Sachs' Condenser No. 0-965-091-000 refer to Robert Bosch No. 1-237-330-037

**SKIROULE, LTD. COIL & CONDENSER SPECIFICATIONS**

Skiroule Coil No. 6070-4007 refer to Robert Bosch No. 0-212-940-001  
 Skiroule Condenser No. 6068-4022 refer to Robert Bosch No. 1-237-330-037

## STIHL PARTS, INC., COIL AND CONDENSER SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
1111-404-3200	1.2	.7	.9	48	58
1113-400-1300	1.7	.7	.9	48	58
1114-404-3200	1.4	1.2	1.6	53	68

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
1113-404-3400	.18	.22
1114-404-3400	.18	.22

## TECUMSEH (LAUSON POWER PRODUCTS) COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
**30560	1.6	.45	.55	50	60
32080	.55	3.0	4.0	39	49

\*\*Correction to operational manual, page 90, for units sold prior to fall of 1971.

## TRIUMPH MOTORCYCLE CORPORATION COIL AND CONDENSER SPECIFICATIONS

Coil No.	Mfg.	Operating Amperage	Primary Resistance		Secondary Continuity	
			Min.	Max.	Min.	Max.
*45223	Lucas	2.0	3.2	3.8	40	50

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
54420128	.21	.27
Lighting No.		
**47204	Resistance	
Green/White	1.2	
Green/Black	.6	
Green/Yellow	1.9	
Green/Black	.6	

\*To test this coil, use C. D. Adaptor #55-980.

\*\*Resistance between the leads is an approximate reading. Allow +/- 10%. No lead should be grounded.

**YAMAHA INTERNATIONAL CORP. COIL SPECIFICATIONS  
SNOWMOBILE**

Coil No.	Model No.	Operating Amperage	Primary Resistance		Secondary Continuity	
			Min.	Max.	Min.	Max.
*806-82310-40	SL338B, GP396, SS433	1.9	1.5	2.1	70	80
810-82310-40	SW396	.9	.6	1.0	45	55
810-82320-41	SW396	1.0	.6	1.0	45	55
812-82310-40	SL292	1.0	.6	1.0	45	55

Source Coil No.	Resistance	
806-81312-20	SL338B	1.3
810-81312-20	SW396, GP396	1.8
812-81312-20	SL292, SS433	1.8
*820-81312-50	SR433	1.5

\*(two windings with one side to ground — test from ground to winding — tested together 3.0 reading)

Lighting Coil	Resistance	Color of Lead
**806-81313-20	SL338B	Copper Red Yellow Black
**810-81313-20	SW396, GP396, SS433	.65 approx. .4 approx. .275 approx. .125 approx.
**812-81313-20	SL292	.7 approx. .4 approx. .3 approx. .15 approx.
***820-81313-50	SR433	.75—.85 ohms

\*To check this coil, use C.D. Adaptor #55-980.

\*\*Attach one test lead to ground or lamination.

\*\*\*This coil has 4 leads which are in series. The Yellow and Black leads have 2 wires — These wires must be connected to test coil. Attach one test lead to ground for lamination, the other to Red lead.

**YAMAHA INTERNATIONAL CORP. CONDENSER SPECIFICATIONS**

Snowmobile Condenser No.	Model No.	Capacity Reading In Microfarads
802-81325-20	SL 338B, SW 396, GP 396, SL292	.25
802-81325-50	SR433, SW433	.25

**YAMAHA INTERNATIONAL CORP. COIL SPECIFICATIONS  
MOTORCYCLE**

Coil No.	Model No.	Operating Amperage	Primary Resistance		Secondary Continuity	
			Min.	Max.	Min.	Max.
**168-82310-70	CS3B	1.7	4.0	5.0	53	63
206-82310-40	G6SB	1.1	.5	.8	40	50
214-82310-40	DT1, DT1MX, RT1, RT1MX	1.3	.5	.75	40	50
**227-82310-60	AT1	1.9	3.5	4.5	55	65
*248-82310-10	HT1, AT1MX, CT1, JT1	.8	4.7	5.3	55	65
<b>Source Coil</b>		<b>Resistance</b>				
185-81312-10	HT1	2.4 approx.				
207-81312-20	G6SB	1.2 approx.				
214-81312-21	DT1, DT1MX	1.35 approx.				
<b>Lighting Coil</b>		<b>Resistance</b>		<b>Color Of Lead</b>		
***232-81313-20	G6SB	.55 approx.	Green/Red			
		.35 approx.	Yellow w/quick conn.			
		.2 approx.	Green			
		.05 approx.	Yellow short wire			
***233-81313-20	RT1, DT1	.15 approx.	Copper			
		.075 approx.	Red			
		.05 approx.	Black			
***233-81314-20	RT1, DT1	.15 approx.	Copper			
		.05 approx.	Black			
		.075 approx.	Red			
***251-81313-10	CT1	.75 approx.	Green/Red			
		.15 approx.	Green			
		.15 approx.	Yellow			
***277-81313-10	HT1	.8 approx.	Green/Red			
		.2 approx.	Green			
		.45 approx.	Yellow			

\*Disconnect internal battery and connect lead from analyzer to a 12 volt storage battery or equal. This test is for Coil Power Test Only. Do not use the 12 volts for any other tests as readings will be incorrect.

\*\*To test, use CD Adaptor, part #55-980.

\*\*\*Attach one test lead to ground or lamination

**YAMAHA INTERNATIONAL CORP. CONDENSER SPECIFICATIONS**

**Motorcycle**

Condenser No.	Model No.	Capacity Reading In Microfarads
104-81326-20	G6SB	.22
132-81225-10	CS3B	.22
148-81126-10	CT1, AT1	.22
183-81425-10	HS1B	.22
207-81326-10	JT1, HT 1	.25
207-81313-10	AT1MX	.25
214-81326-20	DT1, DT1MX, RT1, RT1MX	.25
256-81620-10	X51	.22
278-81625-00	R5	.22



**1974-1975**

**SUPPLEMENTARY**

**BULLETIN**

**For**

**Model 73, 98 and 98A**

**IGNITION**

**ANALYZER MANUAL**

# PREFIX

MFG.	PG. NO.
American Bosch .....	3
Arctic Cat.....	3
Chrysler Outboard Corp. ....	4
Delco-Remy .....	4
Echo Chain Saw .....	6-7
Homelite .....	4-5
Husqvarna .....	5
Indian Motorcycle .....	5-6
Jonsereds Chain Saw-Tilton Equipment .....	6
Kioritz Corp. of America .....	6-7
Kioritz Engine (Formerly CCW) .....	6
Kohler .....	8
Mallory .....	8
OMC-Evinrude & Johnson .....	8
Onan .....	9
Phelon .....	9
Polaris .....	9
Prestolite (Wico) .....	10
Robin .....	10
Sears Craftsman Chain Saw .....	6-7
Stihl American Inc. .....	11
Tecumseh Products Co. .....	11
Tilton .....	12

**AMERICAN BOSCH**  
**IGNITION COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
CL521043A	1.3	.5	.7	40	50
TCD 90A4	1.8	.15	.25	30	45
TCD 90B4	1.8	.15	.25	30	45

**ARCTIC CAT**  
**KAWASAKI ENGINE IGNITION COIL SPECIFICATIONS**

Coil No.	Kawasaki Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
			Min.	Max.	Min.	Max.
C*3000 - 062	318505-8123-00	1.0	.8	1.2	35	50
B *3000 - 276	318861-8460-00	1.9	.3	.5	55	65
3000 - 441	318801-8460-03	.9	.7	.9	45	55
3000 - 443	318801-8462-03	.9	.7	.9	45	55
3000 - 540	312651-8123-00	1.5	.6	.8	45	55
3000 - 912	318506-8460-00	.7	.7	.9	50	60
A 3000 - 951	318805-8460-00	1.8	1.3	1.7	40	50
A 3000 - 952	318805-8462-00	1.8	1.3	1.7	40	50
B 3001 - 067	318863-8460-00	1.9	.3	.5	55	65
B 3001 - 136	319881-8431-00	2.0	.3	.5	55	65
B 3001 - 137	319331-8432-00	2.0	.3	.5	55	65
D 3001 - 350	318811-8460-00	3.0	.1 or less		8	15
A 3001 - 447	318821-8460-00	1.8	1.3	1.7	40	50
A 3001 - 448	318821-8462-00	1.8	1.3	1.7	40	50
B 3001 - 461	318822-8462-00	1.9	.3	.5	55	65

- A. When testing this coil use C.D. Adaptor #55-980.
- B. See page 23, figure 26 in manual for test procedure.
- C. Model 98, use a 12 volt storage battery or equal for coil power test only. Disconnect internal battery and connect analyzer battery leads to a 12 volt storage battery or equal. Do not use 12 volts for any other tests as reading will be incorrect. Connect to 12 volt storage battery or equal, place selector switch in the 12 V Position.
- D. This coil must be connected as follows for coil power test.

Step 1. Use C. D Adaptor #55-980

Step 2. Use a 12 volt battery as in foot note (C)

Step 3. Coil polarity must be observed to obtain the proper test. Stretch out the two secondary leads to see which is longer. The longer one must be connected to the single red test lead from the analyzer. The other secondary lead is connected to the small black test lead.

In general the negative primary winding is usually a brown wire.

These specifications supersede all previous specifications of these coils.

\*Correction to 1971-73 Bulletin page 3.

**CHRYSLER OUTBOARD CORP.**  
**IGNITION COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
A*12345	1.4	.48	.54	50	60
12348	1.5	.50	.65	50	60
*474475	1.7	Too low to read		7	11
*510475	1.7	.03	.05	230	260

\* When testing this coil use C.D. Adaptor #55-980

**CONDENSER SPECIFICATIONS**

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
12042-1	.28	.33
12139-1	.26	.30
12181-2	.16	.20
14022-1	.36	.44

**DELCO-REMY**  
**IGNITION COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
**166B 535	.9	3	5	65	75
*166 278	1.5	2.5	3.75	60	70

\* When testing this coil use C.D. Adaptor #55-980

\*\* Model 98, use 12 volt storage battery or equal for coil power test only. Disconnect internal battery and connect analyzer battery leads to a 12 volt storage battery or equal. Do not use 12 volts for any other tests as reading will be incorrect. Connect to the 12 volt storage battery or equal and place selector switch in the 12 V position.

**HOMELITE**  
**IGNITION COIL SPECIFICATIONS**

Homelite Number	Vendor Name	Vendor Number	Operating Amperage	Primary Resistance		Secondary Continuity	
				Min.	Max.	Min.	Max.
32090	Wico	X-7233	1.80			40	60
54421	Wico	X-16809C	1.3			50	60
54747A	Wico	X-17605-B	1.7			40	50
55986A	Phelon	FG-3082-B	2.8			50	70
63998A	Wico	X16835	1.5	.7	.9	45	60
64091	Wico	X16825-D	1.3			50	60
67516	Wico	X17566-B	1.3			55	65
68149	Wico	X18015	1.4			40	55
68256	Phelon	FG8635	2.6			58	69
68716	Wico	X18050	1.5	.7	.9	45	55
69323	Phelon	FG6240-N	2.7			55	65

**HOMELITE (Continued)**  
**CONDENSER SPECIFICATIONS**

<b>Homelite Number</b>	<b>Vendor Name</b>	<b>Vendor Number</b>	<b>Capacity Reading In Microfarads</b>	
			<b>Min.</b>	<b>Max.</b>
32091	Wico	X7228	.16	.20
63250	Wico	X-16329	.16	.20
64086	Wico	X16835	.16	.20
65286	Phelon	FG8589	.15	.19
68711	Wico	X18042	.16	.20
76419	Wico	X11672	.16	.20

**HUSQVARNA**  
**IGNITION COIL SPECIFICATIONS**

<b>Coil No.</b>	<b>Operating Amperage</b>	<b>Primary Resistance</b>		<b>Secondary Continuity</b>	
		<b>Min.</b>	<b>Max.</b>	<b>Min.</b>	<b>Max.</b>
*2 204 211 052	1.6	1.8	2.5	40	55
2 204 211 069	1.5	1.0	1.4	45	55
2 204 211 079	1.5	1.0	1.4	45	55
50 14 659-01	1.4	1.4	1.9	40	50
50 15 410-01	3.0	.3	.5	25	35
BZ 30/6	1.3	1.2	1.6	45	60

\*When testing this coil use C.D. Adaptor #55-980.

**CONDENSER SPECIFICATIONS**

<b>Condenser No.</b>	<b>Capacity Reading In Microfarads</b>		
	<b>Min.</b>	<b>Max.</b>	
6 913 28	.15	.20	
1 237 330 035	.15	.20	
2 207 330 041	.15	.20	

**INDIAN MOTORCYCLE**  
**IGNITION COIL SPECIFICATIONS**

<b>Coil No.</b>	<b>Operating Amperage</b>	<b>Primary Resistance</b>		<b>Secondary Continuity</b>	
		<b>Min.</b>	<b>Max.</b>	<b>Min.</b>	<b>Max.</b>
23001168	1.7	1.0	1.4	45	55
92005011	1.7	1.2	1.6	40	50

**PRIMARY IGNITION COIL WINDING**

<b>Coil No.</b>	<b>Primary Resistance</b>	
	<b>Min.</b>	<b>Max.</b>
23001162	1.2	1.6
23005012	.4	.8
92005002	0.95	1.3

## INDIAN MOTORCYCLE (Continued)

### LIGHTING COIL

Coil No.	Primary Resistance	
	Min.	Max.
23005008	.1	.2
23005009	.1	.2
Test with coils hooked together		
23001163	.2	.4 grounded
92005004 White-Ground	.1	.3
White-Red	.1	.2
Red-Ground	.15	or less
92006002	.1	or less

### CHARGING COILS

Coil No.	Primary Resistance	
	Min.	Max.
23005010		Test with coils hooked together
23005011	.15	or less

### CONDENSER SPECIFICATIONS

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
23001166	.25	.32
92005008	.14	.18

## JONSEREDS CHAIN SAW-TILTON EQUIPMENT IGNITION COIL SPECIFICATIONS

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
391001	2.3	.4	.6	25	35
L-39022	1.2	1.0	1.4	50	65
M-100690	2.0	.4	.6	50	60
T-9408H	1.4	.6	.8	40	55

### CONDENSER SPECIFICATIONS

Coil No.	Primary Resistance Min. Max.	Condenser No.	Capacity Reading In Microfarads	
			Min.	Max.
391302	.4 .6	L-39023 Assembly M-100680 Assembly T-643A31 Assembly	.15	.20

## KIORITZ CORPORATION OF AMERICA ECHO CHAIN SAWS SEARS CRAFTSMAN CHAIN SAW IGNITION COIL SPECIFICATIONS

Kioritz Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
150126-0033-0	1.4	.7	1.0	45	60
150126-0111-0	1.5	.4	.7	35	50
150126-0393-0	1.8	.5	.75	50	65
152126-0333-0	2.0	.4	.7	40	50
153126-0283-0	1.5	.6	.85	40	55
153126-0373-0	1.5	.6	.85	40	55
154126-0343-1	1.8	.5	.8	40	50
156126-0373-0	1.5	.6	.85	40	55

# KIORITZ CORPORATION OF AMERICA (Continued)

## IGNITION PRIMARY COIL WINDING SPECIFICATIONS

Coil No.	Primary Resistance	
	Min.	Max.
18000460	1.1	1.5
18000461	1.1	1.5
18000462	1.4	2.0
18000720	1.1	1.5
18000721	1.1	1.5
18000722	1.1	1.5
18000723	1.4	2.0
19000260	1.3	1.7
25000410	1.0	1.4
25000412	1.2	1.6

## KIORITZ ENGINE (Formerly CCW)

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
18000650	.5	1.4	1.8	40	50
18000651		1.4	1.8	40	50
18000800	.5	1.4	1.8	40	50
18000801		1.4	1.8	40	50
19000500		.6	1.0	50	60
19000541		.6	1.0	50	60
25000520		.3	.5	50	60
25000522		.3	.5	50	60
25000530		.3	.5	50	60
25000532		.3	.5	50	60

## LIGHTING COIL WINDING SPECIFICATIONS

Lighting Coil No.	Primary Resistance		Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.		Min.	Max.
18000470	.4	.6	150127-0033-0	.18	.24
18000471	.75	1.0	150127-0091-0	.18	.24
18000472	.75	1.0	150127-0393-0	.16	.20
18000473	.1	.3	152127-0333-0	.18	.22
18000474	.1	.3	153127-0283-0	.16	.22
19000270	1.3	1.7	154127-0343-0	.16	.20
25000420	.8	1.0	156127-0373-0	.18	.22
36001380	.1	.3	18000490	.22	.30
36001381	.15	.35	18000491	.16	.22
			18000492	.16	.22
			18000740	.22	.30
			18000741	.16	.22
			19000280	.19	.27
			19000480	.19	.27
			25000430	.23	.31
			25000460	.23	.31
			36001320	.22	.28
			36001321	.26	.34
			36001322	.26	.36
			36001330	.22	.28

**KOHLER**  
**IGNITION COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
277375	1.5	4	6	70	80
275213	1.7	2.5	2.6	35	45

**MALLORY**  
**IGNITION COIL SPECIFICATIONS**

Coil No.	Primary Resistance		Secondary Continuity	
	Min.	Max.	Min.	Max.
28880	.1	or less	10	20
28900	1.9	2.6	20	30
29150	.7	.9	10	20

**OMC - EVINRUDE & JOHNSON**  
**IGNITION COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
112931	.8	1.5	1.7	60	70
*581370	1.7	.8	1.2	60	70
*581407	1.7	.8	1.2	60	70
*581503	2.1	.1	or less	15	25
*581609	2.1	.1	or less	15	25
*581610	2.1	.1	or less	15	25

\*When testing this coil use C.D. Adaptor #55-980.

Coil No.	Primary Resistance	
	Min.	Max.
581130	.6	1.0
5812022	1.0	1.9
581557	2.2	3.2

**CONDENSER SPECIFICATIONS**

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
581419	.25	.29

**ONAN**  
**IGNITION COIL SPECIFICATIONS**

<b>Coil No.</b>	<b>Operating Amperage</b>	<b>Primary Resistance</b>		<b>Secondary Continuity</b>	
		<b>Min.</b>	<b>Max.</b>	<b>Min.</b>	<b>Max.</b>
**166B 535	.9	3.0	5.0	65	75
*166 278	1.5	2.5	3.75	60	70

\* When testing this coil use C.D. Adaptor #55-980.

\*\* Model 98, use 12 volt storage battery or equal for coil power test only. Disconnect internal battery and connect analyzer battery leads to a 12 volt storage battery or equal. Do not use 12 volts for any other tests as reading will be incorrect. Connect to 12 volt storage battery or equal and place selector switch in the 12 V position.

**PHELON**  
**CONDENSER SPECIFICATIONS**

<b>Condenser No.</b>	<b>Capacity Reading In Microfarads</b>	
	<b>Min.</b>	<b>Max.</b>
FG 9072	.15	.19
FG 9221	.15	.19

**POLARIS**  
**IGNITION COIL SPECIFICATIONS**

<b>Coil No.</b>	<b>Operating Amperage</b>	<b>Primary Resistance</b>		<b>Secondary Continuity</b>	
		<b>Min.</b>	<b>Max.</b>	<b>Min.</b>	<b>Max.</b>
*3080838	1.7	1.4	1.8	40	50
*3081177	1.9	1.4	1.8	40	50
*3081272	1.7	1.4	1.8	40	50
***3081303	2.0	.35	.45	55	65
**3081389	2.7	.15	or less	20	30
3081573	1.9	.1	.2	45	55
3081603	1.2	.5	.7	60	70
***3081627	2.0	.35	.5	55	65
*3081974	1.7	1.4	1.8	40	50
3081980	1.6	.1	.2	45	55

\* Disconnect internal battery and connect battery leads from analyzer to a 12 volt storage battery or equal. This test is for COIL POWER TEST ONLY. DO NOT USE THE 12 VOLTS FOR ANY OTHER TEST AS READING WILL BE INCORRECT.

\*\* When testing this coil use C.D. Adaptor #55-980.

\*\*\* There is no continuity between primary and secondary leads, however, continuity is between secondary leads. See page 23, Figure 26 in manual for test procedure.

**CONDENSER SPECIFICATIONS**

<b>Coil No.</b>	<b>Capacity Reading In Microfarads</b>	
	<b>Min.</b>	<b>Max.</b>
3081133	.22	.27
3081569	.24	.30
3081732	.24	.28
3081970	.22	.27

**PRESTOLITE (WICO)**  
**IGNITION COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
*FAC3004	1.4	.1	or less	5 (100-300 ohms)	Approx.
*FAC3006	1.4	.1	or less	5 (100-300 ohms)	Approx.
FWM10355	1.6	.7	.9	45	60
FWM10385	1.9	.4	.6	45	60
FWM2003	1.5	.6	.8	45	60
FWM3003	1.9	.55	.75	40	55
FWM3005	1.8	.5	.7	40	50
X17462 C	1.5	.7	.9	45	60
X17818	1.4	.6	.8	40	55
X17865	1.4			40	55
X18015	1.4			40	55
X18050	1.5	.7	.9	45	55
X18122 B	1.7			12	18
X18128	1.6			40	55
X18163	1.6			40	55
X18248 S		.35	.55	45	60

\*When testing this coil use C.D. Adaptor #55-980.

**CONDENSER SPECIFICATIONS**

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
17895	.16	.20
FWM1024	.16	.20
X17767	.16	.20
X17979	.16	.20
X18042	.16	.20
X18059	.16	.20

**ROBIN SPECIFICATIONS**  
**IGNITION COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
1297013008/EC07-2G	1.4	.65	.85	30	45
*H4Q-396/EC 17F	.9	1.4	1.8	45	55
*H4S-434-2/EC 10G	1.5	.8	1.2	55	65

\* Model 98 use a 12 volt storage battery or equal for coil power test only. Disconnect internal battery and connect analyzer battery leads to a 12 volt storage battery or equal. Do not use 12 volts for any other tests as reading will be incorrect. Connect 12 volt storage battery or equal and place selector switch in the 12 V position.

MODEL 98A Connect to 12 volt storage battery or equal and place selector switch in the 12 V position.

**STIHL AMERICAN, INC.**  
**IGNITION COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
2 204 211 052	1.6	1.8	2.5	40	55
2 204 222 022	1.2	.8	1.2	55	65
*FG943	1.6	.7	1.1	50	60

\*When testing this coil use C.D. Adaptor #55-980.

**CONDENSER SPECIFICATIONS**

Condenser No.	Capacity Reading In Microfarads		
	Min.	Max.	
2207330041	.16	.22	
FG9072A	.15	.20	

**TECUMSEH PRODUCTS CO.**  
**IGNITION COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
610633	1.8	.4	.6	40	50
*610785A	1.55	to low	to read	5	8
610747					
610748					
610749					
610759					
610774					
610775					
610784					
610803					
610815					
610831					
610844					
610851					
610851A					
610873					
610906					
610910					
610958					

When testing these coils use C.D. Adaptor #55-700

\*When testing this coil use C.D. Adaptor #55-980

**CONDENSER SPECIFICATIONS**

Condenser No.	Capacity Reading In Microfarads		
	Min.	Max.	
32079	.18	.23	
610161	.18	.23	
610416	.16	.20	

**TILTON EQUIPMENT COMPANY**  
**IGNITION COIL SPECIFICATIONS**

Coil No.	Operating Amperage	Primary Resistance		Secondary Continuity	
		Min.	Max.	Min.	Max.
*391002	1.5	.4	.6	25	35

\*When testing this coil use C.D. Adaptor #55-980.

**CONDENSER SPECIFICATIONS**

Condenser No.	Capacity Reading In Microfarads	
	Min.	Max.
100680	.15	.19
L39023	.15	.19